


**Deadend, Straight line, Spring
Loaded, Side opening, #4 (7 str) -
2/O (19 str) AL, #6 (6/1) - 2/O (6/1)
ACSR**

By ANDERSON
Catalog # [ASOD3981N](#)

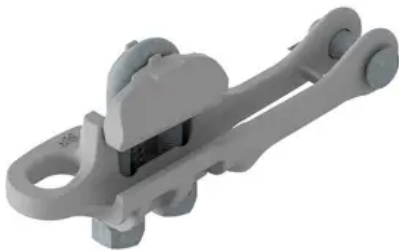

*Representative Image

Deadend, Straight line, Spring Loaded, Side opening, #4 (7 str) -
2/O (19 str) AL, #6 (6/1) - 2/O (6/1) ACSR, Conductor Range 0.18
- 0.48 in, Fitting: None.

Features

- Spring Loaded Vertical Keeper for Easy Installation
- Add "S" for socket or "C" for clevis fitting options

General

Catalog Number	ASOD3981N
Fitting Type	None
Material	Aluminum Alloy; Steel
Material - Body	356 T6 Aluminum Alloy
Material - Bolt	Galvanized Steel
Material - Hardware	Galvanized Steel
Material - Keeper	356 T6 Aluminum Alloy
Product Category	Straight Line
Strength Rating - Ultimate	6000 lb
Body	
Style	ASOD
Type	Bolted
U-Bolts	1
UPC	096359363118

Dimensions

Diameter - Bolt	0.375 in
Diameter - Pin	0.625 in
Length	8 in

Weight	1.28 lb
Width	0.7 in

Conductor Related

Conductor Diameter - Maximum	0.48
Conductor Diameter - Minimum	0.19
Conductor Diameter Range	0.19 - 0.48

Certifications And Compliance

Buy America(n) Qualified	TAA Compliant (All status valid till December 2024)
--------------------------	--

Logistics

Pallet Quantity	1200
-----------------	------

Product Assets

[Catalog Page - ASOD Catalog Page](#)
[Catalogs - Distribution Connectors](#)
[Installation Manuals - ASOD_install instructions](#)
[Literature - Deadends For Overhead Connections](#)
[Literature - Ropes Course Industry Letter \(April 2021\)](#)
[Sales Drawings - AL, Side Opening Deadend Clamp \(CC-17236\)](#)
[Specifications - ASOD3981N](#)