HYDAPIPE®
Surface Mounted Shower System

☐ **1-805S:** ***Standard length***
☐ **1-806S:** ***Short length***

Pressure Balancing mixing valve integral service stops and adjustable stop screw to limit handle turn. Super shower head on institutional type head bracket fitting. Attached soap dish and matching horizontal supply covers and all fittings for direct connection to 1-1/2" copper horizontal supplies. 1-1/2" tubing not supplied by manufacturer. Stainless steel covering to be 18 gauge with #4 brush finish.


Modifications:

Add:

☐ **Suffix 285:** *Fre-Flo, all brass, fixed spray (no ball joint)*
☐ **Suffix 21:** *Single supply, manual shut off, 4 arm handle*
☐ **Suffix 60:** *Single supply, metering shut off*
☐ **Suffix 56:** *Pressure Balance and metering combination*

Delete:

☐ **Suffix S:** *If soap dish is not required*

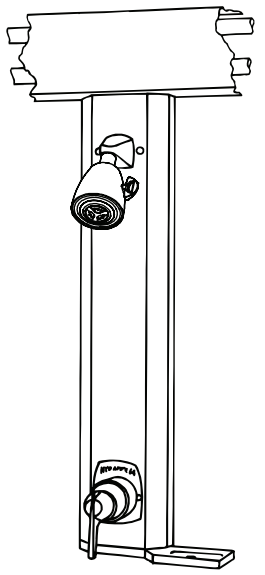

SYMMONS PRODUCTS MEET ANSI A112.18.1M, EPA '92 AND ALL KNOWN FLOW RATE REQUIREMENTS.
Shower Heads and Hand Showers 2.5 GPM (9.5 L/min)

Job/Location

. . . . . .

. . . . . .

Engineer

. . . . . .

. . . . . .

Contractor

. . . . . .

. . . . . .

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.

Symmons Industries, Inc. ▪ 31 Brooks Drive ▪ Braintree, MA 02184
(800) 796-6667, (781) 848-2250 ▪ Fax (800) 961-9621, (781) 843-3849
Website: www.symmons.com ▪ Email: customerservice@symmons.com

©2011 Symmons Industries, Inc. Printed in U.S.A. ▪ 062011

SYMMONS®
the smart choice™