


I PORT CONNECT PRO


CONNECT Pillar Install

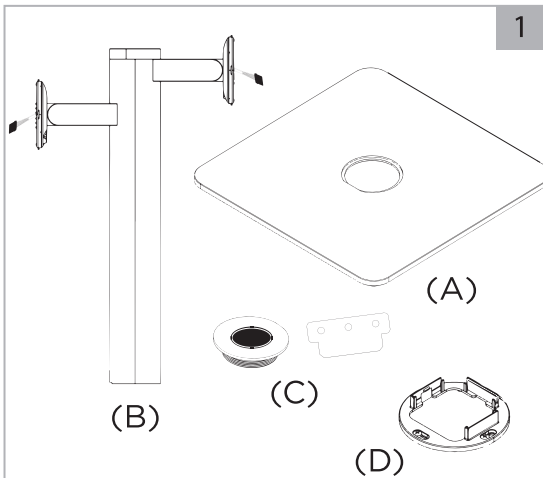


Remove from the box...

- (A) Pillar Base
- (B) Pillar Two Mount
- (C) Mounting Nut and Key
- (D) PoE+ Mounting Ring


Note: 2 Connect PoE+ Network Adapters are required.

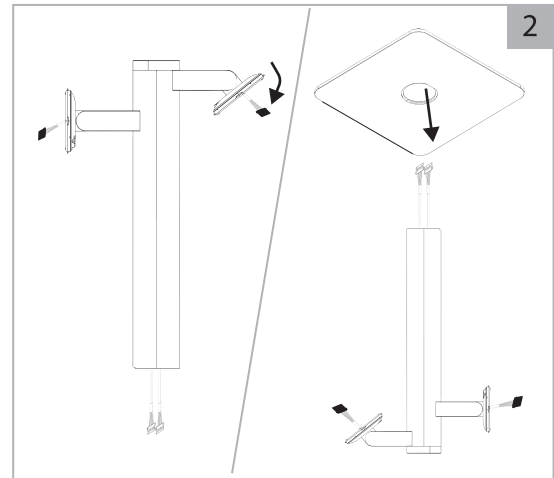

Rotate the top Mount head temporarily downward and flip the Pillar upside down to stand on its flat top. Feed the cables through the hole in the plate and rest the plate on the Pillar aligning the notch between the two parts.

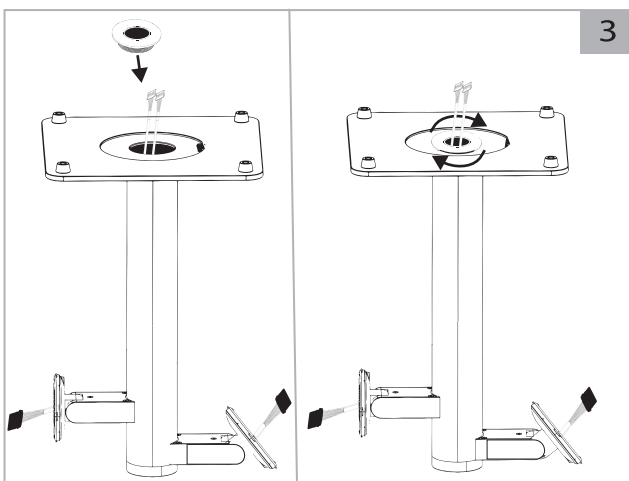


While holding the baseplate in place, feed the cables through the mounting nut. Spin the mounting nut clockwise into the pillar until it is tight.

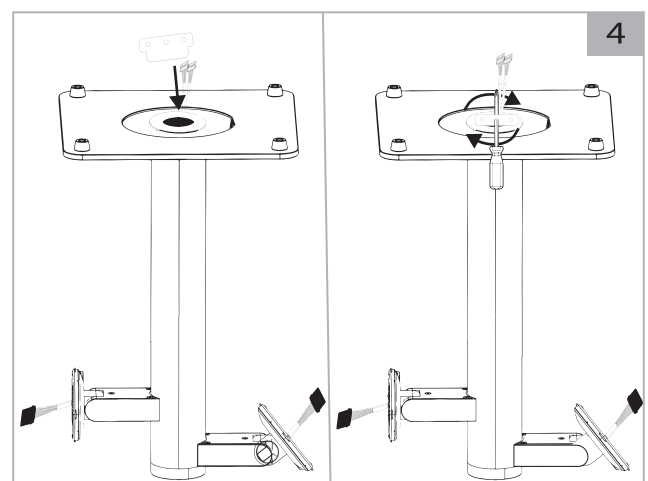


Insert the provided key wrench into the mounting nut slots and tighten by hand. Insert a screwdriver into one of the holes in the wrench to use extra leverage in tightening the nut.


I PORT CONNECT PRO

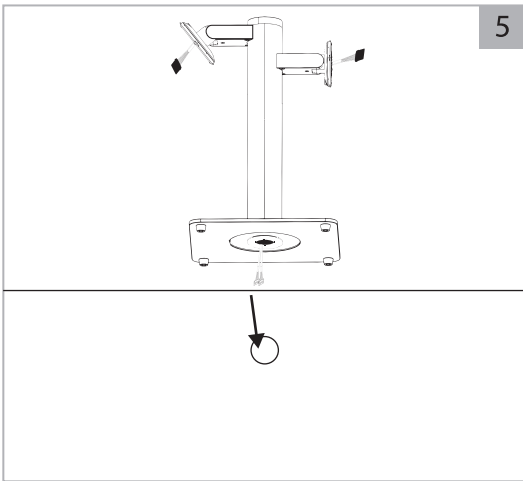

Feed the exposed wires through a hole in the table where the pillar will be installed.

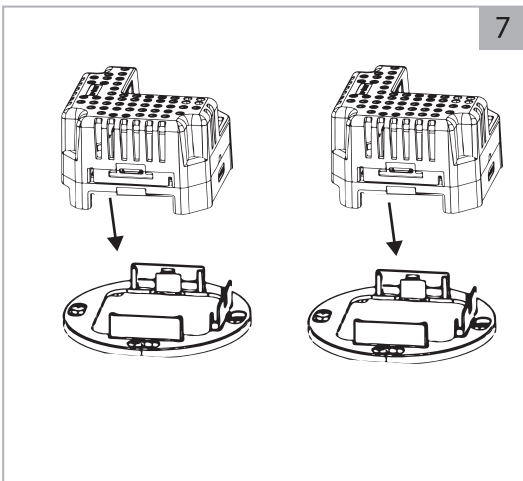


Attach the PoE+ mounting rings to the under side of the table where the Pillar is installed and clip the PoE+ Adapters onto the mount.

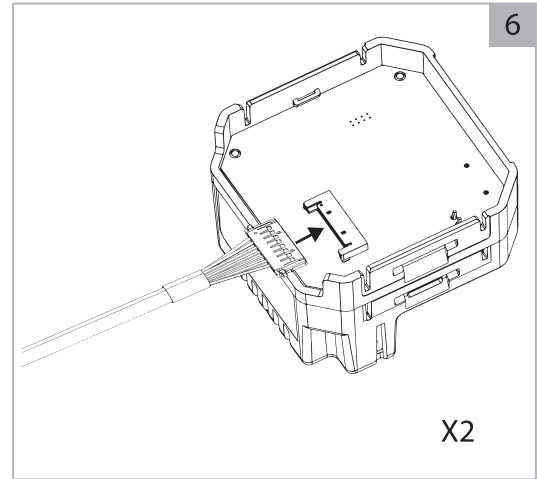

Attach the Pillar cable into the MoLEX connector of the PoE+ Network adapter.


Note: It only connects in one orientation. No force is required.

Insert the CAT6 cable into the PoE+ Network Adapter RJ45 Connector. Verify the Green lights appear on the underside of the PoE+ Network adapter.

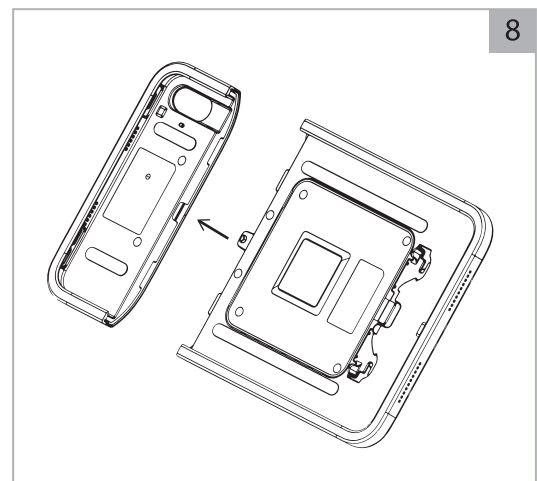


Remove the Sleeve Top From the CONNECT Case.


I PORT CONNECT PRO

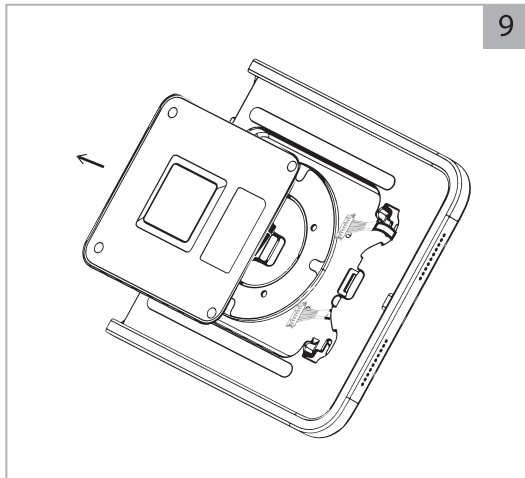


Remove the Electronics Cover from the inside of the Case.

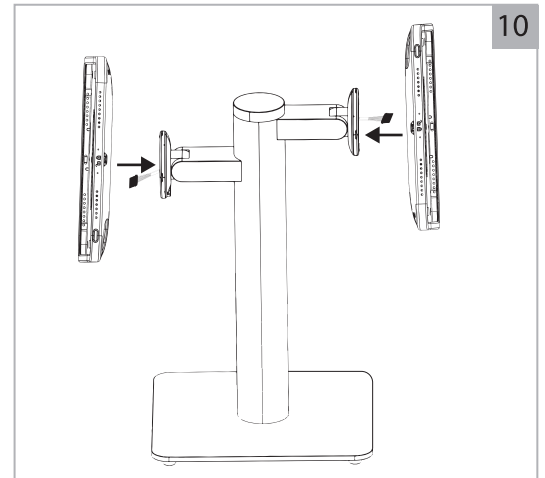

Place one or both Cases onto the Pillar head make sure to feed the cable through the center of the Case.

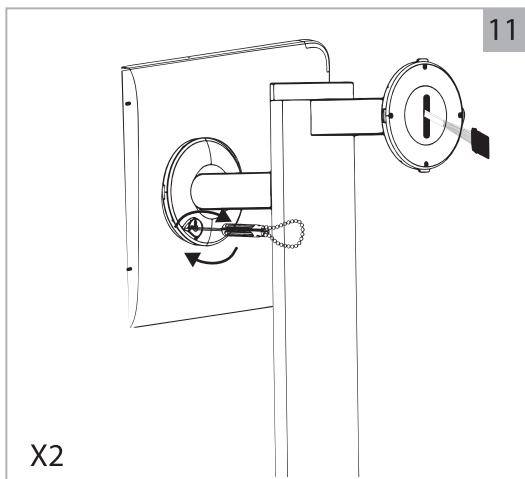


Insert the provided IPORT Security tool into the round lock on the back of the Mount Head, and rotate clockwise to lock the case to the Pillar.

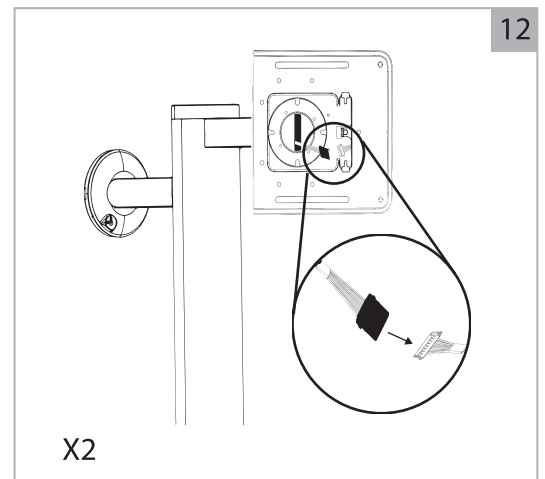


Insert the male Case Molex cable into the female Pillar Molex connector and ensure the retention cover is secured.


I PORT CONNECT PRO

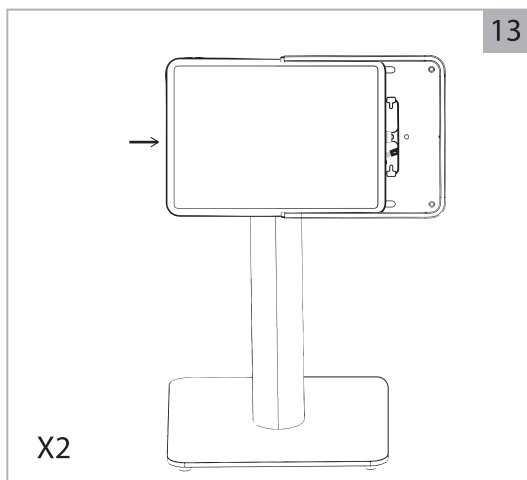


Insert the iPad into the Case ensuring the iPad is seated fully into the bottom of the Case and the USB-C connection.

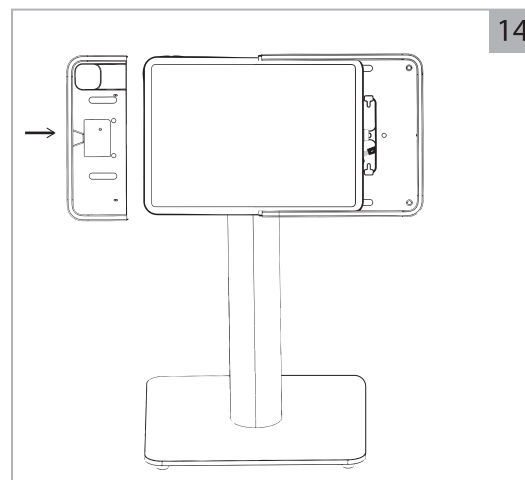

Reinstall the Case Top onto the iPad and Case making sure to fully snap the Case Top in place.

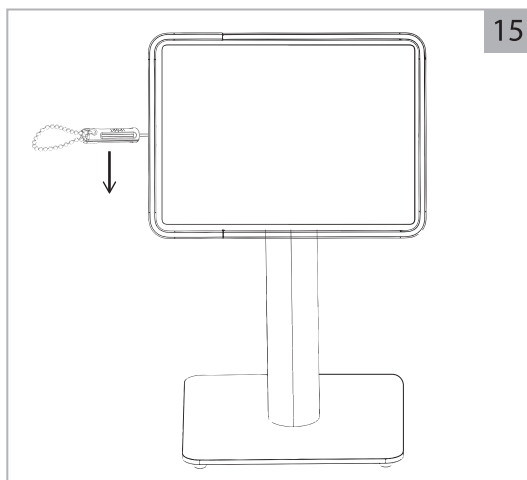

Insert the provided IPORT Security tool into top of the Case and slide towards the lock position securely locking the iPad into the Case.

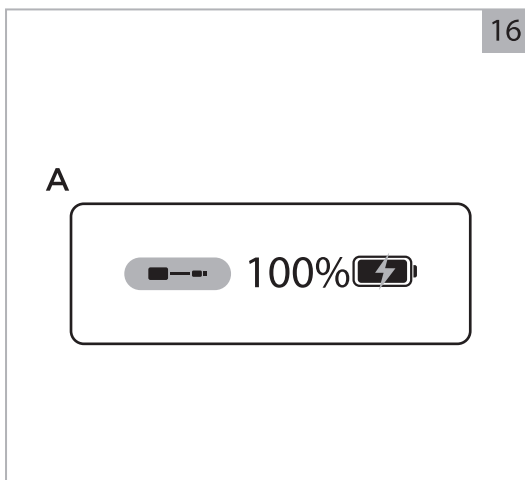

To verify the iPad is receiving power and Internet from the PoE+ Network Adapter, check the Battery icon (A) in the top right corner of the iPad screen.