

deako

Product Cut Sheets



sixteen **5** hundred


Table of contents

Backplates	2
Quick Wire Backplates	2
Wired Backplates	6
Simple devices	9
Single Pole Simple Rocker Switch	9
3-Way & 4-Way Simple Rocker Switch	11
Simple Dimmer	13
Simple Motion Switch	15
Simple Ceiling Fan Controller	17
Smart devices	19
Smart Switch	19
Smart Dimmers	21
Smart Scene Controller Switch	24
Smart Scene Controller Dimmer	26
Smart Plug	28
Faceplates	30
Faceplates	30

Series
DS-BP

Quick Wire Backplates

Deako Backplates for Deako Switches

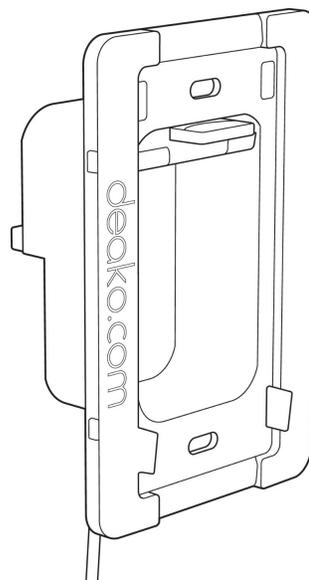

Deako's backplate is specifically designed for all Deako switches and comes ready to install in your home. The backplate allows for switches to easily be clicked in and out, allowing for flexibility in Smart Switch, Simple Switch, and Smart Dimmer placement.

Installation is quick and easy with the use of push-in wire connectors on the rear of the backplate. Compatible with all NEC compliant light circuit wiring such as single-pole, 3-way, and 4-way configurations.

Features

- Works with any Deako switch - smart or simple
- Deako backplates are compatible with 14AWG solid core wire for other wiring options - please contact your Deako account manager for more details
- Included mounting hardware

Series
DS-BP

Specifications

Quick Wired Backplates


	1-Gang Quick Wire Backplate	2-Gang Quick Wire Backplate	3-Gang Quick Wire Backplate	4-Gang Quick Wire Backplate
SKU	DS-BP1Q-WHNL-UCX	DS-BP2Q-WHNL-UCX	DS-BP3Q-WHNL-UCX	DS-BP4Q-WHNL-UCX
Dimensions (H x W x D)	4.45" x 2.93" x 1.73"	4.45" x 4.75" x 1.73"	4.45" x 6.57" x 1.73"	4.45" x 8.34" x 1.73"
Weight	2.3 oz	4.3 oz	6.2 oz	8.2 oz
Min. j-box interior (W x D)*	2.9" x 1.8"	4.7" x 1.7"	6.5" x 1.7"	8.3" x 1.7"
Faceplate compatibility / SKU	1-Gang Faceplate	2-Gang Faceplate	3-Gang Faceplate	4-Gang Faceplate
	DS-FP1Y-WHWH-UCX	DS-FP2Y-WHWH-UCX	DS-FP3Y-WHWH-UCX	DS-FP4Y-WHWH-UCX
Compatibility	Single pole, 3-way, 4-way and dead-end circuits			
	Deako Faceplate DS-FP series			
	Deako Switches DS-SS, DS-CS, & DS-CD series			
	All standard NEC compliant junction boxes (<i>Deako recommends 2.5" depth for ease of installation</i>)			
Regulatory Approvals	cULus Listed (UL514D)			
Power	120V AC 15A			
Environment	Indoor use only			
Operating temperature range	0°C to 40°C (32°F to 104°F)			
Warranty	1-year			
Vertical Markets	Residential			
	Multiple dwellings			
	Hospitality / lodging			

*dimensions shown are representative of the the smallest recommended size for the junction box interior


Series
DS-BP

Available configurations


For Deako Quick Wire Backplates




1-Gang



2-Gang

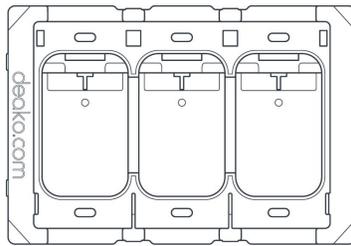

3-Gang

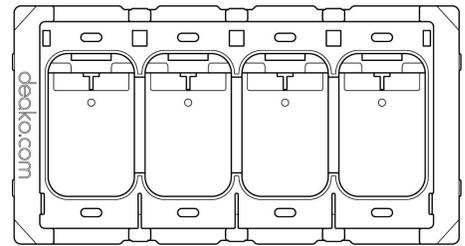


4-Gang

Date	Notes
Job location	
Approved by	
Job no. / type	

Series
DS-BP

Specifications

Wired Backplates

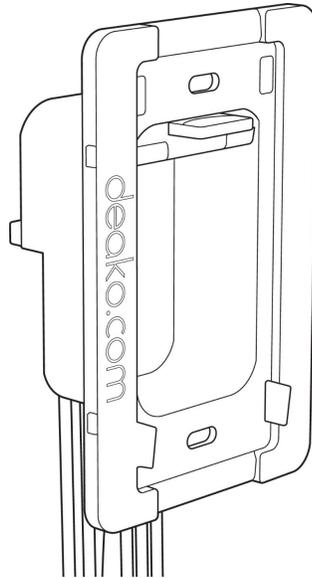

Deako's wired backplate is specifically designed for 10 and 12AWG wire and all Deako switches. The Deako backplate allows for switches to easily be clicked in and out, allowing for flexibility in Smart Switch, Simple Switch, and Smart Dimmer placement.

Installation is quick and easy with the use of the hard wired (14-gauge, 41 strand flexible wire on the rear of the backplate). Compatible with all NEC compliant light circuit wiring such as single-pole, 3-way, and 4-way configurations.

Features

- Works with any Deako switch - smart or simple
- Included mounting hardware
- Deako Wired backplates with outlet include a safety insert to aid with seamless integration

Series
DS-BP

Specifications

Wired Backplates

Standard Deako Wired Backplates

	1-Gang Wired Backplate	2-Gang Wired Backplate	3-Gang Wired Backplate	4-Gang Wired Backplate
SKU	DS-BP1X-WHNL-UCX	DS-BP2X-WHNL-UCX	DS-BP3X-WHNL-UCX	DS-BP4X-WHNL-UCX
Dimensions (H x W x D)	4.45" x 2.93" x 1.73"	4.45" x 4.75" x 1.73"	4.45" x 6.57" x 1.73"	4.45" x 8.34" x 1.73"
Weight	3.2 oz	6.3 oz	9.2 oz	12.2 oz
Min. j-box interior (W x D)*	1.9" x 2.7"	1.6" x 2.7"	5.5" x 2.7"	7.2" x 2.7"
Faceplate compatibility / SKU	1-Gang Faceplate	2-Gang Faceplate	3-Gang Faceplate	4-Gang Faceplate
	DS-FP1Y-WHWH-UCX	DS-FP2Y-WHWH-UCX	DS-FP3Y-WHWH-UCX	DS-FP4Y-WHWH-UCX


Deako Wired Backplates with Outlet

	2-Gang Backplate with Outlet Left	2-Gang Backplate with Outlet Right	3-Gang Backplate with Outlet Left	3-Gang Backplate With Outlet Right
SKU	DS-BP2X-WHNL-UCL	DS-BP2X-WHNL-UCR	DS-BP3X-WHNL-UCL	DS-BP3X-WHNL-UCR
Dimensions (H x W x D)	4.45" x 6.57" x 1.73"		4.45" x 8.34" x 1.73"	
Weight	4.5 oz		7.5 oz	
Min. j-box interior (W x D)*	3.6" x 2.7"		5.5" x 2.7"	
Faceplate compatibility / SKU	2-Gang Faceplate with Outlet		3-Gang Faceplate with Outlet	
	DS-FP2Y-WHWH-UCL		DS-FP3Y-WHWH-UCL	


*dimensions shown are representative of the the smallest recommended size for the junction box interior

Available configurations


For Deako Wired Backplates




1-Gang




2-Gang




3-Gang

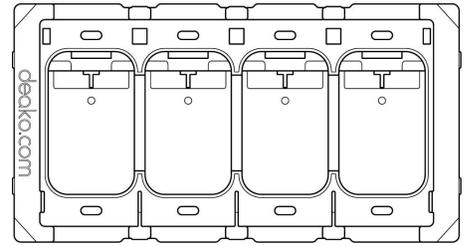


4-Gang




2-Gang with Outlet Left




2-Gang with Outlet Right



3-Gang with Outlet Left

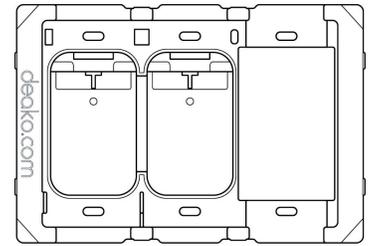

3-Gang with Outlet Right



Safety Insert

Deako Wired backplates with outlet include a safety insert to aid with seamless integration

Series
DS-BP

Specifications Continued

Wired Backplates

Compatibility	Single pole, 3-way, 4-way and dead-end circuits
	Deako Faceplate DS-FP series
	Deako Switches DS-SS, DS-CS, & DS-CD series
	All standard NEC compliant junction boxes (<i>Deako recommends 2.5" depth for ease of installation</i>)
Regulatory Approvals	cULus Listed (UL514D)
Power	120V AC 15A
Environment	Indoor use only
Operating temperature range	0°C to 40°C (32°F to 104°F)
Warranty	1-year
Vertical Markets	Residential
	Multiple dwellings
	Hospitality / lodging


Date	Notes
Job location	
Approved by	
Job no. / type	

SKU

DS-SS1N-WHNL-UCX

Single Pole Simple Rocker Switch

Easy to control paddle rocker switch

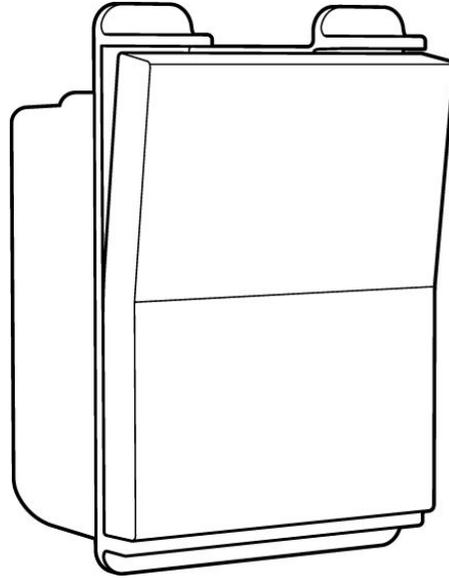

A beautifully designed rocker switch for any room in the home. The Deako simple pole rocker switch offers a smooth operation. The paddle rocker switch is easy to control and made from high-impact resistant thermoplastic for extended service life. Deako's faceplates and backplates are specifically designed for all Deako switches and come ready to install in your home. The faceplate can easily be removed to click switches in and out of the backplate, allowing for flexibility in switch placement.

Features

- Features a large paddle that turns the light or fan on/off
- Smooth operation
- The rocker switch can easily be changed out to upgrade to a Deako smart product

Applications

- Works in all single pole applications
- Use With Deako backplate and faceplate for a seamless fit

SKU

DS-SS1N-WHNL-UCX

Specifications

Single Pole Simple Rocker Switch

Dimensions (H x W x D)	1.77" X 1.70" X 3.50"
Weight	2 oz
Compatibility	Single pole circuits
	Deako Faceplate DS-FP series
	Deako Backplate DS-BP series
	Neutral wire required for future upgrades
Supported Currents & Load Types	15A general use
Regulatory Approvals	cULus Listed (UL20)
Environment	Indoor use only
Operating temperature range	0°C to 40°C (32°F to 104°F)
Color	White
Warranty	1-year
Vertical Markets	Residential
	Multiple dwellings
	Hospitality / lodging

Also Available in the Deako Switch Family

- Simple Ceiling Fan Controller
- Simple Motion Switch
- Simple Dimmer
- Smart Switch
- Smart Dimmer
- Smart Scene Controller Switch
- Smart Scene Controller Dimmer
- Smart Plug


Date	Notes
Job location	
Approved by	
Job no. / type	

SKU

DS-SS4N-WHNL-UCX

3-Way & 4-Way Simple Rocker Switch

Easy to control paddle rocker switch

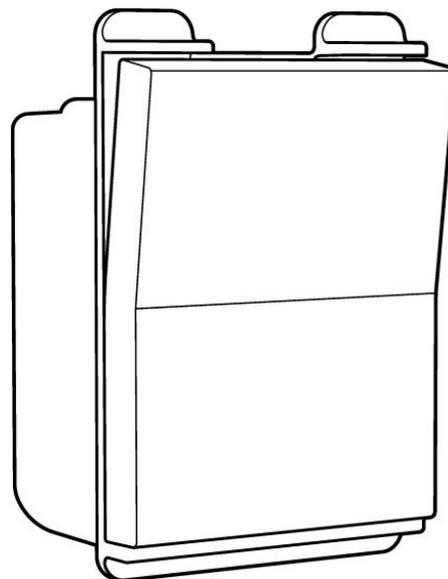

Modern, sleek design that perfectly enhances your room. Switches offer a smooth operation. The paddle rocker switch is easy to control and made from High-impact resistant thermoplastic for extended service life.

Deako's faceplates and backplates are specifically designed for all Deako switches and come ready to install in your home. The faceplate can easily be removed to click switches in and out of the backplate, allowing for flexibility in switch placement.

Features

- Features a large paddle that turns the light or fan on/off
- Smooth operation
- The rocker switch can easily be changed out to upgrade to a Deako smart product

Applications

- Works in 3-way applications, or 4-way applications where light or fan is controlled from 2 or more switches
- Use With Deako backplate and faceplate for a seamless fit

SKU

DS-SS4N-WHNL-UCX

Specifications

Simple Rocker Switches

Dimensions (H x W x D)	1.77" X 1.70" X 3.50"
Weight	2 oz
Compatibility	Single pole, 3-way or 4-way circuits
	Deako Faceplate DS-FP series
	Deako Backplate DS-BP series
	Neutral wire required for future upgrades
Supported Currents & Load Types	15A general use
Regulatory Approvals	cULus Listed (UL20)
Environment	Indoor use only
Operating temperature range	0°C to 40°C (32°F to 104°F)
Color	White
Warranty	1-year
Vertical Markets	Residential
	Multiple dwellings
	Hospitality / lodging

Also Available in the Deako Switch Family

- Simple Ceiling Fan Controller
- Simple Motion Switch
- Simple Dimmer
- Smart Switch
- Smart Dimmer
- Smart Scene Controller Switch
- Smart Scene Controller Dimmer
- Smart Plug


Date	Notes
Job location	
Approved by	
Job no. / type	

SKU

DS-SD3N-WHNL-UCV

Simple Dimmer

Vertical slide control dimming

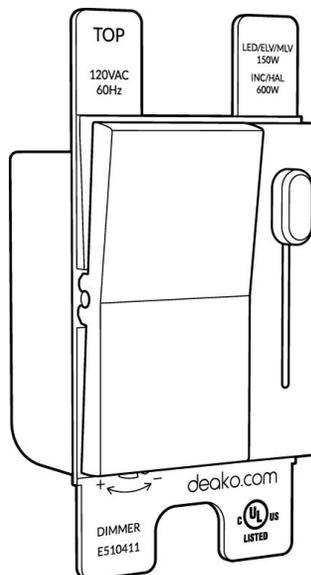

The Simple Dimmer is perfect for homes with bright lights or for those with a love of entertaining. The Deako dimmer works with up to 550-Watt of dimmable load, allowing you to control multiple bulb types on the same circuit. It is designed to control a broad range of dimmable bulbs. The Deako dimmer features a standard paddle switch to turn your lights off or on returning the lights to your favorite level and a physical slider to control the brightness allowing you to adjust the lights quickly.

Features

- Easily upgradable
- Ability to trim switch with physical control
- Can be used in single-pole or 3-way applications, where lights are controlled from one or two locations
- Screwless faceplate
- California Title 24 compliant

Applications

- Great for dining, family rooms, bright hallways and bedrooms

SKU

DS-SD3N-WHNL-UCV

Specifications

Simple Dimmer

Dimensions (H x W x D)	1.77" X 1.70" X 3.80"
Weight	3.7 oz
Compatibility	Single pole, 3-way, and 4-way circuits*
	Deako Faceplate DS-FP series
	Deako Backplate DS-BP series
Supported Currents & Load Types	Incandescent/halogen 550W
	LED/ELV 240W
Maximum Dimmable Load	550W
Regulatory Approvals	cULus Listed (UL1472)
Environment	Indoor use only
Operating temperature range	0°C to 40°C (32°F to 104°F)
Color	White
Warranty	1-year
Vertical Markets	Residential
	Multiple dwellings
	Hospitality / lodging

Also Available in the Deako Switch Family

- Simple Ceiling Fan Controller
- Simple Motion Switch
- Smart Switch
- Smart Dimmer
- Smart Scene Controller Switch
- Smart Scene Controller Dimmer
- Smart Plug

**For 3-way and 4-way circuits, 1 simple dimmer is required and 1 3-Way & 4-Way Simple Rocker Switch is required for each other switch in the circuit*


Date	Notes
Job location	
Approved by	
Job no. / type	

SKU

DS-SM1N-WHWH-UCX

Simple Motion Switch

Occupancy motion sensor light switch, pir infrared motion activated wall switch

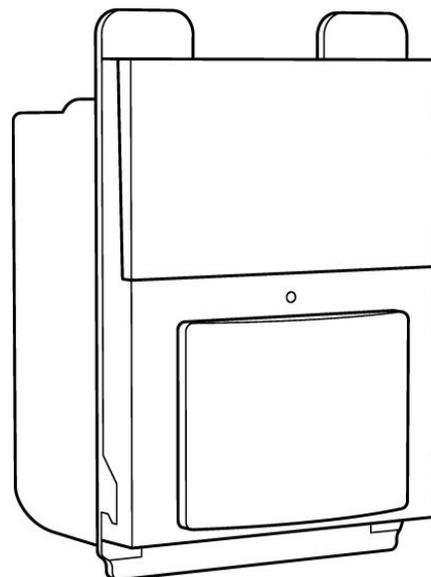

This sensor is a simple way to save energy and add easy automation to any room of your home, turning lights on when you enter the room and off at after a set amount of time. You can install one sensor in the laundry room and one in the bathroom for total convenience and energy savings. The sensor works with any bulb type, including CFL and LED.

Features

- Automatically turn the lights on when you enter the room and off when you leave
- In Occupancy mode, the light will turn on automatically when you enter the room; the light will then turn off automatically after no motion is detected for a set amount of time (10 or 20 minutes)
- In Vacancy mode, the light is turned on manually (by pressing the switch) but turns off automatically after no motion is detected for a set amount of time (10 or 20 minutes)
- The light can be turned on or off manually by pressing the main button on the switch
- The switch has two automatic timer settings: 10 and 20 minutes
- Single-pole only; great for small rooms like kitchens, laundry rooms and closets
- California Title 24 compliant

Applications

- Pull your car into a lit garage
- Enter any room without fumbling with lights, like the pantry when your arms are full of groceries
- Leave the house with confidence knowing the kids' lights are off
- Ditch the frustration of coming home to the bathroom fan still on
- Move through a well-lit home without touching a light switch
- Reduce energy consumption with simple automation

SKU

DS-SM1N-WHWH-UCX

Specifications

Simple Motion Switch

Dimensions (H x W x D)	1.77" x 1.70" x 2.80"
Weight	2.6 oz
Compatibility	Single pole circuits
	Deako Faceplate DS-FP series
	Deako Backplate DS-BP series
	Neutral wire required
Supported Currents & Load Types	Incandescent / halogen / electronic low voltage / magnetic low voltage 800W
	LED/ELV 600W
Regulatory Approvals	cULus Listed (UL773A)
Environment	Indoor use only
Operating temperature range	0°C to 40°C (32°F to 104°F)
Color	White
Warranty	1-year
Vertical Markets	Residential
	Multiple dwellings
	Hospitality / lodging

Also Available in the Deako Switch Family

- Simple Ceiling Fan Controller
- Simple Dimmer
- Smart Switch
- Smart Dimmer
- Smart Scene Controller Switch
- Smart Scene Controller Dimmer
- Smart Plug


Date	Notes
Job location	
Approved by	
Job no. / type	

SKU

DS-SF1N-WHNL-UCX

Simple Ceiling Fan Controller

Quiet fan speed controller

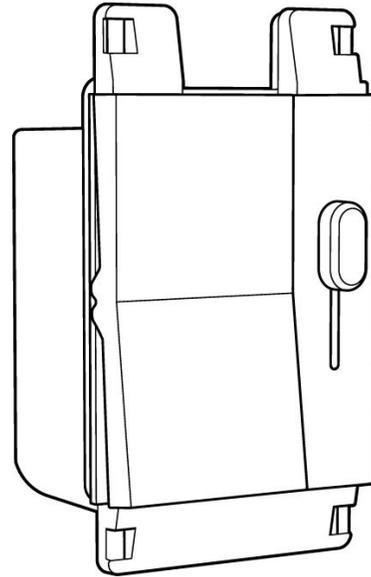

The new Deako fan speed controls enable quiet fan control at any setting. Designed for Single Pole installations, the new fan speed controller is the ideal solutions to upgrade from a standard fan switch offering your homeowners the comfort & convenience and more control capabilities.

Features

- Eliminate need for pull chains
- Combine standard toggle "ON/OFF" switch functionality with a smooth slide for selection of low, medium or high fan speeds.
- Slide up to on/increase, down to decrease
- Use the rocker switch to turn the fan off and on and return to the last speed setting.
- Use only one (1) Fan Speed Control per load.

Applications

- Quiet 1.5-amp fan speed controls are ideal for home offices, bedrooms and any area where ceiling fan noise could become distracting
- For use with multi-speed ceiling fans

SKU

DS-SF1N-WHNL-UCX

Specifications

Simple Ceiling Fan Controller

Dimensions (H x W x D)	1.77" x 1.6" x 3.1"
Weight	2.4 oz
Compatibility	Single pole circuits
	Deako Faceplate DS-FP series
	Deako Backplate DS-BP series
	Neutral wire required
Supported Currents & Load Types	15A general use
Regulatory Approvals	cULus Listed (UL1917)
Environment	Indoor use only
Operating temperature range	0°C to 40°C (32°F to 104°F)
Color	White
Warranty	1-year
Vertical Markets	Residential
	Multiple dwellings
	Hospitality / lodging

Also Available in the Deako Switch Family

- Simple Motion Switch
- Simple Dimmer
- Smart Switch
- Smart Dimmer
- Smart Scene Controller Switch
- Smart Scene Controller Dimmer
- Smart Plug


Date	Notes
Job location	
Approved by	
Job no. / type	

SKU

DS-CSMM-WHMC-UCX

Smart Switch

Control from anywhere

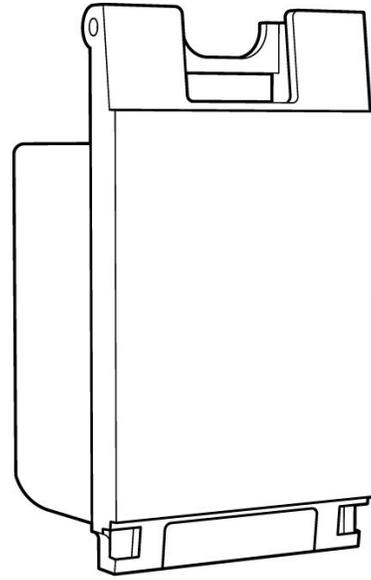

With a clean and simple design, the Deako Smart Switch looks great in any home.

Place in your entry and program the switch to turn on any other Deako smart device in your home so you don't have to feel your way through the dark. Or use the switch to control your exterior lights and easily set schedules to have them turn off and on automatically.

Features

- Control from anywhere
- Programmable with Deako App for Android and iOS
- Customizable long press action
- Set timers
- Schedule your lights
- Create scenes and zones
- For lights controlled by 1 or more locations (*single-pole, 3-way, and 4-way compatible*)

Applications

- Automate your daily routine
- Control multiple devices
- Set up mood lighting for dinners, movie night or parties

SKU

DS-CSMM-WHMC-UCX

Specifications

Smart Switch

Dimensions (H x W x D)	1.77" X 1.70" X 3.26"
Weight	2.5 oz
Compatibility	Single pole, 3-way or 4-way circuits
	Deako Faceplate DS-FP series
	Deako Backplate DS-BP series
	Neutral wire required
Supported Currents & Load Types	11A general purpose
	½ HP motor
Regulatory Approvals	cULus Listed (UL60730)
Environment	Indoor use only
Operating temperature range	0°C to 40°C (32°F to 104°F)
Color	White
Warranty	1-year
Vertical Markets	Residential
	Multiple dwellings
	Hospitality / lodging

Also Available in the Deako Switch Family


- Simple Ceiling Fan Controller
- Simple Motion Switch
- Simple Dimmer
- Smart Dimmer
- Smart Scene Controller Switch
- Smart Scene Controller Dimmer
- Smart Plug

Date	Notes
Job location	
Approved by	
Job no. / type	

SKUs
DS-CD series

Smart Dimmers

Smart dimmer family

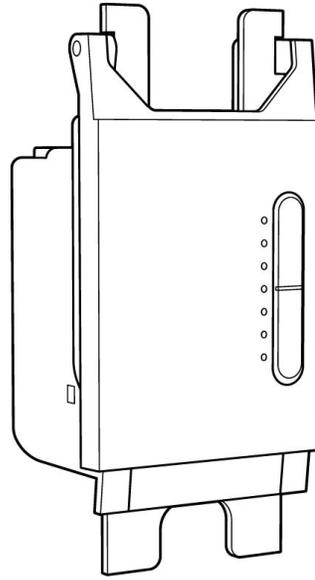

All Deako Smart Dimmers are a great addition to any home. Control the ambiance of your dining room or TV room, use in bathrooms to avoid blinding yourself with bright vanities, or in bedrooms to help ease into sleep. Pair your Smart Dimmer with the free Deako mobile app to create schedules, timers, and more.

Features

- Rocker-style dimming with 7 LED indicators of dim level
- Adjustable trim through the Deako App for Android and iOS
- Programmable with Deako App for Android and iOS
- California Title 24 compliant

Single-Pole Smart Dimmer

Designed to be used in situations where one switch controls one light.

Master Smart Dimmer

Designed to be used alongside one or more Remote Smart Dimmers in situations where two or more switches control the same light.

Remote Smart Dimmer

Designed to be used alongside a Master Smart Dimmer in situations where two or more switches control the same light.

SKUs
DS-CD series

Specifications

Smart Dimmer Family

	Master Smart Dimmer	Remote Smart Dimmer	Single Pole Smart Dimmer
SKU	DS-CD3M-WHMC-UCV	DS-CDRM-WHMC-UCV	DS-CD1M-WHMC-UCV
Dimensions (H x W x D)	1.77" X 1.70" X 3.80"		
Weight	3.7 oz		
Compatibility	Single pole, 3-way or 4-way circuits*	3-way or 4-way circuits*	Single pole circuits
	Deako Faceplate DS-FP series		
	Deako Backplate DS-BP series		
	Neutral wire required		
Supported Currents & Load Types	Incandescent / halogen 550W		
	LED/ELV 240W		
Maximum dimmable load	300W		
Regulatory Approvals	cULus Listed (UL1472)		
Environment	Indoor use only		
Operating temperature range	0°C to 40°C (32°F to 104°F)		
Color	White		
Warranty	1-year		
Vertical Markets	Residential		
	Multiple dwellings		
	Hospitality / lodging		

*For 3-way and 4-way circuits, 1 Master Smart Dimmer is required and 1 Remote Smart Dimmer is required for each other switch in the circuit

SKUs
DS-CD series

Also Available in the Deako Switch Family

- Simple Ceiling Fan Controller
- Simple Motion Switch
- Simple Dimmer
- Smart Switch
- Smart Scene Controller Switch
- Smart Scene Controller Dimmer
- Smart Plug

Date	Notes
Job location	
Approved by	
Job no. / type	


SKU

DS-CSMB-WHWH-UCX

Smart Scene Controller Switch

Smart home automation scene controller

Create scenes to set the mood, control lighting in entire areas of your home with zones, and timers.

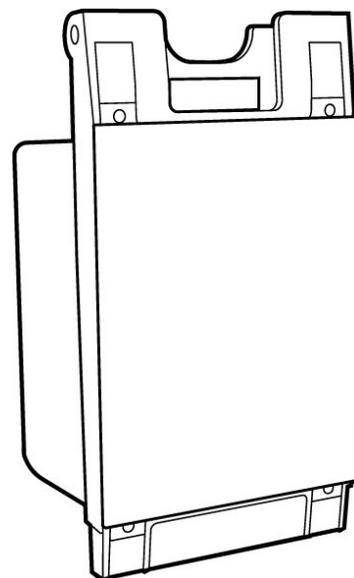

Features

- Control up to 3 scenes directly from any switch
- Integrated with Amazon Alexa or Google Home
- App control with Deako app available for Android and iOS
- Compatible with Single Pole, 3-Way, and 4-Way Configurations
- Bluetooth® Mesh Network
- SmartThings compatible

Applications

- Set the lighting for an entire room or home with a single touch or voice command.
- Turn lights on, off or dim automatically any day or time of the week.
- Put your lights on a schedule while traveling to keep your home safe, or just always arrive home to a well lit up house.
- Set your lights to turn off automatically from 1 minute to 12 hours. Save electricity on bathroom fans or spaces that aren't frequently used.
- Ideal for turning on/off lights in kitchens, living rooms, bedrooms, and outside lights

SKU

DS-CSMB-WHWH-UCX

Specifications

Smart Scene Controller Switch

Dimensions (H x W x D)	1.77" X 1.70" X 3.26"
Weight	2.7 oz
Compatibility	Single pole, 3-way or 4-way circuits
	Deako Faceplate DS-FP series
	Deako Backplate DS-BP series
	Neutral wire required
Supported Currents & Load Types	11A general purpose
	½ HP motor
Regulatory Approvals	cULus Listed (UL244A)
Environment	Indoor use only
Operating temperature range	0°C to 40°C (32°F to 104°F)
Color	White
Warranty	1-year
Vertical Markets	Residential
	Multiple dwellings
	Hospitality / lodging

Also Available in the Deako Switch Family

- Simple Ceiling Fan Controller
- Simple Motion Switch
- Simple Dimmer
- Smart Switch
- Smart Dimmer
- Smart Scene Controller Dimmer
- Smart Plug


Date	Notes
Job location	
Approved by	
Job no. / type	

SKU

DS-CDMB-WHWH-UCX

Smart Scene Controller Dimmer

A touchscreen smart dimmer

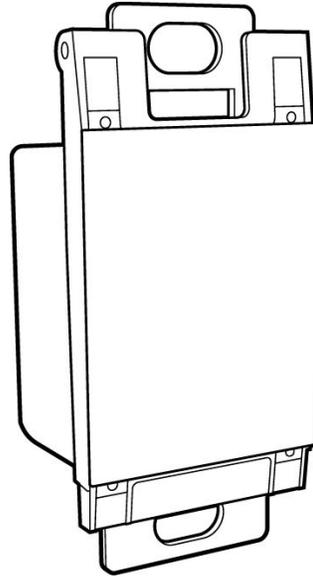

With the Deako Smart Scene Controller Dimmer, you'll enjoy the same personalization features as the Deako Smart Switch like schedules, timers, and scenes with the added ability to dim your lights. Each switch can be programmed with three scenes and features a touch screen sliding bar for dimmer control.

Features

- Two products in one, a 3 scene controller and a 550W dimmer
- Touch-activated slider to dim lights
- Scene controller - Control multiple lights from any switch
- Voice control with Amazon Alexa and Google Assistant
- Bluetooth® Mesh Network - Control any switch from anywhere in your home
- Works with SmartThings

Applications

- Group lights together and control up to 3 scenes from the switch
- Turn lights on, off or dim automatically any day or time of the week.
- Put your lights on a schedule while traveling to keep your home safe, or just always arrive home to a well lit up house.
- Ideal for TV and theater rooms
- Set up difference lighting scenes for different times of the day

SKU

DS-CDMB-WHWH-UCX

Specifications

Smart Scene Controller Dimmer

Dimensions (H x W x D)	1.77" X 1.70" X 3.80"
Weight	3.7 oz
Compatibility	Single pole, 3-way, and 4-way circuits*
	Amazon Alexa & Google Assistant
	Smart Things
	Neutral wire required
Supported Currents & Load Types	Incandescent/Halogen 550W
	LED/ELV 240W
Regulatory Approvals	cULus Listed (UL244A)
Environment	Indoor use only
Operating temperature range	0°C to 40°C (32°F to 104°F)
Color	White
Warranty	1-year
Vertical Markets	Residential
	Multiple dwellings
	Hospitality / lodging

Also Available in the Deako Switch Family

- Simple Ceiling Fan Controller
- Simple Motion Switch
- Simple Dimmer
- Smart Switch
- Smart Dimmer
- Smart Scene Controller Switch
- Smart Plug

**For 3-way and 4-way circuits, 1 Smart Scene Controller Dimmer is required and 1 Smart Scene Controller Switch is required for each other switch in the circuit*


Date	Notes
Job location	
Approved by	
Job no. / type	

SKU

DS-CP1M-WHMC-UCX

Smart Plug

Control from anywhere - Turn lights, fans, and appliances on or off automatically

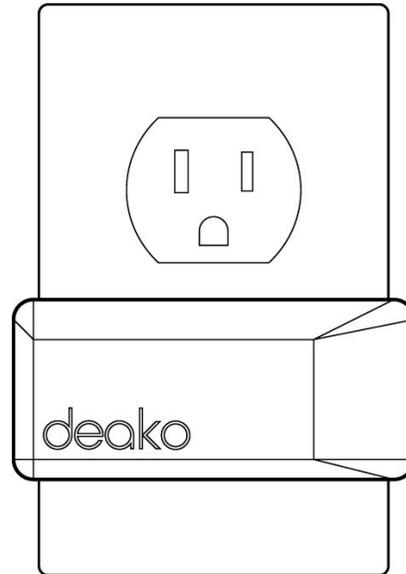

Conveniently control your floor, table lamps and small appliances with the Deako Smart Plug. Control your lights from anywhere in the home.

Features

- Control your outlet from anywhere
- Turn electronics on and off anywhere with your smartphone using the Deako app, whether you are at home, in the office or on vacation
- Using the Deako app and your smart plug you can: Turn lamps and appliances on and off, Schedule, Add a countdown timer, set for dusk to dawn, or create scenes, or add zones
- No wiring necessary - Plugs into Standard 120V outlet
- Conserve energy by scheduling your smart plug to turn on or off automatically
- Leaves second outlet free for use
- Compatible with Amazon Alexa, Google Assistant, the Deako App and SmartThings
- Handy side plug receiver fits easily in tight spaces and behind furniture

Applications

- Control lights, fans, humidifiers, air conditioner, or any other small appliances
- Works with most of household appliances; ideal for indoor lighting fixtures, Christmas tree lights, lamps, hard-to-reach outlets, and other electrical devices

SKU

DS-CP1M-WHMC-UCX

Specifications

Smart Plug

Dimensions (H x W x D)	3.16" x 1.5" x 1.4"
Weight	3.3 oz
Compatibility	For use with 110/120V compatible sockets
Input voltage	120V 15A 60Hz
Supported Currents & Load Types	Max output 120V
	15A general purpose
	½ HP motor
Regulatory Approvals	cULus Listed (UL773A)
Environment	Indoor use only
Operating temperature range	0°C to 40°C (32°F to 104°F)
Color	White
Warranty	1-year
Vertical Markets	Residential
	Multiple dwellings
	Hospitality / lodging

Also Available in the Deako Switch Family


- Simple Ceiling Fan Controller
- Simple Motion Switch
- Simple Dimmer
- Smart Switch
- Smart Dimmer
- Smart Scene Controller Switch
- Smart Scene Controller Dimmer

Date	Notes
Job location	
Approved by	
Job no. / type	

Series
DS-FP

Faceplates

For Deako Switches

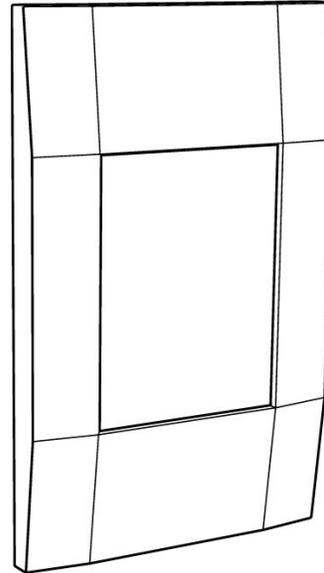

Deako screwless Faceplates are made with quality materials, beautiful design and durability in mind. They add contemporary styling to any residential commercial, institutional or industrial setting, Deako Faceplates look great anywhere. Available in various sizes for both single-gang and multi-gang applications.

Features

- Extremely durable faceplates are almost impossible to break
- Sleek, Sleek, modern design enhances any room
- Deako Faceplates snap onto any Deako Backplate, no screws required
- Fits standard junction box

Applications

- Available in various sizes for both single-gang and multi-gang applications

Series

DS-FP

Specifications

Faceplates

Standard Deako Faceplates

	1-Gang Faceplate	2-Gang Faceplate	3-Gang Faceplate	4-Gang Faceplate
SKU	DS-FP1Y-WHWH-UCX	DS-FP2Y-WHWH-UCX	DS-FP3Y-WHWH-UCX	DS-FP4Y-WHWH-UCX
Dimensions (H x W x D)	4.75" x 3" x .39"	4.75" x 4.82" x .39"	4.75" x 6.64" x .39"	4.75" x 8.45" x .39"
Weight	0.56 oz	0.75 oz	1 oz	1.3 oz
Backplate compatibility / SKU	1-Gang Backplate	2-Gang Backplate	3-Gang Backplate	4-Gang Backplate
	(Quick Wire) DS-BP1Q-WHNL-UCX	(Quick Wire) DS-BP2Q-WHNL-UCX	(Quick Wire) DS-BP3Q-WHNL-UCX	(Quick Wire) DS-BP4Q-WHNL-UCX
	(Wired) DS-BP1X-WHNL-UCX	(Wired) DS-BP2X-WHNL-UCX	(Wired) DS-BP3X-WHNL-UCX	(Wired) DS-BP4X-WHNL-UCX


Deako Faceplates with Outlet

	2-Gang Faceplate with Outlet	3-Gang Faceplate with Outlet
SKU	DS-FP2Y-WHWH-UCD	DS-FP3Y-WHWH-UCD
Dimensions (H x W x D)	4.75" x 4.82" x .39"	4.75" x 6.64" x .39"
Weight	1 oz	1.4 oz
Faceplate compatibility / SKU	2-Gang Backplate with Outlet	3-Gang Backplate with Outlet
	(Wired, Outlet Left) DS-BP2X-WHNL-UCL	(Wired, Outlet Left) DS-BP3X-WHNL-UCL
	(Wired, Outlet Right) DS-BP2X-WHNL-UCR	(Wired, Outlet Right) DS-BP3X-WHNL-UCR


Series
DS-FP

Specifications


Faceplates




1-Gang




2-Gang




3-Gang

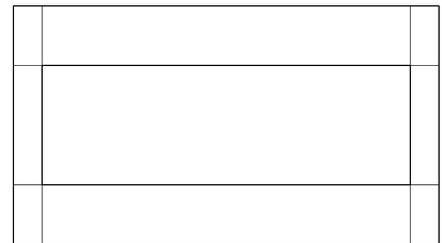

4-Gang




1-Gang with Outlet



2-Gang with Outlet

Faceplates with outlet are reversible and can be used for outlets on the left and the right.

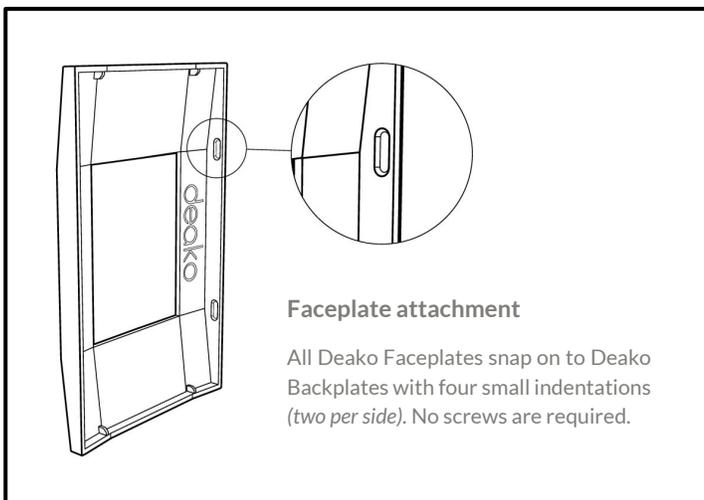

Series
DS-FP

Specifications

Faceplates

Environment	Indoor use only
Operating temperature range	0°C to 40°C (32°F to 104°F)
Color	White
Warranty	1-year
Vertical Markets	Residential
	Multiple dwellings
	Hospitality / lodging

Date	Notes
Job location	
Approved by	
Job no. / type	