

## Features

- Acts as an auxiliary control for DTV Mode® two-outlet digital showering system
- Provides simple on/off actuation of shower outlets
- Sleek, minimalist design

## Installation

- Wall-mount
- Intended for outside of showering space




## Codes/Standards

UL 1951  
CSA C22.2 No. 14  
CSA C22.2 No. 68  
cUL Listed  
UL Listed

## **KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty**

See website for detailed warranty information.

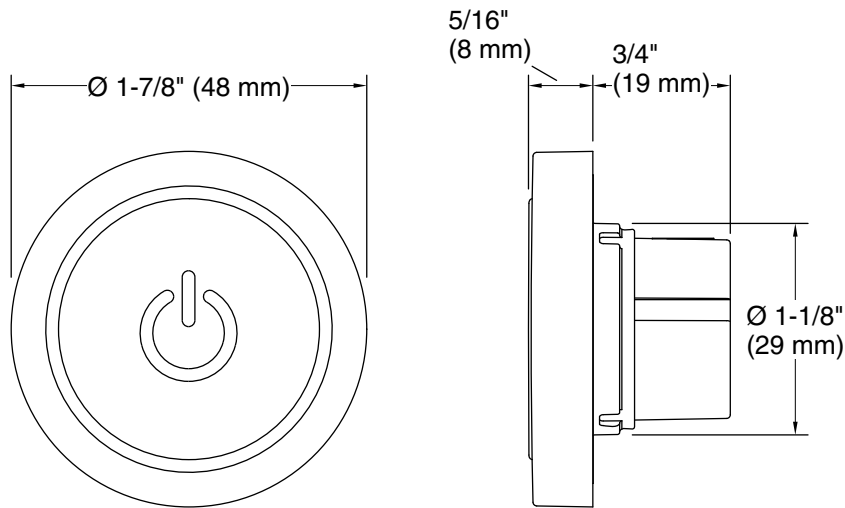

## Technical Information

All product dimensions are nominal.

### Spout:

Max. Ambient temp: 104°F (40°C)  
Min. Operating temp: 86°F (30°C)  
Max. Operating temp: 120°F (48.9°C)  
Max. Relative humidity condensing: 100%

## Notes

Install this product according to the installation instructions.