



SECTION B-B

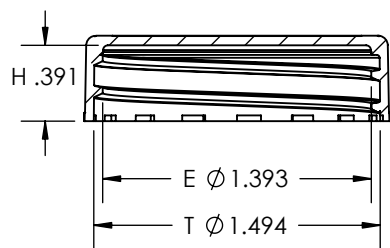

SECTION A-A

6 THREADS PER INCH
 .167 LEAD 1 1/2 TURNS



144 RIBS
 EQUALLY SPACED

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:


DWG31212

DESCRIPTION:

38-400 White PP Matte Top Ribbed Sides Cap with F217 Seal

TECHNICAL DATA SHEET

F- 217

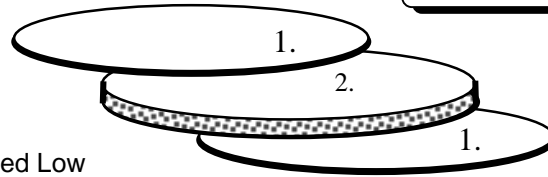

Description: Three –ply co-extruded material; Foamed Low Density Polyethylene Core (2.) Between Two Solid Layers Of Low Density Polyethylene (1.).

SPECIFICATIONS


Thickness			Available Web Width		
Minimum In (mm)	Maximum In (mm)	Deviation In (mm)	Minimum In (mm)	Maximum In (mm)	Deviation In (mm)
0.020 (0.51)	0.060 (1.52)	+/-0.005 (0.127)	1.0 (25.4)	25.0 (635.0)	+/-1/16 (1.6)
0.065 (1.65)	0.090 (2.29)	+/-0.007 (0.178)	1.0 (25.4)	9.00 (228.6)	+/-1/16 (1.6)
0.095 (2.41)	0.125 (3.18)	+/-0.010 (0.254)	1.0 (25.4)	9.00 (228.6)	+/-1/16 (1.6)

Density	Deviation
25 lbs/ft ³	+/-2 lbs/ft ³

Code of Federal Regulations Compliance: Complies to the following CFR’s

- 21CFR177.1520 Olefin polymers.
- 21CFR177.1210 Closures with sealing gaskets for food containers.
- 21CFR178.2010 Antioxidants and or stabilizers for polymers.
- 21CFR175.300 Resinous and polymeric coatings.

FDA Status: The component materials of F-217 are listed under DMF 2434.

DISTRIBUTED BY: 	REF NO.: DWG31212
DESCRIPTION: 38-400 White PP Matte Top Ribbed Sides Cap with F217 Seal	

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.