

# 5MP HD Fixed Eyeball Network Camera with NightLight

IP5T-NL



### **Key Features**

















- High quality image with 5MP, 1/2.7"CMOS sensor
- 5MP (2880\*1620)@ 25fps; 4MP (2560\*1440)@ 25fps; 3MP (2304\*1296) @25fps; 2MP (1920\*1080) @30/25fps
- Ultra 265, H.265, H.264, MJPEG
- NightLight technology ensures 24-hour full-color images
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic
- Supports 265 G Micro SD card
- IP67 protection
- Supports PoE power suply



# **Specifications**


	IP5T-NL							
Camera	1 2 2 1 1 1 2							
Sensor	1/2.7", 5.0 megapixel, progressive scan, CMOS							
Lens	2.8mm@F1.0							
	Lens (mm)	Detect (m)		Observe (m)	Recog	nize (m)	Identify (m)	
DORI Distance	2.8	63.0		25.2	12.6		6.3	
Angle of view(H)	102.0°							
Angle of View (V)	53.4°							
Angle of View (O)	121.0°							
Adjustment angle	Pan: 3° ~ 360° Tilt: 0° ~ 80° Rotate: 3° ~ 360°				O°			
Shutter	Auto/Manual, 1 ~ 1/100000s							
Minimum Illumination	Colour: 0.001Lux (F1.0, AGC ON)							
S/N	>56dB							
Defog	Digital Defog							
WDR	120dB							
LEDs Number	2							
LED Distance	Up to 30m (98ft)							
Video								
Video Compression	Ultra265, H.265, H.264, MJPEG							
H.264 code profile	Baseline profile, Main profile, High profile							
Frame Rate	Main Stream: 5MP (2880*1620), Max 25fps; 4MP (2560*1440), Max 25fps;3MP (2304*1296), Max 25fps; 2MP (1920*1080), Max 30fps;  Sub Stream: 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360, Max 30fps; 2CIF (704*288), Max 30fps; CIF (352*288), Max 30fps;  Third Stream: D1 (720*576), Max 30fps; 640*360, Max 30fps; 2CIF (704*288), Max 30fps; CIF (352*288), Max 30fps;							
Video Bit Rate	128 Kbps~16 Mbps							
9:16 Corridor Mode	Supported							
OSD	Up to 8 OSDs							
Privacy Mask	Up to 4 areas							
ROI	Up to 8 areas							
Image								
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2							
Digital noise reduction	2D/3D DNR							
Smart Illumination	Support							
Flip	Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise							
Dewarping	Support							
HLC	Support							
BLC	Support							
Audio								
Audio Compression	G.711							
Suppression	Supported							



# DATASHEET

Sampling Rate	8КНZ			
Storage				
Edge Storage	Micro SD, up to 256GB			
Network Storage	ANR, NAS(NFS)			
Network				
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS			
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API			
Client	EZStation EZView EZLive			
Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below			
	Plug-in free live view: Chorme 57.0+, Firefox 58.0+, Edge 16+, Safari 11+			
Interface				
Built-in Mic	Supported			
Network	1 RJ45 10M/100M Base-TX Ethernet			
Certifications				
Certifications	CE: EN 60950-1 UL: UL60950-1 FCC: FCC Part 15			
General				
Power	DC 12V±25%, PoE (IEEE 802.3af)			
	Power consumption: Max 7.5W			
Dimensions (Ø x H)	Ф110.5 x 94.1mm (Ø4.4" x 3.7")			
Net Weight	0.44kg (0.97lb)			
Material	metal			
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)			
Strorage Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)			
surge protection	2KV			
Ingress Protection	IP67			

#### **Dimensions**

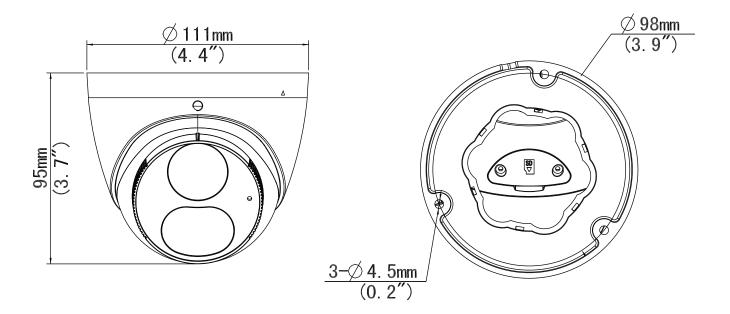

### Warranty

All Illumivue products come with a 3-year limited liability warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified, or disassembled. Warranty items only by authorized resellers. Warranty not eligible for products purchased through non-authorized online sellers.

A product that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 90 days from the date of reshipment to the buyer. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number. The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed. Proof of sale may be required in order to claim warranty.