



EARTH Matte Crackle

Semi-Matte Finish

AVAILABLE COLORS

Navajo White ADEW Fawn ADEF Ash Gray ADEG Morning Sky ADEM



FIELD TILES

UNDULATED



836 3"x6"



831 3"x12"

TEXTURED




836T 3"x6" Textured



831T 3"x12" Textured



101 3"x6" Waves



102 3"x12" Waves

TRIMS

FINISHING EDGES



FE Corner

506 FE 0.5"x6" **512** FE 0.6"x12"

500 FE Corner 6" **501** FE Corner 12"

DECORATIVE ACCESSORIES



502 6"x6" Energy Deco



503 6"x6" Cosmos Deco




206 1"x6" Bar Liner

207 1"x12" Bar Liner

204 1"x6" Quarter Round 205 Beak

FINISHING TOUCHES

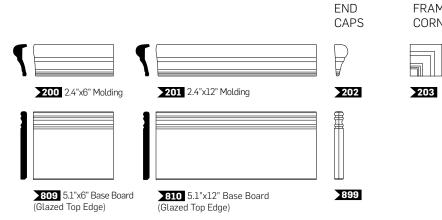



01 02

FRAME

CORNERS







us

EARTH









FIELD TILES				
SIZE	SIZE SPECIFICATIONS	THICKNESS*		
UNDULATED TILE				
3"x6"	2.953"x5.905" (75mm x 150mm)	0.366" (9.3mm)		
3"x12"	2.953"x11.811" (75mm x 300mm)	0.366" (9.3mm)		
TEXTURED TILE				
3"x6" Textured	2.953"x5.905" (75mm x 150mm)	0.366" (9.3mm)		
3"x12" Textured	2.953"x11.811" (75mm x 300mm)	0.366" (9.3mm)		
3"x6" Waves	2.953"x5.905" (75mm x 150mm)	0.366" (9.3mm)		
3"x12" Waves	2.953"x11.811" (75mm x 300mm)	0.366" (9.3mm)		

DECORATIVE ACCESORIES & FINISHING TOUCHES				
Bar Liner 1"x6"	0.984"x5.905" (25mm x 150mm)	0.669" (17mm)		
Bar Liner 1"x12"	0.984"x11.771" (25mm x 299mm)	0.669" (17mm)		
Quarter Round 1"x6"	0.905"x5.827" (23mm x 148mm)	0.394" (10mm)		
Molding 2.4"x6"	2.401"x5.827" (61mm x 148mm)	1.102" (28mm)		
Molding 2.4"x12"	2.401"x11.771" (61mm x 299mm)	1.102" (28mm)		
Base Board (Glazed Top Edge) 5.1"x6"	5.157"x5.827" (131mm x 148mm)	0.512" (13mm)		
Base Board (Glazed Top Edge) 5.1"x12"	5.118"x11.811" (130mm x 300mm)	0.512" (13mm)		

^{*}Thickness is understood as the higest point of the tile.

APPLICATIONS					
	SUITABLE RES	SIDENTIAL	SUITABLE COMMERCIAL		
Bathroom Walls*	YES		YES		
Shower Walls*	YES		YES		
Kitchen Walls*	YES		YES		
Countertops	NO		NO		
Fireplace Surrounds*	YES		YES		
Outdoor Cooking / Bar Spaces*	YES		YES		
Pool Waterlines / Water Fountains	NO		NO		
Floors	NO		NO		
	TEST METHOD	ATCM / ICO	DECL!! T		
	1231 11211100	AISMI/ISU	RESULT		
Water Absorption	C-373 / 10		Pass		
Water Absorption Breaking Strength		545-3			
	C-373 / 10	545-3 545-4	Pass		
Breaking Strength	C-373 / 10 C-648 / 10	545-3 545-4 545-14	Pass Pass		
Breaking Strength Chemical Resistance**	C-373 / 10 C-648 / 10 C-651 / 109	545-3 545-4 545-14 545-2	Pass Pass Resistant		
Breaking Strength Chemical Resistance** Facial Dimensions	C-373 / 10 C-648 / 10 C-651 / 108 C-499 / 10	545-3 545-4 545-14 545-2	Pass Pass Resistant Pass		
Breaking Strength Chemical Resistance** Facial Dimensions Range of Thickness	C-373 / 10 C-648 / 10 C-651 / 109 C-499 / 10	545-3 545-4 545-14 545-2 545-2	Pass Pass Resistant Pass Pass		
Breaking Strength Chemical Resistance** Facial Dimensions Range of Thickness	C-373 / 10 C-648 / 10 C-651 / 109 C-499 / 10 C-499 / 10 INSTALL	545-3 545-4 545-14 545-2 545-2	Pass Pass Resistant Pass Pass		
Breaking Strength Chemical Resistance** Facial Dimensions Range of Thickness Warpage	C-373 / 10 C-648 / 10 C-651 / 109 C-499 / 10 C-499 / 10 INSTALL	545-3 545-4 545-14 1545-2 1545-2 1545-2	Pass Pass Resistant Pass Pass Pass		

Routine with a non-abrasive/non-acidic, mild and PH neutral cleaner

SEALING GUIDELINES

Solvent based penetrating sealer suitable for ceramic tiles

CHARACTERISTICS				
Glaze	Crackle with subtle movement			
Surface Sheen	Semi-Matte			
Texture	Slightly Undulated			

^{*}Crackle tiles must be properly sealed. (See SEALING instructions in INSTALLATION & MAINTENANCE guidelines)

05 06

^{**} In order to accomplish this test, the tile must be properly sealed.

Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.



CONTACT US

Corporate Headquarters South East Distribution Center

9450 N.W.12th St. Miami, FL. 33172 Office: 305-513-4633 Fax: 305-513-4634 customerservice@adexusa.com

West Coast Distribution Center 2344 E. Walnut Ave. Fullerton, CA. 92831 Office: 714-773-0197 Fax: 714-773-9352 customerservicewest@adexusa.com

North East Distribution Center 1000 Wall St. W.

Lyndhurst, NJ. 07071 Office: 201-355-8772 Fax: 201-636-2802 customerservicene@adexusa.com







Our company has an environmental management system in place according to the Norm ISO 14001 certified by European Quality Assurance (EQA)