
PVC Coated ST Style Knockout Hub

Catalog Number: PRST4
UPC: 784011207398



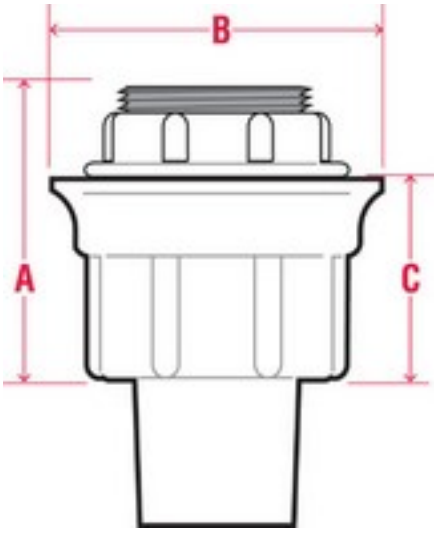

Description

1-1/4 Inch ST Knockout Hub
PVC coated ST knockout hubs are used to terminate conduit runs through the wall of a sheet metal electrical enclosure.

Application

- Used to terminate conduit runs through the wall of a sheet metal electrical enclosure
- Used to terminate conduit runs through the wall of a sheet metal electrical enclosure

Features

- 40 mil gray PVC exterior coating
- 2 mil red urethane interior coating
- Available in 12 trade sizes from 1/2" through 6"
- Sealing sleeves on conduit side of hub
- Molded PVC gasket seals flush with enclosure wall
- O-ring gasket provides additional seal

General

Material:	FERROUS METAL
Exterior Finish:	A nominal .040 inch (40 mil) gray PVC coating
Interior Finish:	A nominal .002 inch (2 mil) red urethane
Seal Type:	O-ring gasket
Grounding Lug:	Available on STG

Dimensions

Dimension A (Inches)	1.69
Dimension B (Inches)	3.25
Dimension C (Inches)	1.03
Max Wall Thickness (Inches)	.25
Nominal Weight (Pounds)	0.4

Technical / Specification Documents

Specification Guide (1995 Master)	*AVAILABLE ON WEBSITE*
Specification Guide (2004 Master)	*AVAILABLE ON WEBSITE*
Installer Certification and Tools	*AVAILABLE ON WEBSITE*
Chemical Resistance Charts	*AVAILABLE ON WEBSITE*
Performance Specifications	*AVAILABLE ON WEBSITE*

Plasti-Bond RedH2OT
PVC Coated Rigid Metal Conduit
1100 US Hwy 271 South, Gilmer, TX 75644
Tel 903.843.5591 | Fax 903.843.5595
customerservice@plastibond.com

PVC Coated ST Style Knockout Hub

Catalog Number: PRST4

UPC: 784011207398

Standards

UL 514B:	E200413
NEC/CEC:	Class I, Division 2
NEC/CEC:	Class II, Division 1 & 2
NEC/CEC:	Class III, Division 1 & 2

Notes

All Screw-tight Hubs are listed for NEMA and UL type enclosures 2, 3, 3R, 4, 4x, 11 and 12

Grounding and Bonding Hubs are listed for NEMA Enclosures 2, 3, 3R, 4 and

1100 US Hwy 271 South, Gilmer, TX 75644
Tel 903.843.5591 | Fax 903.843.5595
customerservice@plastibond.com