






DAYNA TWO LIGHT FLUSH/SEMI-FLUSH CONVERTIBLE PENDANT

77262

General Product Information

 <p>Intertek</p>	 <p>SAVE THESE INSTRUCTIONS!</p>	 <p>STANDARD INSTALLATION</p>	 <p>INDOOR</p>
 <p>NEC COMPLIANT JUNCTION BOX</p>	 <p>TITLE 24 COMPLIANT</p>	 <p>LED</p>	 <p>DRY LOCATION</p>
 <p>PLEASE SEE visualcomfort.com FOR PRODUCT SPECS</p>	 <p>CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!</p>	 <p>BEST PRACTICE: HANDLE FIXTURE WITH GLOVES</p>	
 <p>WARRANTY</p>	 <p>FCC STATEMENT</p>		

Tools Required

 <p>PHILLIPS-HEAD SCREWDRIVER</p>
--

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.

 Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



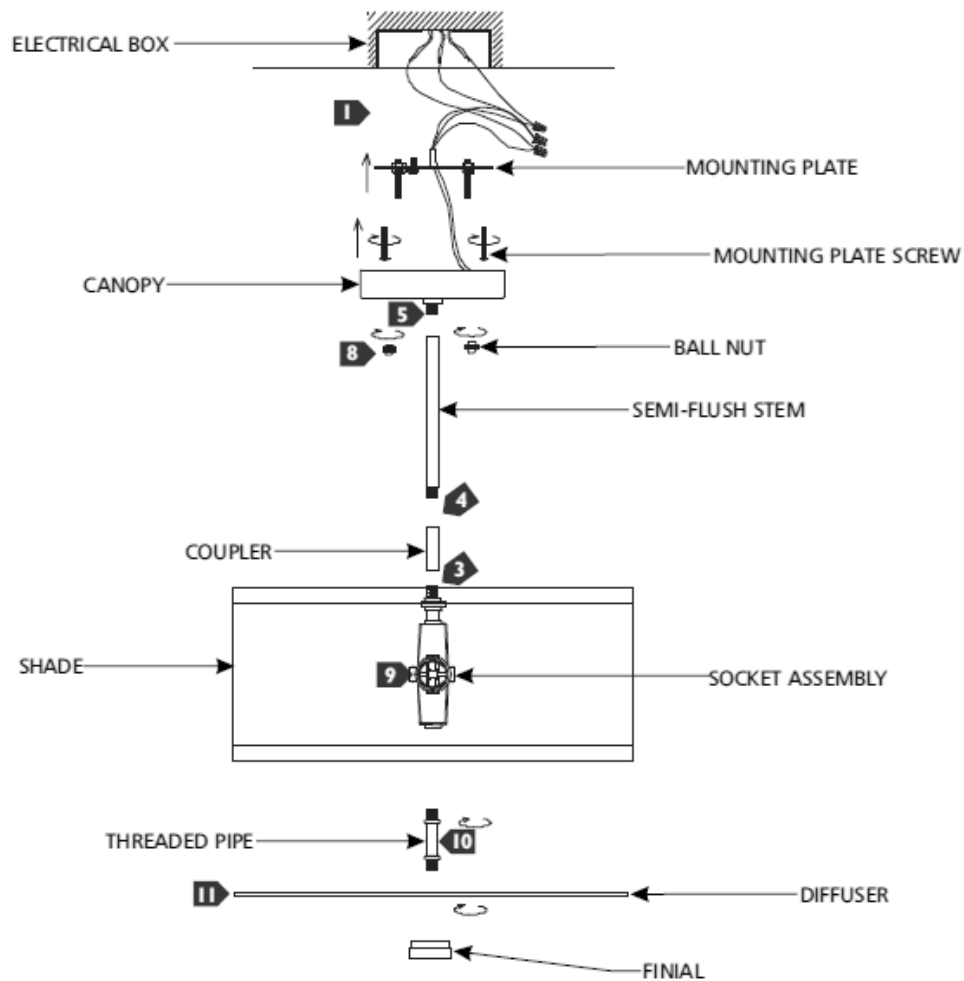

INSTRUCTIONS

I. Preparing the Fixture

1. Secure the mounting plate to the junction box with the mounting screws.
2. Feed the fixture wires through the coupler and screw to fixture tightly.
3. For Semi-Flush mount only: feed the fixture wires through the stem and secure it tightly to the coupler.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) White fixture wire to neutral power line wire
 - b) Black fixture wire to hot power line wire
4. Carefully tuck all the wires in the junction box.

III. Installing the Fixture

1. Align then place the canopy onto the mounting plate studs and secure it with the two ball nuts.
2. Screw the lamps into the socket. Refer to the label on the socket for Max Wattage information.
3. Screw the threaded pipe to the fixture.
4. If applicable, carefully remove the protective film from the diffuser, install the diffuser onto the nipple, and secure it in place with the finial. CAUTION: OVER TIGHTENING MAY CAUSE GLASS BREAKAGE RESULTING IN INJURY.