

620TP Series – Electronic Faucet Trim

For Recess Mounted Control Box and Single Inlet Supply

TECK[®]
COMMERCIAL



Specification: (example)

- Supplied as trim parts only – requires separate order of ELAVT0001RI rough-in to have complete product
 - **Proximity[®] Sensing Technology**
 - Chrome plated gooseneck spout
 - **Battery** (4 "AA" cell) or **Hardwire** (24 VAC)
 - Adjustable sensing range and timeout
 - Serviceable filter screen upstream of the solenoid valve
 - Metal hold-down package
- and... with... (specify battery or hardwire)
with... (add outlet required)
with... (specify finish)
with... (4" and 8" coverplates – specify separately – See Back Page)
with... (transformer required for hardwire models – specify separately – See Back Page)

620TP SERIES



Engineer/Architect Approval

Model Specified:







Approval:

Date:

DESCRIPTION	TRIM PRODUCT NO.				FINISH
Trim Only for Hardwire	620TP33	1	TR		Chrome
Trim Only for Battery Operated	621TP33	1	TR		
Trim Only for Hardwire with Battery Backup	620TP33	1	TR	-BB	
Trim Only for Hardwire	620TP33	1	TR	-SS	Brilliance [®] Stainless
Trim Only for Battery Operated	621TP33	1	TR	-SS	
Trim Only for Hardwire with Battery Backup	620TP33	1	TR	-BB-SS	



Rough-In Product Number ELAVT0001RI – Order separately

SPOUT VARIATION	OUTLET	CONTROL BOX
0 <input type="checkbox"/>	0 <input type="checkbox"/>	0 <input type="checkbox"/>
1 <input type="checkbox"/>	1 Vandal Resistant 2.2 gpm (8.3 L/min.) Laminar Outlet  <input type="checkbox"/>	1 12" S/S Cover, Driver Board, Solenoid for ELAVT0001RI*  <input checked="" type="checkbox"/>
2 <input type="checkbox"/>	2 Vandal Resistant 1.5 gpm (5.7 L/min.) Laminar Outlet  <input type="checkbox"/>	2 <input type="checkbox"/>
3 Single Hole Deckmount Gooseneck Spout  <input checked="" type="checkbox"/>	3 <input type="checkbox"/>	3 <input type="checkbox"/>
4 <input type="checkbox"/>	4 <input type="checkbox"/>	4 <input type="checkbox"/>
5 <input type="checkbox"/>	5 Vandal Resistant 0.5 gpm (1.9 L/min.) Laminar Outlet  <input type="checkbox"/>	5 <input type="checkbox"/>
6 <input type="checkbox"/>	6 Vandal Resistant 1.0 gpm (3.8 L/min.) Laminar Outlet  <input type="checkbox"/>	6 <input type="checkbox"/>
7 <input type="checkbox"/>	7 <input type="checkbox"/>	7 <input type="checkbox"/>
8 <input type="checkbox"/>	8 <input type="checkbox"/>	8 <input type="checkbox"/>
9 <input type="checkbox"/>	9 <input type="checkbox"/>	9 <input type="checkbox"/>

*Mixing valve (order separately). Refer to www.specselect.com for individual models.

Flow Rates are at 60 PSI. Note: Use this page front and back as product submittal sheets.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.



TECK[®]
COMMERCIAL

620TP Series – Electronic Faucet Trim

For Recess Mounted Control Box and Single Inlet Supply



Approvals:

- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
- Indicates compliance to ICC/ANSI A117.1
- Outlet options 2 and 6 are EPA WaterSense listed
- Verified compliant with 0.25% weighted average Pb content regulations

(Contact Delta Representative for State and/or Local Approvals.)

Patented

FLOW RATE vs PRESSURE

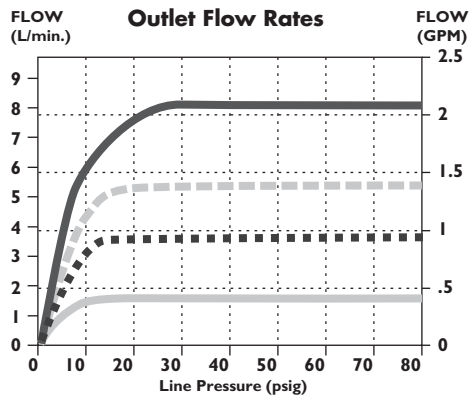

OPERATION:


- Hands free (touchless) operation.
- No visible sensor, the spout is the sensor.
- Water flows when sensing is activated.
- Water flow stops upon de-activation of sensing.
- Adjustable sensing distance factory set to 76 mm (3").
- Low battery audible beep (for battery models only) will activate after faucet shuts off when approximately 1500 cycles remain.
- Adjustable auto shut off feature. Factory set to 45 seconds.
- Metering mode with selectable flow times of 7 seconds to 4 minutes, factory set off.
- Periodic Rinse feature, time adjustable in 6 hour increments up to 2 days. Selectable rinsing lengths from 10 to 180 seconds. Factory set off.

NOTE 1: For optimum performance of this product, we recommend a system pressure between 20 and 80 PSI static. This product will operate up to a maximum of 125 PSI static per ANSI and CSA requirements. However, we do not recommend pressures above 80 PSI. Thermal expansion or leaking pressure reducing valves may require use of expansion tanks or relief valves to ensure your system never exceeds its maximum intended pressure setting.


NOTE 2: Designed for routine 180°F (82°C) disinfection cycles up to 10 minutes.

NOTE 3: Hardwire Proximity models not for use on enamel covered metal sinks.

Note: Measurements may vary ± 6mm (0.25")

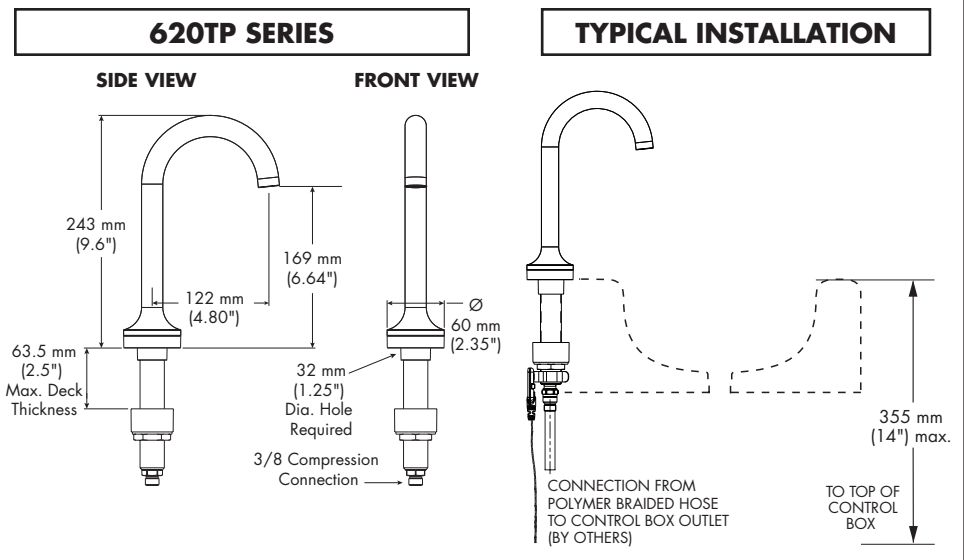

4" & 8" COVERPLATE

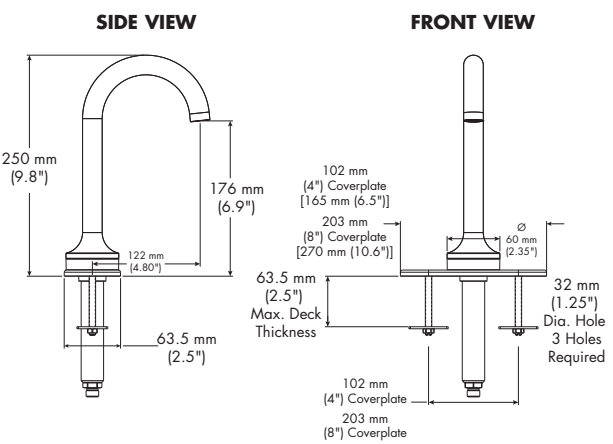

Available Option for Field Conversion

060651A
3 Position Switch
See DSP-ELACC for detailed specification.

HARDWIRE WITH BATTERY BACKUP

Add suffix **"-BB"** to Product Number. See DSP-BB for detailed specification.

Available Optional Coverplates for Field Conversion – Specify separately

PRODUCT NO.	FINISH	DESCRIPTION
061269A	Chrome	4" Coverplate
061269SS	Brilliance [®] Stainless	4" Coverplate
061270A	Chrome	8" Coverplate
061270SS	Brilliance [®] Stainless	8" Coverplate

Cast coverplate with anti-rotation pin for secure public washroom installation

620TP ELECTRONIC FAUCET OPTIONAL ACCESSORIES:

✓	TRANSFORMERS:
✓	060704A 110 to 24VAC Class II 20VA (Up to 5 Electronic Valves)
✓	060771A 110 to 24VAC Class II 40VA (Up to 10 Electronic Valves)
✓	060772A 110 to 24VAC Class II 100VA (Up to 25 Electronic Valves)
✓	CORDS:
✓	061256A 36" Cable Extension

Refer to www.specselect.com for individual models.
Product supplied as shown by solid lines. All items shown by dotted lines supplied by others.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.