

Project *Comments*

Catalog # *Prepared By*

Type *Date*




DESCRIPTION

- Suitable for new construction in residential and commercial applications.
- IC rated. Suitable for direct contact with insulation.
- Use one 120V 13W-27W GU24 lamp (not included).

HOUSING

- Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
- Washington State Energy Code approved to meet restricted airflow requirements.
- Adjustable socket bracket assures proper and consistent lamp positioning.
- 7 1/2" height allows use in 2" x 8" joist construction.

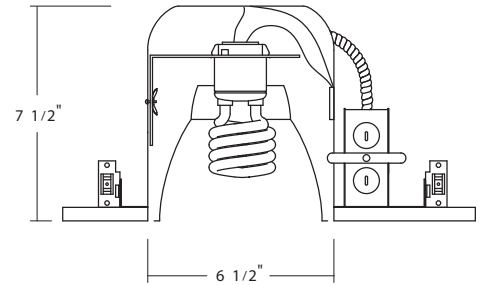


Plaster Frame

- Housing is secured to plaster frame with screws and can be removed for access to junction box.
- Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

- Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
- Supplied with three push-in wire connectors.

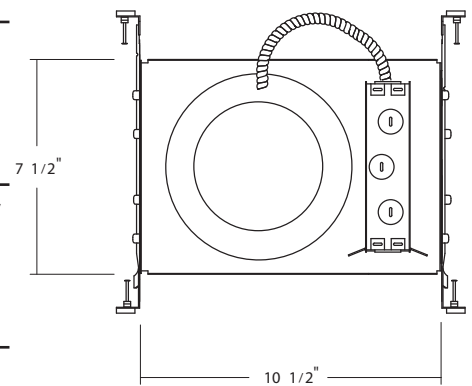

HANGER BARS

- Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist. Four double-headed captive nails provide for ease of installation.
- Bars can be repositioned 90° on plaster frame without tools.
- Bars fit onto T-bar spine for quick alignment and can be permanently secured.
- Score lines allow bars to be shortened without tools to accommodate a 12" joist span.


LISTINGS

- UL listed for direct contact with insulation
- UL damp location
- UL feed-through
- CUL







Order No	Description	Maximum Lamp Rating
	Cone Baffle	27W GU24 OD: 7 1/2" Airtight
17525BK	Black	
17525BZ	Bronze	
17525NK	Nickel	
17525OB	Oil Rubbed Bronze	
17525WH	White (shown)	

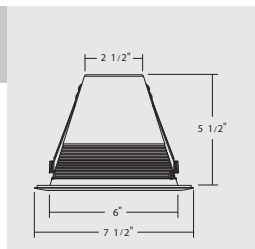


Order No	Description	Maximum Lamp Rating
	Cone Baffle	27W GU24 OD: 7&1/2"
17550ACLP	White	

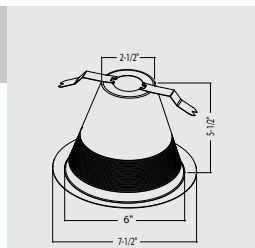


Order No	Description	Maximum Lamp Rating
	Baffle	27W GU24 OD: 8"
17511BZ	Bronze (shown)	
17511NK	Nickel	
17511OB-ABZ	Oil-Rubbed Bronze (Aged Bronze Ring)	
17511OB-OB	Oil-Rubbed Bronze (Oil-Rubbed Bronze Ring)	
17511	White	
17511SP	White - Single Piece	
17511SPBK	Black - Single Piece	

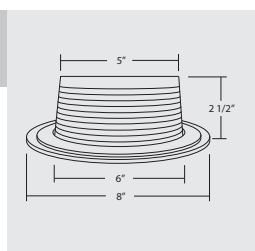

Order No	Description	Maximum Lamp Rating
	Specular	27W GU24 OD: 7"
17515	Clear	

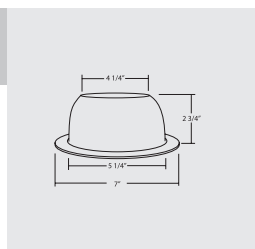


Order No	Description	Maximum Lamp Rating
	Specular Cone	27W GU24 OD: 7"
17518CL	Clear (shown)	
17518WH	White	

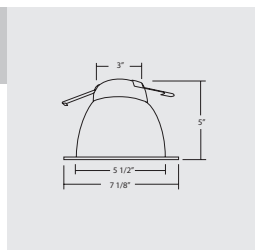



Order No	Description	Maximum Lamp Rating
17519	Regressed Eyeball White Baffle Clear	27W GU24 OD: 7&1/8" Adjustable up to 30°

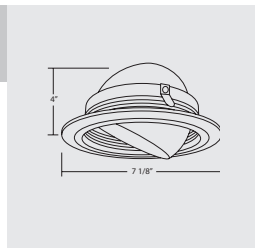

Order No	Description	Maximum Lamp Rating
17505BZ	Lexan Shower Albalite Lens Black Baffle/Clear	27W GU24 OD: 8" Wet Location Rated
17505NK	Brushed Nickel Baffle/Clear	
17505OB	Oil-Rubbed Bronze Baffle/Clear (shown)	
17505WH	White Baffle/Clear <i>Also Available</i>	
17575	White (with plastic trim ring)	

