


Cool and clean, Style II™ offers multiple sizes and a linear mosaic for a contemporary installation perfect for any application.

STYLE II™

Glazed Porcelain




FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR  POOL 

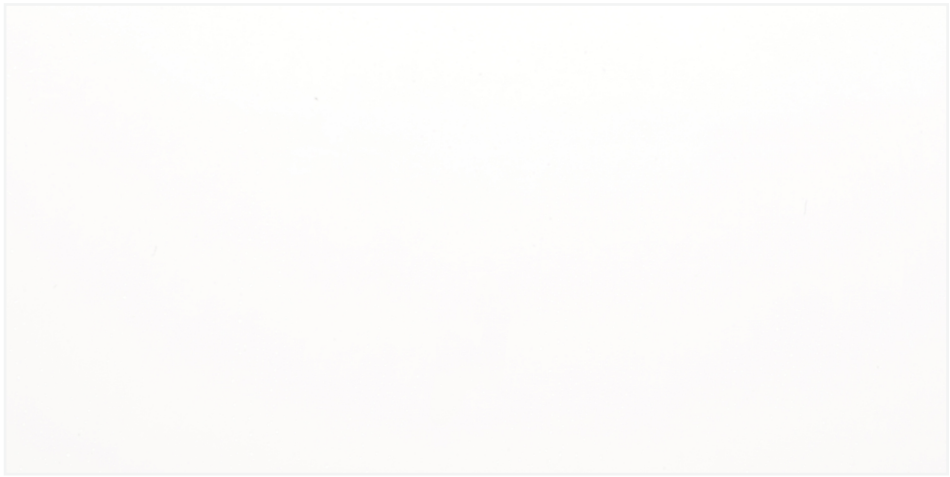

Pure White

Mosaics



Sizes	32" x 32" 31.50" x 31.50"	24" x 24" 23.62" x 23.62"	12" x 24" 11.81" x 23.62"	12" x 12" Mesh	3" x 12" Floor SBN		
Thickness	9.5mm	9.5mm	9.5mm	9.4mm	9.5mm		
Faces	1	1	1	N/A	1		
Finish	Polished	Matte & Polished	Matte & Polished	Matte	Matte & Polished		
Edge	Rectified	Rectified	Rectified	Cut	Cut/Rounded		
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	3/16"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV (Matte) III (Polished)	>400 lbf	Resistant	<0.50%	>0.55 (Matte) <0.42 (Polished)	7 (Matte) 5 (Polished)	V1

Product and Installation Details | ANSI A108.02
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

*For more information visit www.emser.com. Always consult a professional for proper usage and installation.