



Physics

Porcelain Stone[®]


Available Colors

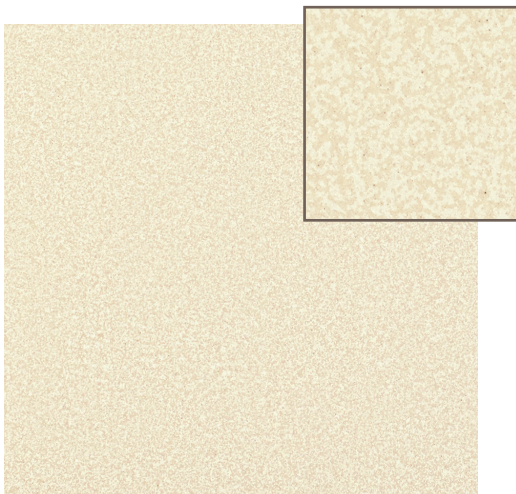


PHY01 ▶ Boson

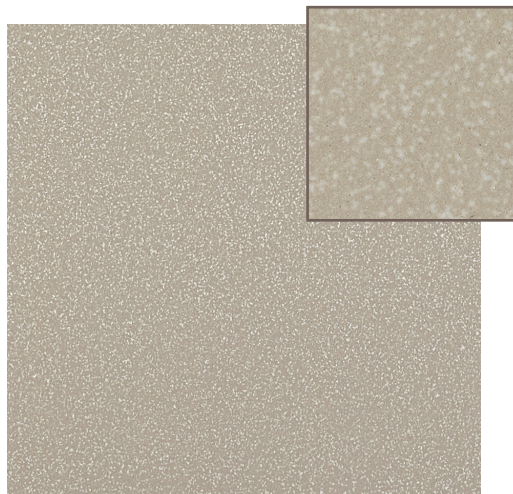


PHY02 ▶ Nucleus

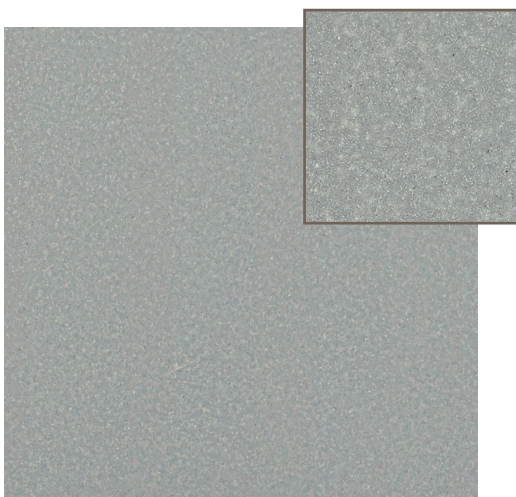

PHY03 ▶ Proton

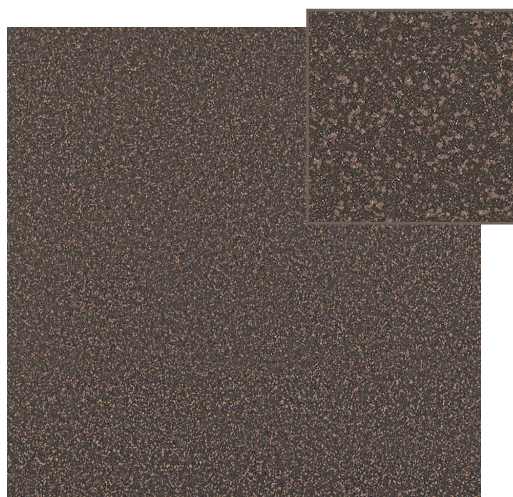

PHY04 ▶ Graviton

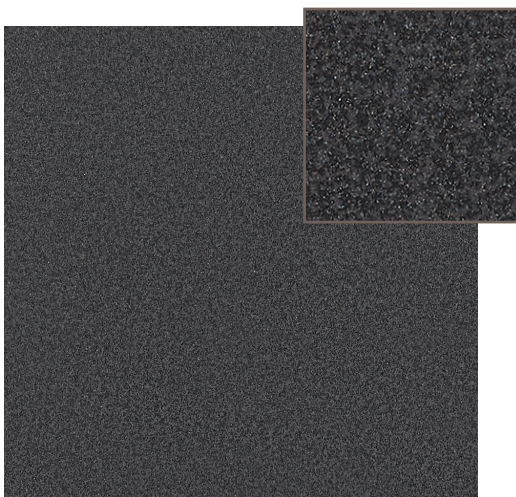

PHY05 ▶ Quark

Features and Benefits

- Physics opens designers to a universe of porcelain in a look that captures the relationship between matter and motion.
- Available in 12x24, 12x12 sizes, 3x3 mosaics, and complementary trim
- Recommended for interior floors, walls, counter tops and exterior walls in both residential and commercial applications
- Complete trim package including mosaics suitable for shower floors
- Competitively priced for exceptional value
- Cross-Sheen finish for easy cleaning
- Made in the USA



Physics

Porcelain Stone[®]

Available Mosaics




PHY01 ▶ Boson 3 x 3 Mosaics



PHY02 ▶ Nucleus 3 x 3 Mosaics



PHY03 ▶ Proton 3 x 3 Mosaics

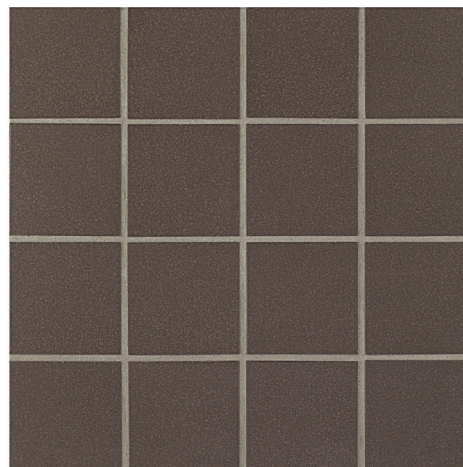

PHY04 ▶ Graviton 3 x 3 Mosaics



PHY05 ▶ Quark 3 x 3 Mosaics



Physics

Porcelain Stone®

Sizes (Shown in PHY04)

12 x 24

12 x 12

3 x 3 Mosaics
UPS Finish
(Mounted on an
12 x 12 sheet.)

Get Planked!

Our Porcelain Stone® products are available in popular plank shapes with no minimum order and quick fulfillment.

See website for more details and sizes.



Crossville® Sample Express

Complimentary Samples are available at CrossvilleInc.com/products/physics/

Samples may also be ordered through customer service by email or phone.

Sample fulfillment & Help Line

Samples@CrossvilleInc.com
1 800 221.9093

Loose Samples for
Architects & Designers

Loose Tile Samples

Sizes may vary depending on product series

Max. of 4 large field tile per order

Replacement Chips for PSS Rack

Max. of 5, 2 x 2 chips per color

Standard Shipping

UPS Ground

Sizes & Finishes

Field Tile

Available in all colors

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
12 x 12	11-3/4 x 11-3/4	5/16	3/16	UPS/PO
12 x 24	11-3/4 x 23-3/4	5/16	3/16	UPS/PO

Crossville recommends a grout joint of 3/16 inch.

Actual measurements stated in inches indicate tile is calibrated (non-rectified).

Actual measurements stated in mm indicate tile is rectified.

Mosaics

Available in all colors

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
3 x 3 Mosaic	11-3/4 x 11-3/4	1/4	3/16	UPS

*Mounted on 12 x 12 sheet

Coordinating Trim

Available in all colors


Nominal (mm)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
4 x 12 Single Bullnose	3-3/4 x 11-3/4	5/16	3/16	UPS/PO
6 x 12 Cove Base	5-7/8 x 11-3/4	5/16	3/16	UPS
1 x 6 Inside Corner	1 x 5-7/8	5/16	3/16	UPS
1 x 6 Outside Corner	1 x 5-7/8	5/16	3/16	UPS



4 x 24 Bullnose



6 x 12 Cove Base



1 x 6 Inside &
Outside Corners

Product Performance


Breaking Strength	>350 lbf	ASTM C648
Bond Strength	>200 psi	ASTM C482
Chemical Resistance (UPS)	Class A	ASTM C650
Chemical Resistance (PO)	Class B	
Frost Resistance	Resistant	ASTM C1026
Water Absorption	<0.20%	ASTM C373
Scratch Hardness	7	Mohs Scale

Wet Dynamic Coefficient of Friction Range

UPS	0.50 - 0.60	AcuTest sm
PO	0.31 - 0.41	AcuTest sm

Shade & Texture Index

Physics has a shade variation of V1.

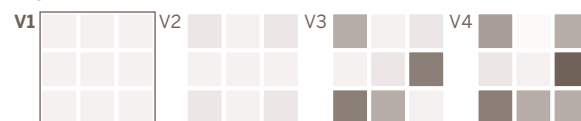

V1 Uniform appearance

V2 Slight Variation

V3 Moderate Variation

V4 Substantial Variation

This porcelain tile product is produced with a V1 variation. Differences among pieces from the same production run are minimal. Inspect the product upon delivery and for best results, blend tile from several cartons during installation.



Physics

Crossville, Inc.

PO Box 1168
Crossville, TN
38557

Phone 931.484.2110
Fax 931.456.2956
E-Mail Crossc@CrossvilleInc.com
Web CrossvilleInc.com

Recommended Use

Physics is recommended for interior floors, walls, counter tops and exterior walls in both residential and commercial applications. **If offset pattern is required for tiles 15 inches or longer, Crossville® recommends an offset of not greater than 33%.** See CrossvilleInc.com for detailed installation instructions.

Polished Tile

For polished tiles, the use of a penetrating type sealer is required prior to grouting. Grouts should be tested to determine if the grout or grout pigment will contaminate the surface of the tile and may require more than one coating of sealer before proceeding to the entire installation.

Environmentally Conscious

Physics contains a minimum of 4% pre-consumer recycled content and is manufactured by Crossville® using processes that recycle nearly 12 million pounds of previously discarded filtrate and fired tile waste. In addition to its own fired waste recycling, Crossville also accepts and recycles reclaimed, previously installed tile through its Tile Take-Back™ Program. For more information, visit CrossvilleInc.com/green.

Care and Maintenance

Regular cleaning is the best way to keep Physics tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth to prevent water spots. No waxes or sealers are needed. More information regarding the care and maintenance of Crossville products is available at CrossvilleInc.com.

Our Warranty

Crossville Inc guarantees that its products will meet or exceed the performance specifications outlined in ANSI A137.1-2012 and in the performance data section of the Crossville, Inc. general product catalog. For complete details check our website at CrossvilleInc.com.

Hydrotec™

Our porcelain tiles are available with Hydrotec™. Crossville's revolutionary invisible coating harnesses the power of light, water, and oxygen to create the best defense against dirt and pollution. Whether indoors or out, floors and walls stay cleaner, providing a superior experience in any space. For complete details check our website at CrossvilleInc.com.



National Accounts

For over 20 years we have been offering Porcelain tile to commercial customers at National Accounts pricing programs with special discounts. The National Accounts department provides materials forecasting, sales support and samples.

Exterior Cladding

Crossville's Porcelain Stone® Exterior Cladding Systems are suitable for virtually any conventional masonry application. When used in conjunction with our exterior cladding systems, Crossville's Porcelain Stone offers clear advantages: decreased construction costs, less site disturbance, low-to-zero maintenance after installation, accelerated construction schedules and greater strength than traditional masonry.

Information listed here is subject to change. Please refer to CrossvilleInc.com for the latest, most accurate information.



PHY01 ▶ Boson 12 x 24 UPS

Trade Organizations



Environmentally Aware

