



TECHNICAL INFORMATION



V2 Slight Variation



Ready Ship



Recommend offset pattern
≤33%




DCOF:
≥ 0.42



Made in USA



COLORS

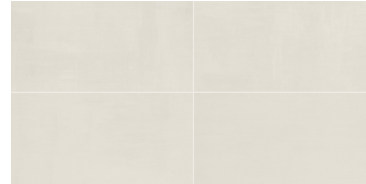

Chalk AOT SS35




Dune AOT SS36



Breeze AOT SS37



Stone AOT SS38

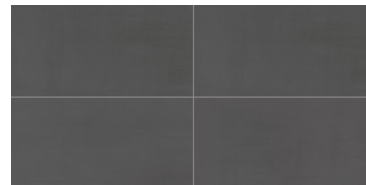

Charcoal AOT SS39

Tiles, Mosaic and Trim*

SIZE	ACTUAL	THICKNESS	FINISH
24" x 24"	23.375" x 23.375"	7.94mm	Matte
12" x 24"	11.625" x 23.375"	7.94mm	Matte
3" x 3" Mosaic	12" x 12" (sheet size)	7.94mm	Matte
3" x 24" Bullnose	3" x 24"		Matte
6" x 12" Cove Base	6" x 12"		Matte
1" x 6" Cove Base Outcorner	1" x 6"		Matte

* Not all sizes are available in all colors and finishes

Application**

		WALL	FLOOR
Interior	Residential	•	•
Interior	Commercial	•	•
Interior	Heavy Commercial		
Exterior	Residential/Commercial		

** These recommendations are not defined by ANSI Standards

Performance Characteristics

Breaking Strength	>275 lbs
Chemical Resistance	Resistant
DCOF	≥0.42
Deep Scratch Resistance - Unglazed	Not Applicable
Frost Resistance	Not Applicable
Mohs Hardness - EN101	8
PEI Rating	Not Applicable
Water Absorption	<0.5%
Certifications	Not Applicable
Shade Variation Code	v2

Please see virginiatile.com for details