

# Mini WALLADesk®

SKU# 64100

Work Surface: 16<sup>7</sup>/<sub>8</sub>" W x 10<sup>5</sup>/<sub>8</sub>" D




## DIMENSIONS


**FOLDED DIMENSIONS:** 17<sup>1</sup>/<sub>4</sub>" W x 13<sup>1</sup>/<sub>2</sub>" H x 2<sup>3</sup>/<sub>4</sub>" D

**DIMENSIONS WITH WORK SURFACE UP:** 17<sup>1</sup>/<sub>4</sub>" W x 11<sup>1</sup>/<sub>2</sub>" H x 12<sup>3</sup>/<sub>4</sub>" D

**WORK SURFACE DIMENSIONS:** 16<sup>7</sup>/<sub>8</sub>" W x 10<sup>5</sup>/<sub>8</sub>" D

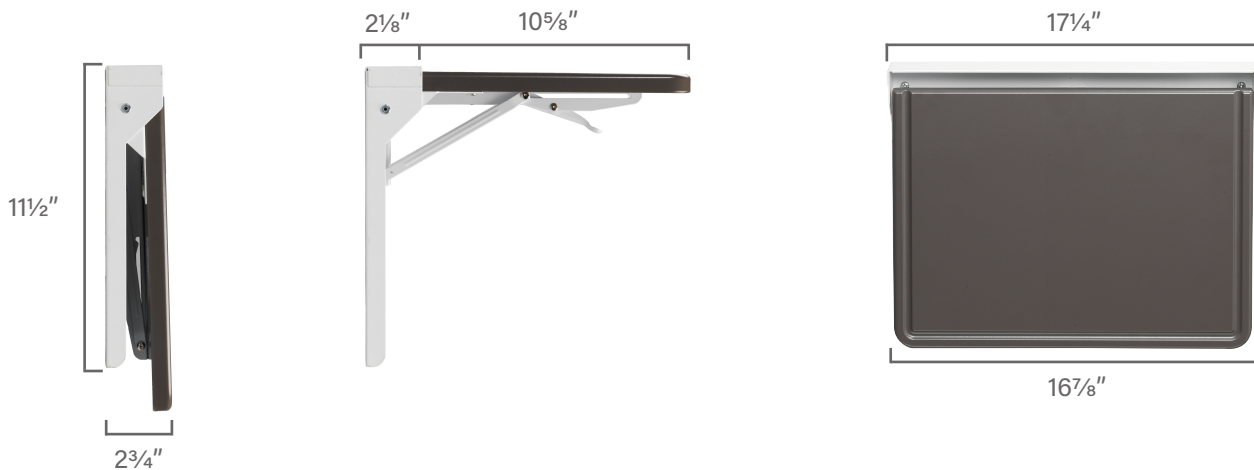

## COLORS




**Dusk Taupe** work surface with white frame (as pictured).  
Custom finishes are also available.

## MATERIALS

Cold Rolled Steel  
 Powder Coat Finish  
 Medium Density Wood Composite - Work Surface

## DESK MOUNTING

Four mounting holes are located on the back of the unit located 16" C/C and should be aligned with wall studs for hanging.

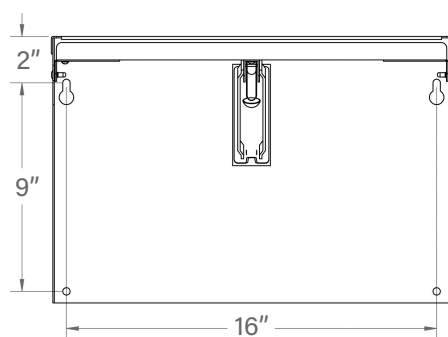

Secure two ¼" lag bolts or screws (hardware not provided) through upper keyholes of back plate.

Hang desk and tighten bolts. Using two more ¼" lag bolts or screws, secure back plate to wall studs through lower holes, also 16" C/C.

To ensure safe and reliable use, mount to a stud, blocking or rigid structure where possible.

## OPERATION

**To Raise Work Surface:**

Lift work surface until handle locks into place.

Caution: Pinch Warning - Do not hold work surface directly under handle while lifting.

**To Lower Work Surface:**

Lift work surface up slightly, squeeze trigger, then lower work surface.

## CARE/CLEANING

The recommended method of cleaning is using a solution of warm water and mild detergent. Use a soft cloth or sponge and a liberal quantity of water. To scrape something off, use a plastic scraper only. Other acceptable cleaners include Fabuloso®, Goo Gone® or an equivalent orange cleaner and 10% bleach to water solution. In no circumstances, should any abrasive cleaner or any cleaner containing ketones, esters, or alcohols be used.

To assure smooth operation of the locking handle, lubricate the four hinge pins with a silicone lubricant regularly as needed.