

Closet Connector Housing Panels (CCH-CP)

CORNING

Features and Benefits

Universal design approach

One-size-fits-all LANscape® Solutions housings


Broadest range of fiber count and adapter types

Solutions for all needs

Colored icon labeling

Easy connector identification

Corning closet connector housing panels (CCH-CP) are offered in a variety of fiber counts for use with LANscape® solutions hardware products for a “one-size-fits-all” approach. Used with factory-installed or field-installable connectors, these panels provide inter-connect or cross-connect capability in a housing at main cross-connects, intermediate cross-connects, telecommunication rooms or work areas. Available with a variety of industry-standard adapter types, the CCH-CP provides an efficient way to securely mate two connectors and offers multimode and single-mode applications in 6-, 8-, 12-, 16- and 24-fiber count options, plus 36-, 72-, 96- and 144-fiber count options with MTP® connector adapters.

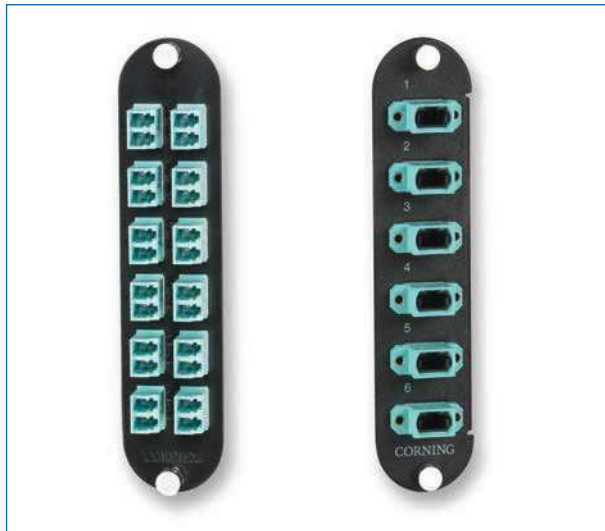

LC Duplex Panel (24-fiber) and MTP Connector Panel (72-fiber) | Photo LAN4525



ST Compatible Panel (12-fiber) and SC Duplex Connector Panel (12-fiber) | Photo LAN4526

Closet Connector Housing Panels (CCH-CP)

CORNING

Ordering Information

C C H - C P	<input type="text"/>	<input type="text"/>	-	<input type="text"/>	<input type="text"/>
	1			2	

1 Select fiber count.


- 06 = 6 fibers
- 08 = 8 fibers
- 12 = 12 fibers
- 16 = 16 fibers
- 24 = 24 fibers
- 36 = 36 fibers
- 72 = 72 fibers
- 96 = 96 fibers
- E4 = 144 fibers

See Note 1.

2 Select adapter code (see Adapter/Connector Code Options table).

Note: Fiber count for desired adapter is available in table on following page.

Part Number Example

Part Number	Product Description	Units per Delivery	
CCH-CP12-A9	Closet Connector Housing (CCH) Panel, LC adapters, Duplex, UPC, 12 F, Single-mode (OS2)	1/1	

CORNING

Closet Connector Housing Panels (CCH-CP)

CORNING

Adapter Code	Fiber Type	Alignment	Housing	Fiber/Adapter	Available Fiber/Panel Counts								
					6	8	12	16	24	36	72	96	144
LC Duplex													
A8	62.5 μm multimode (OM1)	Ceramic	Composite	2	X	X	X	X	X				
D3	50 μm multimode (OM2)	Ceramic	Composite	2	X	X	X	X	X				
E4	50 μm multimode (OM3/4)	Ceramic	Composite	2	X	X	X	X	X				
A9	Single-mode, UPC (OS2)	Ceramic	Composite	2	X	X	X	X	X				
B3	Single-mode, APC (OS2)	Ceramic	Composite	2	X	X	X	X	X				
LC Duplex Shuttered													
AB	62.5 μm multimode (OM1)	Ceramic	Composite	2	X	X	X	X	X				
AC	50 μm multimode (OM2)	Ceramic	Composite	2	X	X	X	X	X				
AD	50 μm multimode (OM3/4)	Ceramic	Composite	2	X	X	X	X	X				
AE	Single-mode, UPC (OS2)	Ceramic	Composite	2	X	X	X	X	X				
AF	Single-mode, APC (OS2)	Ceramic	Composite	2	X	X	X	X	X				
Non-keyed LC Duplex													
BE	Single-mode, red, UPC (OS2)	Ceramic	Composite	2	X	X	X	X	X				
BF	Single-mode, black, UPC (OS2)	Ceramic	Composite	2	X	X	X	X	X				
BG	Single-mode, yellow, UPC (OS2)	Ceramic	Composite	2	X	X	X	X	X				
BH	Single-mode, green, UPC (OS2)	Ceramic	Composite	2	X	X	X	X	X				
BJ	Single-mode, violet, UPC (OS2)	Ceramic	Composite	2	X	X	X	X	X				
BK	Single-mode, orange, UPC (OS2)	Ceramic	Composite	2	X	X	X	X	X				
BL	Single-mode, rose, UPC (OS2)	Ceramic	Composite	2	X	X	X	X	X				
BM	Single-mode, slate, UPC (OS2)	Ceramic	Composite	2	X	X	X	X	X				
SC Duplex													
91	62.5 μm multimode (OM1)	Metal	Composite	2	X	X	X						
G7	50 μm multimode (OM2)	Ceramic	Composite	2	X	X	X						
E7	50 μm multimode (OM3/4)	Ceramic	Composite	2	X	X	X						
59	Single-mode, UPC (OS2)	Ceramic	Composite	2	X	X	X						
D9	Single-mode, APC (OS2)	Ceramic	Composite	2	X	X	X						
SC													
56	62.5 μm multimode (OM1)	Metal	Composite	1	X	X	X						
G6	50 μm multimode (OM2)	Ceramic	Composite	1	X	X	X						
E6	50 μm multimode (OM3/4)	Ceramic	Composite	1	X	X	X						
3C	Single-mode, UPC (OS2)	Ceramic	Composite	1	X	X	X						
6C	Single-mode, APC (OS2)	Ceramic	Composite	1	X	X	X						
ST® Compatible Connector													
15T	62.5 μm multimode (OM1)	Ceramic	Metal	1	X	X	X						
G5	50 μm multimode (OM2)	Ceramic	Metal	1	X	X	X						
H3	50 μm multimode (OM3/4)	Ceramic	Metal	1	X	X	X						
19T	Single-mode, UPC (OS2)	Ceramic	Metal	1	X	X	X						
FC													
11	Single-mode, UPC (OS2)	Metal	Metal	1	X	X	X						
21	Single-mode, APC (OS2)	Metal	Metal	1	X	X	X						
MTP® Connector													
69	62.5 μm multimode (OM1)	N/A	Composite	12						X	X	X	X
G3	50 μm multimode (OM2)	N/A	Composite	12						X	X	X	X
E3	50 μm multimode (OM3/4)	N/A	Composite	12						X	X	X	X
90	Single-mode (OS2)	N/A	Composite	12						X	X	X	X

Fiber Type	Housing Color, Simplex and Duplex	Housing Color, MTP
62.5 μm multimode (OM1)	Beige	Black
50 μm multimode (OM2)	Black	Black
50 μm multimode (OM3/4)	Aqua	Aqua
Single-mode, UPC (OS2)	Blue	Black
Single-mode, APC (OS2)	Green	Black

Closet Connector Housing Panels (CCH-CP)

CORNING

Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.