


Dri-Lite® Loose Tube Single Jacket Single Armor

Series 12D

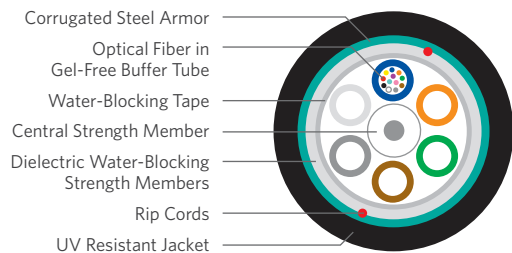

SPECIFICATIONS

Fiber Count	Available in 6-fiber up to 432-fiber
Standards Compliance	Telcordia® GR-20-CORE RDUP PE-90 Designation MLT ICEA S-87-640-2011 RoHS-compliant

Telcordia is a registered trademark of Ericsson Inc.

ENVIRONMENTAL SPECIFICATIONS

Operation/Storage	-40°C to +70°C
Installation	-30°C to +70°C

PART NUMBER KEY

1	2	-	-	-	x	D	0	y	
1	2	3	4	5	6	7	8	9	
Product family	Fiber count (006-432)	Fiber type	Internal designator	Water block/markings (1-8)					

Contact Customer Service for availability of non-standard offerings.

PRODUCT DESCRIPTION

Loose tube cables are the product of choice as the backbone in Outside Plant (OSP) environments. The durable loose tube design offers reliable transmission performance over a broad temperature range. Optical fibers and water-blocking elements are placed inside gel-free buffer tubes. The core is constructed by stranding the buffer tubes around a central member using a reverse oscillating lay (ROL). The core is wrapped with flexible strength members covered with a water-blocking tape. A corrugated steel armor is applied and then encased with a black jacket. Rip cords are included under the armor for ease of entry.

APPLICATIONS

- Direct bury, underground duct and lashed aerial
- Trunk, distribution and feeder cable
- Local loop, metro, long-haul and broadband network

FEATURES

- Available with up to 432-fiber
- Multiple fiber types including composites
- Dry (SAP) core standard
- Standard tube size for all fiber counts
- Corrugated steel armor
- Gel-free tubes

BENEFITS

- High fiber density
- Multiple network applications
- Reduces cable prep and installation time
- Reduces the number of tools required
- Improves compressive strength and rodent protection
- Speeds fiber access and cleanup

PART NUMBERS AND PHYSICAL CHARACTERISTICS

Part Number ¹	Fiber Count	Nominal Diameter in (mm)	Approx. Weight lbs/kft (kg/km)	Maximum Tensile Loading		Minimum Bend Radius	
				Install lbs (N)	Long Term lbs (N)	Install in (mm)	Long Term in (mm)
12006xD0y	6	0.46 (11.7)	84 (125)	600 (2,700)	200 (890)	9.2 (234)	4.6 (117)
12012xD0y	12	0.46 (11.7)	84 (125)	600 (2,700)	200 (890)	9.2 (234)	4.6 (117)
12024xD0y	24	0.46 (11.7)	84 (125)	600 (2,700)	200 (890)	9.2 (234)	4.6 (117)
12036xD0y	36	0.46 (11.7)	84 (125)	600 (2,700)	200 (890)	9.2 (234)	4.6 (117)
12048xD0y	48	0.46 (11.7)	84 (125)	600 (2,700)	200 (890)	9.2 (234)	4.6 (117)
12072xD0y	72	0.49 (12.3)	100 (149)	600 (2,700)	200 (890)	9.8 (246)	4.9 (123)
12096xD0y	96	0.56 (14.3)	125 (186)	600 (2,700)	200 (890)	11.2 (286)	5.6 (143)
12144xD0y	144	0.69 (17.6)	182 (271)	600 (2,700)	200 (890)	13.8 (352)	6.9 (176)
12192xD0y	192	0.69 (17.6)	177 (264)	600 (2,700)	200 (890)	13.8 (352)	6.9 (176)
12216xD0y	216	0.69 (17.6)	177 (264)	600 (2,700)	200 (890)	13.8 (352)	6.9 (176)
12288xD0y	288	0.80 (20.3)	228 (340)	600 (2,700)	200 (890)	16.0 (406)	8.0 (203)
12432xD0y	432	0.91 (21.0)	273.7 (407.4)	600 (2,700)	200 (890)	18.2 (460)	9.2 (234)

FIBER TYPES:

SINGLE MODE

Reduced Water Peak	Zero Water Peak	TeraFlex® Bend Resistant			NZDS	LEAF
3	2	G.657.A1	G.657.A2	G.657.B3	8	S

¹Replace "x" with:

MULTIMODE

TeraGain®	TeraFlex Bend Resistant	Laser Optimized	50/125
62.5/125	10G/150	10G/300	10G/550
6	M	N	P

See "Optical Fiber Specifications" in the "Technical Info" section for detailed fiber type specifications.

WATER BLOCK AND JACKET PRINT CODES

Dry core		Dry core special	
Feet	Meters	Feet	Meters

¹Replace "y" with: 1 2 5 6