Buffer Tube Fan-Out Kits, indoor 12 F, 47-in legs

Part Number:
FAN-BT47-12


Corning indoor buffer tube fan-out kits are specifically designed for the termination of 6- and 12-fiber buffer tubes. These buffer tube fan-out kits provide the ultimate solution for those users who want to field-install connectors on 250 µm coated fibers. The kits provide the most compact, easy-to-install fan-out solution requiring no additional hardware or space than that required for terminating tight-buffered cables. Indoor kits feature a 900 µm fan-out assembly that is color coded to match the fiber color scheme. The fan-out assembly is available with 6- or 12-fiber units in lengths of 0.6 m (25 in) or 1.2 m (47 in). These different lengths provide the installer the flexibility needed for a variety of hardware options.

Features and Benefits

Snap-together furcation
Eliminates epoxy for indoor kits

Fiber routing capabilities
Better fiber management

Compensation for wide temperature fluctuation
Outdoor use

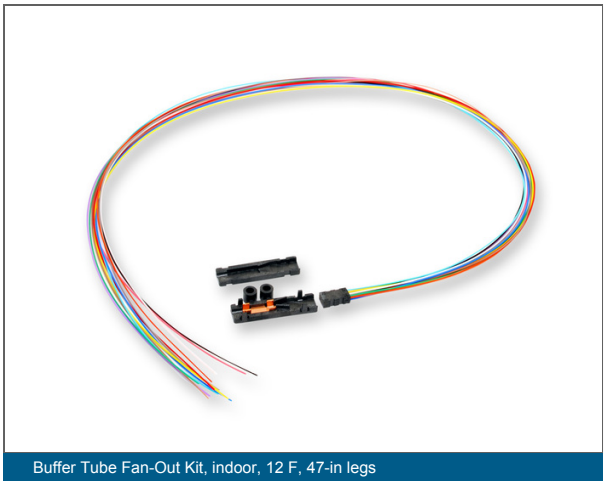

Buffer Tube Fan-Out Kit, indoor, 12 F, 47-in legs

Buffer Tube Fan-Out Kits, indoor 12 F, 47-in legs

Specifications

General Specifications	
Environment	Indoor
Product Type	Fan-out Kits
Fanout Type	Buffer Tube

Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU

Environmental Conditions	
Temperature Range, Operation	0 °C to 70 °C (32 °F to 158 °F)

Design	
Fan-Out Tubing Color	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fiber Count	12
Fibers per Buffer Tube	12

Mechanical Specifications - Fan-Out Kit	
Furcation Length	44.5 mm (1.75 in)
Tubing Length	1193.8 mm (47 in)
Tubing Outer Diameter	0.9 mm (0.04 in)

Ordering Information	
Product Number	FAN-BT47-12
EAN Code	4056418201894
Package Contents	"Fan-out top, fan-out bottom, insert with fan-out tubing"

Buffer Tube Fan-Out Kits, indoor 12 F, 47-in legs

Ordering Information	
Units per Delivery	1/1

Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2023 Corning Optical Communications. All rights reserved.