

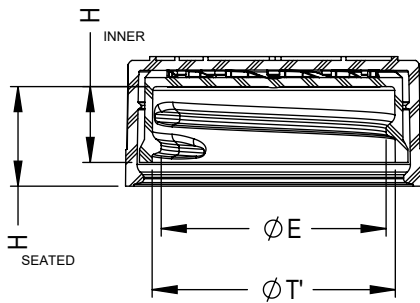


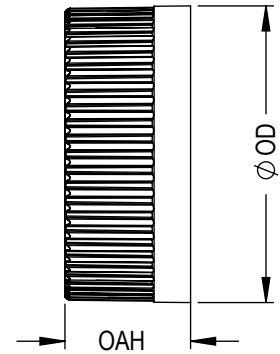

SECTION A-A

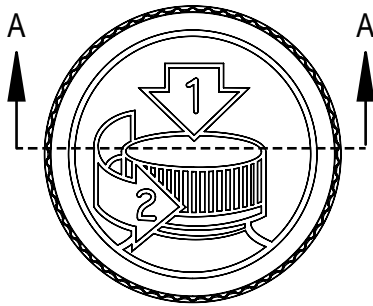

STATIC TORQUE RECOMMENDATION: 15-25 in-lbs
 REQUIREMENT MAY VARY DEPENDING UPON CONTAINER MATERIAL,
 NECK FINISH, AND CAPPING EQUIPMENT

REFERENCE	DIMENSION	TOLERANCE	UNITS
ϕE	1.182 [30.02]	± 0.015 [0.38]	in [mm]
$\phi T'$	1.276 [32.41]	± 0.015 [0.38]	in [mm]
H (SEATED)	0.519 [13.18]	REFERENCE	in [mm]
H (INNER)	0.390 [9.91]	± 0.010 [0.25]	in [mm]
OD	1.545 [39.24]	± 0.020 [0.51]	in [mm]
OAH	0.667 [16.94]	± 0.016 [0.41]	in [mm]
PART WEIGHT	5.9	± 1.4	g
THREAD DETAIL INFORMATION: 6 THREADS PER INCH 0.167" [4.24] PITCH 380° FULL DEPTH THREADS			

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG31948

DESCRIPTION:


33-400 PP Ribbed Sides Cap with CR Pictorial,
 020 SG75 Liner

Safe-Gard™ Type A

Technical Data Sheet

.020" Pulp SG-75M

Revision: SG75M-03142016

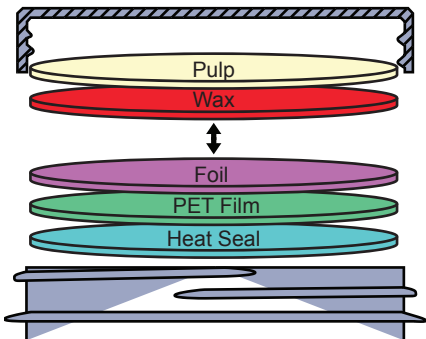Product	.020" Pulp SG-75M			
Scope	Two piece white-lined pulp backed heat induction foil innerseal that will provide a tamper evident seal to PE containers.			
Composition	Material	Standard	Metric	
	Pulp	0.020"	0.508mm	
	Wax	-	-	
	Foil	0.001"	0.025mm	
	PET Film	0.0005"	0.013mm	
	Heat Seal	0.0015"	0.038mm	
FDA Status: 21 CFR 177.1210		Recommended Storage and Handling: Refer to website		
Drug Master File (DMF): 3782		EU / EP Reg.:		
GTR Oxygen: Essentially Zero		MVTR: Essentially Zero		
Sealing to glass containers: Selig can not guarantee the performance or seal integrity of this materials when applied to any glass (treated or untreated) container. We suggest you contact your glass supplier for recommendations on glass treatments that may or may not improve performance or seal integrity.				
Print Location (if any): On foil layer				

Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

Page 2 of 2

DISTRIBUTED BY:



REF NO.:

DWG31948

DESCRIPTION:

33-400 PP Ribbed Sides Cap with CR Pictorial,
020 SG75 Liner

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.