



# Barrington™ | K-3554-T

Two-piece elongated toilet, 1.6 gpf

## Features

- Elongated bowl offers added room and comfort
- Equipped with Sloan FLUSHMATE® – Sloan® Valve Company
- Polished Chrome trip lever
- Tank cover locks included
- Rear outlet
- 4" (102 mm) rough-in
- 1.6 gpf (6.0 lpf)



## Available Colors/Finishes

*Color tiles intended for reference only.*

■ 0 White



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
4-15-2026 8:2 - US-CA

THE BOLD LOOK  
OF **KOHLER**®

## Codes/Standards

*Accessibility standards may require controls to be located on the open side of the toilet.*

*Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.*

ASME A112.19.2/CSA B45.1

DOE - Energy Policy Act 1992

---

## Technical Information

Installation Type:	Floor-mount
Rough-in:	4"
Flush Type:	Pressure Lite
Flush Rate:	1.6 gpf (6 lpf)
Bowl Shape:	Elongated
Seat-Mounting Holes:	5-1/2" (140 mm)
Waste Outlet:	Wall
Trapway Size:	2-1/4" (57 mm)
Trapway Type:	Exposed
Water Surface Size:	12" x 10" (305 mm x 254 mm)
Rim to Water Surface:	7" (178 mm)

---

## Included Combo Skus

- K-4327 Elongated toilet bowl
  - K-4645-T Toilet tank, 1.6 gpf
- 

## Recommended Products/Accessories

K-5588 Deodorizing elongated toilet seat

K-5420 Low-profile toilet bolt caps

K-4108 Elongated bidet toilet seat with remote control

---

## Warranty

*See website for detailed warranty information.*

KOHLER® One-Year Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

4-15-2026 8:2 - US-CA

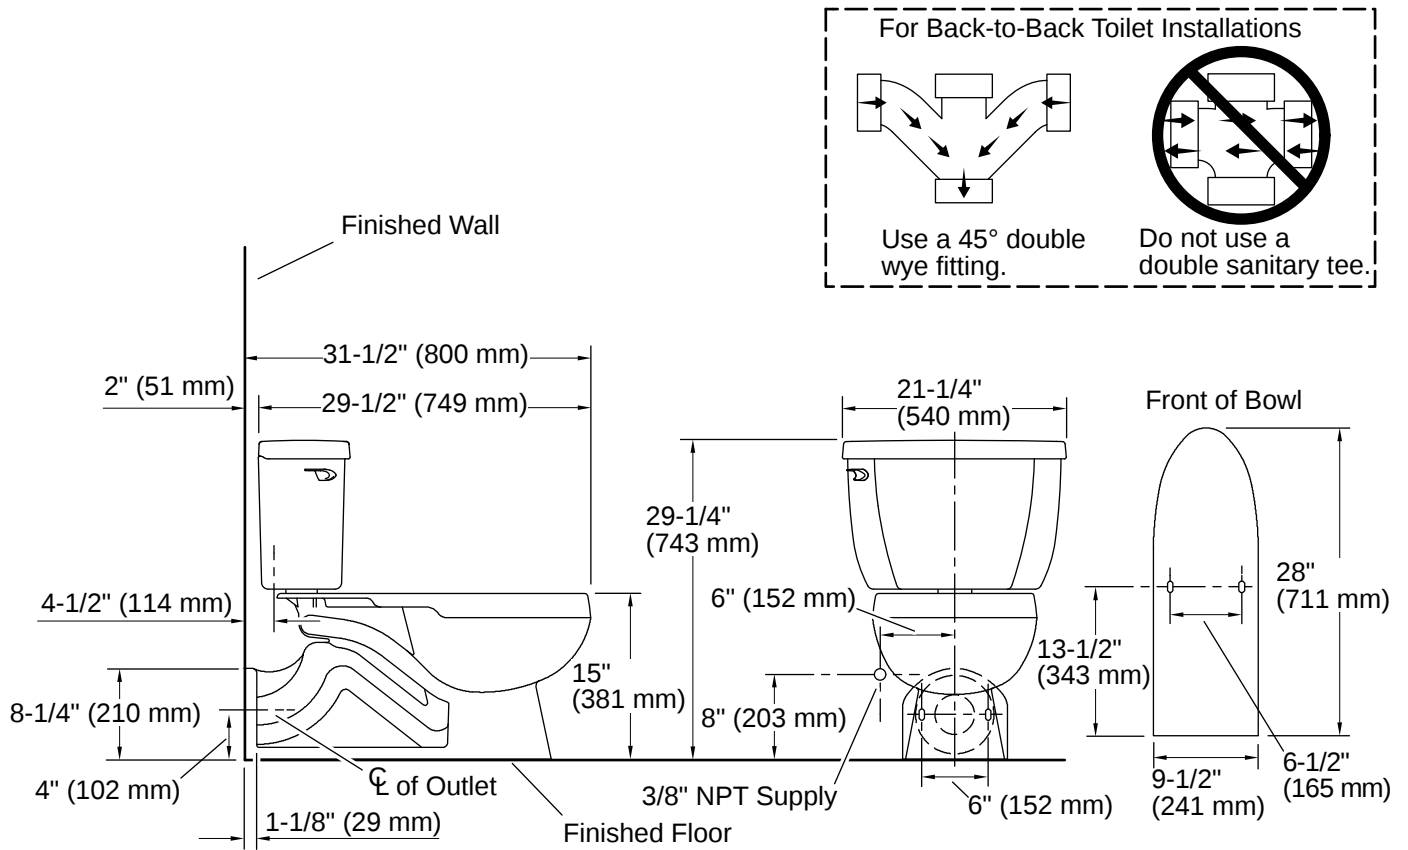

Installation

- Seat and supply line sold separately

Installation Notes

*Install this product according to the installation instructions.*

For back-to-back toilet installations: Use only a 45° double wye fitting.  
 Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

