
SYMMONS® Solarity™

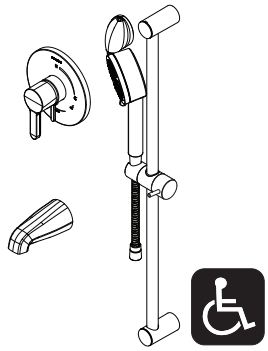

S3394TRM
Tub/Hand Shower Trim
Specification Submittal

Location:

Model Numbers

☐ **S3394TRM**
Tub/Hand Shower Trim

Valve Options:
-S262 Series Temptrol® VersaFlex™ Shower Valve with TRM modifier
-S162 Series Temptrol VersaFlex Shower Valve requires TC modifier

Feature Highlights

- Solarity Tub/Hand Shower Trim.
- Requires Temptrol VersaFlex Pressure-Balancing Shower Valve.
- 30″ slide bar.
- In-line vacuum breaker.
- 60″ flexible metal hose.
- 5-1/8″ slip-on tub spout.
- Single-mode HydroMersion® hand shower wand with Non-Positive Shutoff (NPSO).
- Standard 2.0 gpm (7.6 L/min) flow restrictor.
- Components made from metal and nonmetal materials, plated in standard Polished Chrome finish.

Compliance

- ASME® A112.18.1/CSA® B125.1
- WaterSense® 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation
- CALGreen® 1.5 gpm (5.7 L/min)

Options/Modifications

☐ **15** 1.5 gpm (5.7 L/min) flow restrictor
☐ **L2** Less hand shower wand
☐ **L5** Less hand shower system (bar/cradle, hose, wand, and elbow)
☐ **L7** Less handle
☐ **TC** Test Cap Trim (includes TA-10® & T-12A) *used with S162 Series Temptrol VersaFlex Shower Valve*
☐ **MB** Matte Black finish
☐ **STN** Satin Nickel finish

Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.

SKU Builder

Series	Finish	Modifier	Flow Rate	TRM (required)	TC	Final SKU
S3394	STN		15	TRM		S3394STN15TRM
S3394	MB	L2		TRM	TC	S3394MBL2TRMTC


Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Solarity Tub and Hand Shower System _____ Includes Solarity Tub/Hand Shower trim for Temptrol VersaFlex Pressure-Balancing Shower Valve. Features 30” slide bar, in-line vacuum breaker, 60” flexible metal hose, 5-1/8″ slip-on tub spout, single-mode HydroMersion hand shower wand with NPSO, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and nonmetal materials plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) and 2.0 gpm (7.6 L/min) compliant. Lever handle meets ADA requirements for operation. 1.5 gpm option meets CALGreen requirements. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L2 = Less hand shower wand, L5 = Less hand shower system (bar/cradle, hose, wand, and elbow), L7 = Less handle, TC = Test Cap Trim, MB = Matte Black finish, and STN = Satin Nickel finish.

Symmons Industries, Inc. ▪ 31 Brooks Drive ▪ Braintree, MA 02184 ▪ Phone: (800) 796-6667 ▪ Fax: (800) 961-9621
Copyright © 2026 Symmons Industries, Inc.

Dimensions

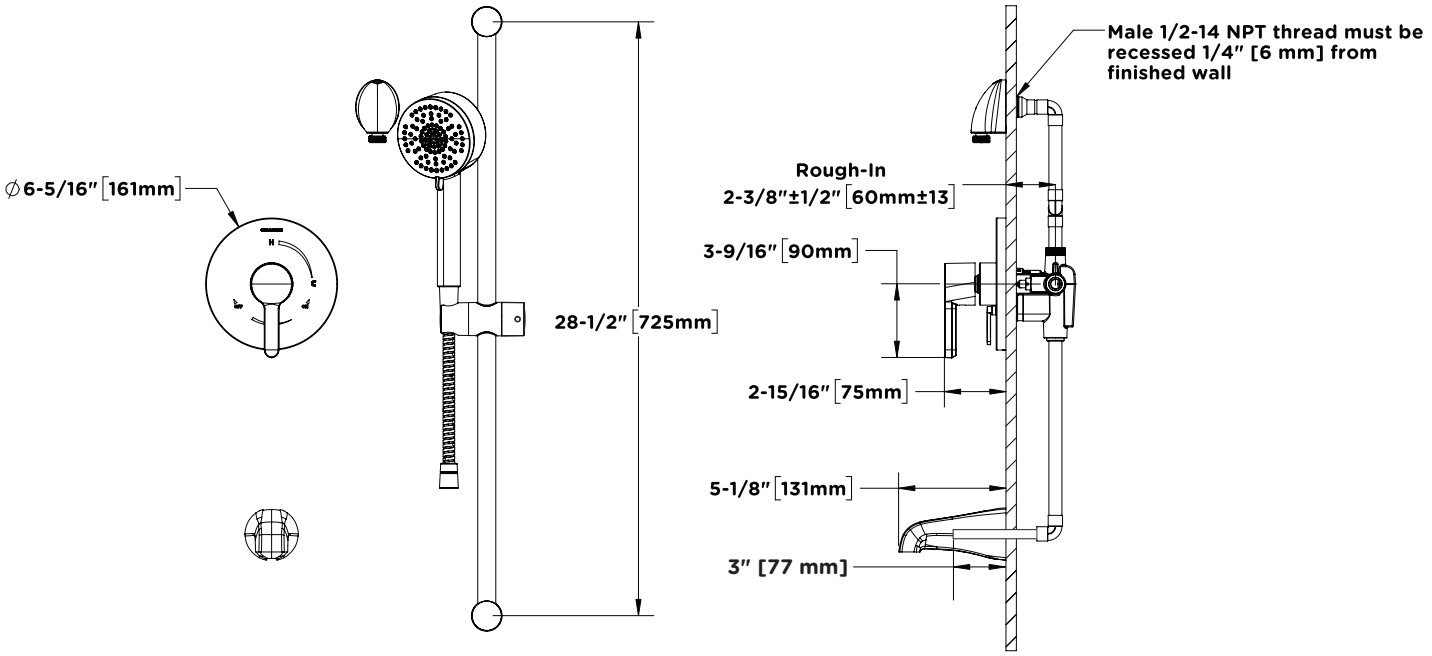

Notes:

1) Valve body and piping not included and shown as reference only.
2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls 1/2″ or greater.
3) All dimensions measured from nominal rough-in.
4) Dimensions subject to change without notice.

Copyright © 2026 Symmons Industries, Inc. ▪ symmons.com ▪ gethelp@symmons.com ▪ ZV-4150 REV A ▪ 090326