

ENESPRO® ELECTRICAL SAFETY PRODUCTS

A Enespro® Disconnect Hotstick AGHS-DS6 | 6'

- Fixed disconnect head allows the user to disconnect or reconnect different types of overhead fuses, cutouts, or disconnect switches from a safe distance
- Compliance: ASTM F711

B Enespro Rescue Hook AGHS-RH6 | 6'

- The rescue hook allows for safe rescue from a distance if someone becomes incapacitated from electrical shock
- Compliance: ASTM F711

C Enespro Class 00 Roll Blankets BRC00-36X72 | 36" X 72" BRC00-10YD | 36" X 10 YARD ROLL

- Electrically tested & marked
- Type II, Class 00 - Max Use Voltage 500V AC/750V DC
- Compliance: ASTM F2320
- Self extinguishing & resistant to low temperatures (-40° F for 4 hours)

D Enespro Class 0 Roll Blankets BRC0-36X72 | 36" X 72" BRC0-10YD | 36" X 10 YARD ROLL

- Self extinguishing & resistant to low temperatures (-40° F for 4 hours)
- Type II, Class 0 - Max Use Voltage 1,000V AC/1,500V DC
- Compliance: ASTM F2320

E Enespro Class 1 Roll Blankets BRC1-36X72 | 36" X 72" BRC1-10YD | 36" X 10 YARD ROLL

- Electrically tested & marked
- Type II, Class 1 - Max Use Voltage 7,500V AC/112,250V DC
- Compliance: ASTM F2320
- Self extinguishing & resistant to low temperatures (-40° F for 4 hours)

F Enespro Class 1 Clear Roll Blankets BRC1-CLR-36X72 | 36" X 72" BRC1-CLR | 36" X 10 YARD ROLL


- Electrically tested & marked
- Class 1 - Max Use Voltage 7,500V AC/112,250V DC
- Compliance: ASTM F1742

G Enespro Class 2 Switchboard Matting AGSMC2-25 | 36" X 25 YARD ROLL

- Type II, Class 2 - Max Use Voltage 17,000V AC/25,500V DC
- Compliance: ASTM D178

H Enespro Blanket Pins AGB-PIN12 | 12 PACK

- Rubber tips permanently molded to avoid cracking & splitting
- Rubber inner surface will not scratch or damage blankets

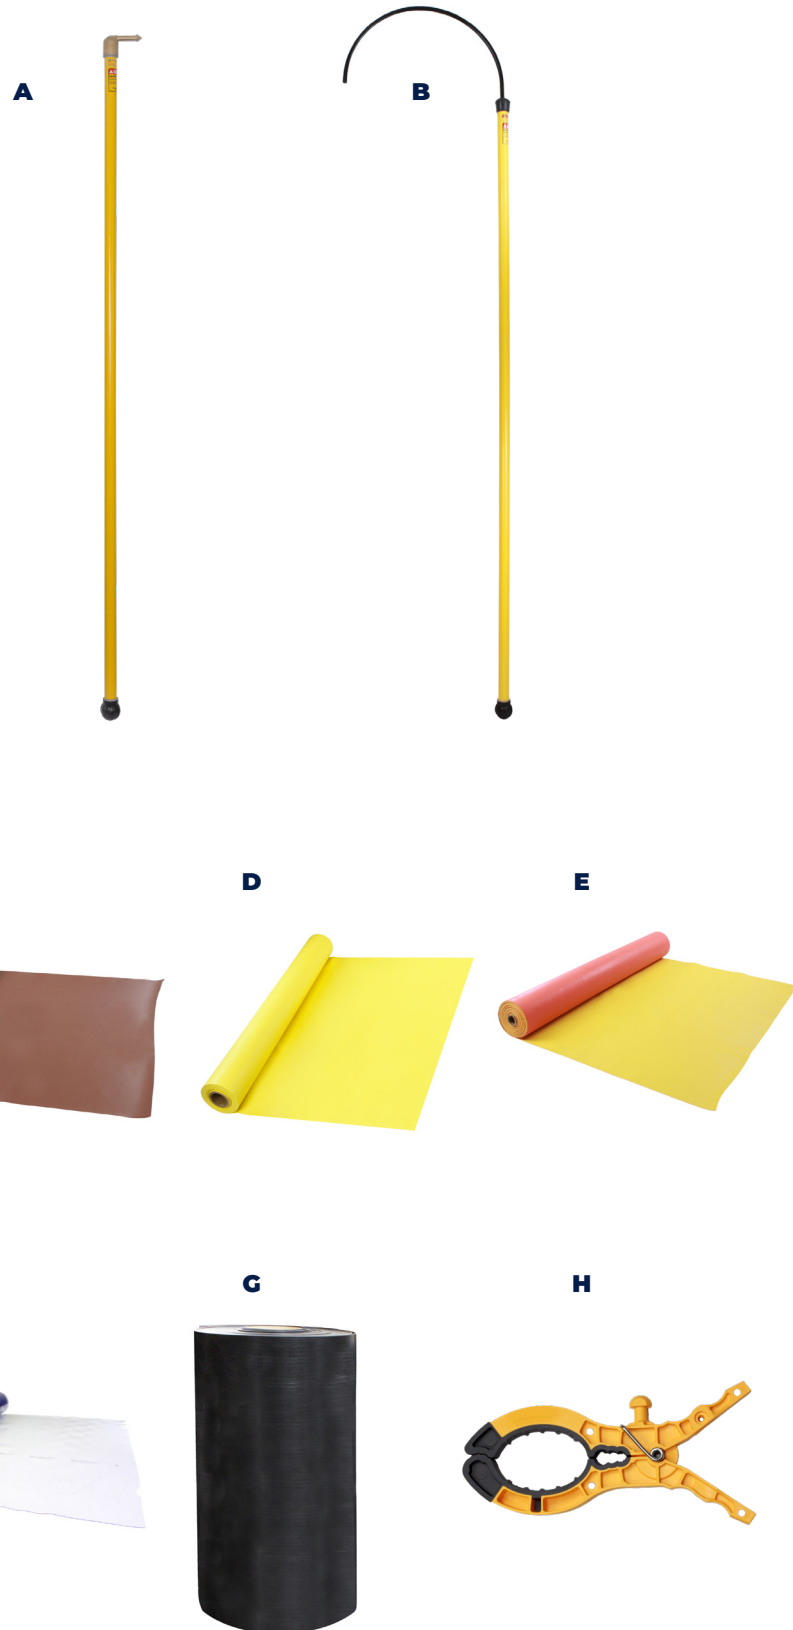

ENESPRO® ELECTRICAL SAFETY PRODUCTS

A Enespro Static Discharge Hotstick AGHS-SDS | 3.8'

- Static discharge stick is used to safely clear any static electricity after equipment has been deenergized
- Class 3 flat face grounding clamp and copper hook conduct static electricity away from equipment
- Compliance: ASTM F-711

B Enespro® Universal Hotstick AGHS-U6 | 6'

- Universal "teeth" allow for compatibility with a wide variety of tools & attachments serving a multitude of different applications
- Compliance: ASTM F-711

C Universal Clamp Stick Adapter AGHSA-SS

Universal head attaches and retracts into Clamp Stick (Shotgun Stick), enabling it to be used as a universal hot stick.

DISCONNECT TOOL ATTACHMENTS:

Disconnect tool attachments allow the user to disconnect or reconnect different types of overhead fuses, cutouts, or disconnect switches from a safe distance

D Universal Disconnect Head AGHSA-DH

E Universal Fuse Fang AGHSA-FF

F Universal Alligator Head AGHSA-AL

CAMERA MOUNT ATTACHMENTS:

Allows user to diagnose problems with live overhead electrical equipment and confined spaces from a safe distance

G Universal Camera Mount Adapter AGHSA-USM

H Universal Action-Style Camera Mount AGHSA-CM

