


Specifications



Photo is representative

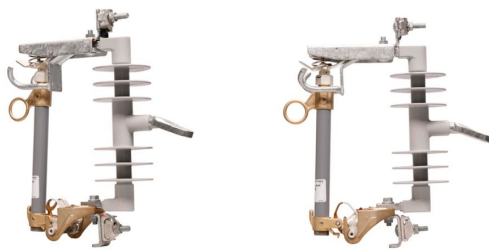

Eaton S9D3L0A

Eaton Cooper Power series L-cutout, 300A disconnect, Interrupt sym: 8600A
Momentary, 27 kV, No brkt, Polymer, BIL: 150 kV, Fuse holder: 300A blade, Bottom: Large eyebolt

General specifications

PRODUCT NAME	Eaton Cooper Power series L-cutout
CATALOG NUMBER	S9D3L0A
UPC	194006033213
PRODUCT LENGTH/DEPTH	19.6 in
PRODUCT HEIGHT	13.5 in
PRODUCT WIDTH	3.75 in
PRODUCT WEIGHT	12.346 lb
COMPLIANCES	CSA 310-09
CERTIFICATIONS	ANSI/IEEE Std C37.41 ANSI/IEEE Std C37.40 ANSI/IEEE Std C37.42
PRODUCT TYPE	L-cutout

Accessories

FUSING HOLDER OPTION	300A blade
-----------------------------	------------

Description

MATERIAL (INSULATION)	Polymer
------------------------------	---------

TERMINATION BOTTOM	Large eyebolt
---------------------------	---------------

Mounting

MOUNTING TYPE	No bracket
----------------------	------------

Resources

CATALOGS	Arrester/flipper fuse combinations catalog
----------	--

SPECIFICATIONS AND DATASHEETS	Eaton Specification Sheet - S9D3L0A
-------------------------------	---

Additional specifications

PACKAGING	Individual packaging (standard)
------------------	---------------------------------

Electrical Ratings

AMPERAGE RATING	300 A
------------------------	-------

BASIC IMPULSE LEVEL	150kV
----------------------------	-------

INTERRUPTING CURRENT - ASYMMETRICAL	12,000A Momentary
--	-------------------

INTERRUPTING CURRENT - SYMMETRICAL	8600A Momentary
---	-----------------

VOLTAGE RATING - MAX	27 kV
-----------------------------	-------

Type

CUTOUT TYPE	L-cutout
--------------------	----------

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2026 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

