


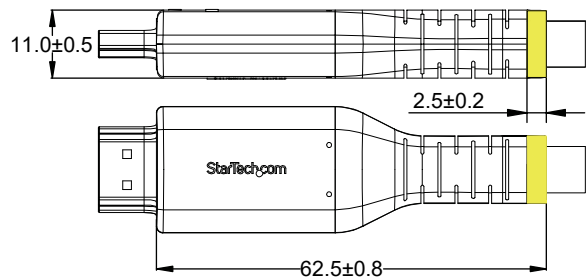


(CN.1)

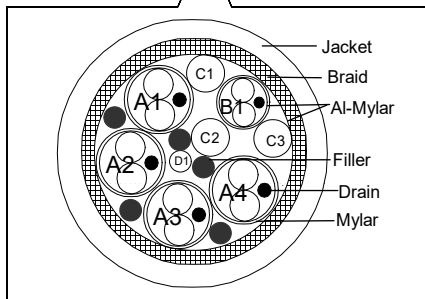

(CN.2)

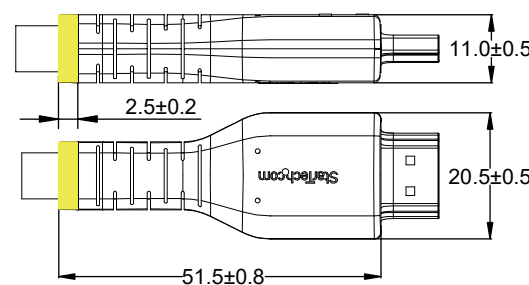


Wire Pin Assignment and Wire Description

CN.1	Signal Assignment	CN.2	WIRE
1	TMDS DaTa2+	1	WHITE
2	TMDS DaTa2 Shield	2	DRAIN
3	TMDS DaTa2-	3	ORANGE
4	TMDS DaTa1+	4	WHITE
5	TMDS DaTa1 Shield	5	DRAIN
6	TMDS DaTa1-	6	GREEN
7	TMDS DaTa0+	7	WHITE
8	TMDS DaTa0 Shield	8	DRAIN
9	TMDS DaTa0-	9	BROWN
10	TMDS Clock+	10	WHITE
11	TMDS Clock Shield	11	DRAIN
12	TMDS Clock-	12	BLUE
14	Utility/HEAC+	14	WHITE
17	DDC/CEC Ground/HEAC Shield	17	DRAIN
19	Hot Plug Detect/HEAC-	19	YELLOW
13	CEC	13	RED
15	SCL	15	PURPLE
16	SDA	16	BLUE
18	+5V Power	18	GREEN
SHELL		SHELL	BRAID

PART NUMBER	LENGTH
RH2A-7M-HDMI-CABLE	7000+200/-0
RH2A-10M-HDMI-CABLE	10000+200/-0

THIRD ANGLE PROJECTION



GENERAL NOTES

DIMENSIONS ARE IN MM - DO NOT SCALE
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS PROPERTY OF STARTECH.COM



PRODUCT ID	RH2A-xM-HDMI-CABLE		
DESCRIPTION	Rugged 2.0 4K 60Hz UHD Active HDMI Cable w/ Ethernet		
DO NOT SCALE	SHEET: 1 OF: 1	UPLOAD DATE: 11/22/2023	