



Location:

**3520-B-TRM, 3520BTRMTC**  
**Shower Valve Trim**  
**Specification Submittal**



**Feature Highlights**

- Dia Shower Valve Trim
- Requires Temptrol® Pressure Balancing Shower Valve
- Metal blade handle
- Showerhead not included
- Tub spout not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 3520BTRMTC)

**Model Numbers**

- 3520-B-TRM**  
Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately
- 3520BTRMTC**  
Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

**Compliance**

- ASME A112.18.1/CSA B125.1



**Warranty**


**Limited Lifetime** - to the original end purchaser in consumer/residential installations.  
**5 Years** - for industrial/commercial installations.  
Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.  
Go to [www.symmons.com/register](http://www.symmons.com/register) to register your Symmons product.

**Options/Modifications**

- Delete Suffix B**      *Chrome plastic escutcheon on valve with color graphic/indicators in place of standard brass escutcheon*
- REB**              *Rebuild trim kit, includes TA-10 and TA-4*
- VP**                *Vandal resistant escutcheon screws in place of standard screws*
- STN**              *Satin Nickel finish*

**Note:** Append appropriate -suffix to model number.

## Dimensions

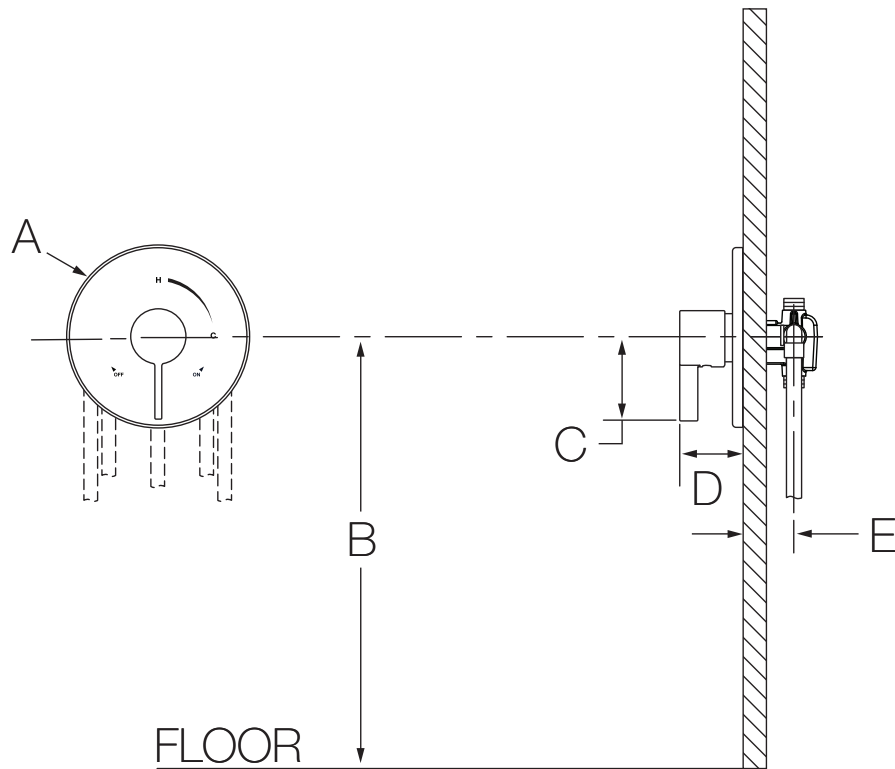

Measurements	
A	Ø 7-1/2", 191 mm
B	Ref. 42", 1067 mm
C	3", 76 mm
D	2-7/8", 73 mm
E	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see E as reference).
- 4) Dimensions subject to change without notice.