

Product data sheet

Specifications



PanelSeT CRN plain door w/o mount.plate. H700xW500xD250 IP66 IK10 RAL7035..

NSYCRN75250

Product availability: Stock - Normally stocked in distribution facility

Main

Range	PanelSeT
Product name	PanelSeT CRN
Application	Multi-purpose
Category	Compact enclosure
Enclosure nominal height	27.6 in (700 mm)
Enclosure nominal width	19.7 in (500 mm)
Enclosure nominal depth	9.8 in (250 mm)
Installation accessory type	Wall-mounting
Device composition	1 body 1 cable gland plate 1 door 1 lock
Door type	Solid
Mounting plate description	Without mounting plate

Complementary

body type	Sides made from a single folded section Back welded with double profile forming a protected sealed area
Number of doors	Front face 1
Door opening side	Reversible 120 °)
Lock type	3 mm double-bar lock
Type of gland plate	Standard
Accessibility for operation	Front
Removable parts	Door by hinges Cable gland plate by screws
Material	Body steel
Surface finish	epoxy-polyester powder
color	Gray RAL 7035)
Standards	IEC 62208 UL CUL
Product Certifications	cUL UL DNV-GL
Product Weight	33.07 lb(US) (15 kg)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Environment

IP degree of protection	IP66 IEC 60529
IK degree of protection	IK10 IEC 62262

Ordering and shipping details

Category	US10ES180034
Discount Schedule	0ES1
GTIN	3606480211881
Returnability	Yes
Country of origin	ES

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	10.433 in (26.500 cm)
Package 1 Width	20.079 in (51.000 cm)
Package 1 Length	28.346 in (72.000 cm)
Package weight(Lbs)	33.069 lb(US) (15.000 kg)
Unit Type of Package 2	PAM
Number of Units in Package 2	18
Package 2 Height	72.835 in (185.000 cm)
Package 2 Width	39.370 in (100.000 cm)
Package 2 Length	47.244 in (120.000 cm)
Package 2 Weight	623.909 lb(US) (283.000 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	141 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	73 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	30 kg CO2 eq.
Carbon footprint of the installation phase [A5]	3 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	35 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	No
SCIP Number	E893f0a0-d2cc-4011-9425-3873dde70142
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Cadmium and cadmium compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	98
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration

Dimensions

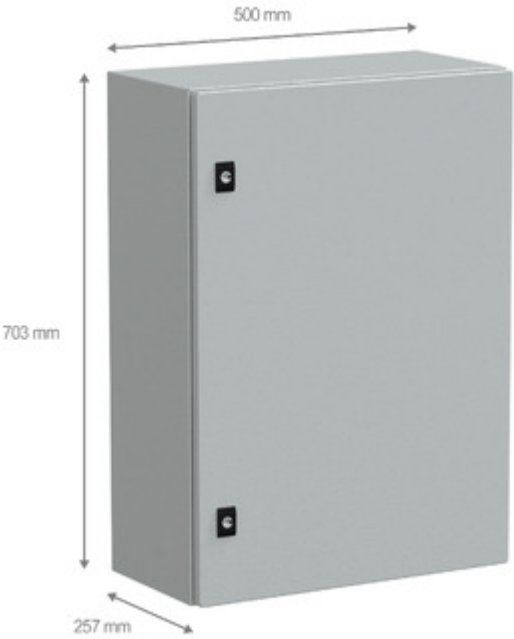

Offer Marketing Illustration

Product benefits / Features



Sturdy components' protection



Earthing studs included



Large choice of dimensions & accessories



Quality & aesthetics



Easy to equip
Easy to maintain



Built to last



Image of product in real life situation

