SYMMONS® Duro®



3692TRM
Tub/Shower Trim
Specification Submittal

Location:

Model Numbers

☐ **3692TRM**
Tub/Shower Trim

Valve Options:
-262 Series Temptrol® Shower Valve with TRM modifiers
-162 Series Temptrol Shower Valve requires TC modifier

Feature Highlights

- Duro Tub/Shower Trim.
- Requires Temptrol® Pressure-Balancing Shower Valve.
- Metal lever handle.
- 5-5/8″ square diverter tub spout.
- Single-mode HydroMersion™ showerhead.
- Standard 2.0 gpm (7.6 L/min) flow restrictor.
- Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish.

Compliance

- ASME® A112.18.1/CSA® B125.1
- WaterSense® 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation

C US

Certified by CSA Group

Options/Modifications

☐ **15** CG 1.5 gpm (5.7 L/min) flow restrictor
☐ **L1** Less showerhead
☐ **L4** Less head, arm, and flange
☐ **L7** Less handle
☐ **TC** Test Cap Trim (includes TA-10™ & T-12A) *used with 162 Series Temptrol Shower Valve*
☐ **BBZ** Brushed Bronze finish
☐ **MB** Matte Black finish
☐ **STN** Satin Nickel finish

Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.

SKU Builder

Series	Finish	Modifier	Flow Rate	TRM (required)	TC	Final SKU
3692	STN		15	TRM		3692STN15TRM
3692	MB	L1		TRM	TC	3692MBL1TRMTC

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Duro Tub and Shower Trim _____ Includes Duro Tub/Shower Trim for Temptrol Pressure-Balancing Shower Valve. Features metal lever handle, 5-5/8″ square diverter tub spout, single-mode HydroMersion showerhead, and standard 2.0 gpm (7.6 L/min) flow rate. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) and 2.0 gpm (7.6 L/min) compliant. Lever handle meets ADA requirements for operation. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L1 = Less showerhead, L4 = Less head, arm, and flange, L7 = Less handle, TC = Test Cap Trim, BBZ = Brushed Bronze finish, MB = Matte Black finish, and STN = Satin Nickel finish.

Symmons Industries, Inc. ▪ 31 Brooks Drive ▪ Braintree, MA 02184 ▪ Phone: (800) 796-6667 ▪ Fax: (800) 961-9621
Copyright © 2026 Symmons Industries, Inc. ▪ symmons.com ▪ gethelp@symmons.com ▪ ZV-3992 REV A ▪ 010626

Dimensions

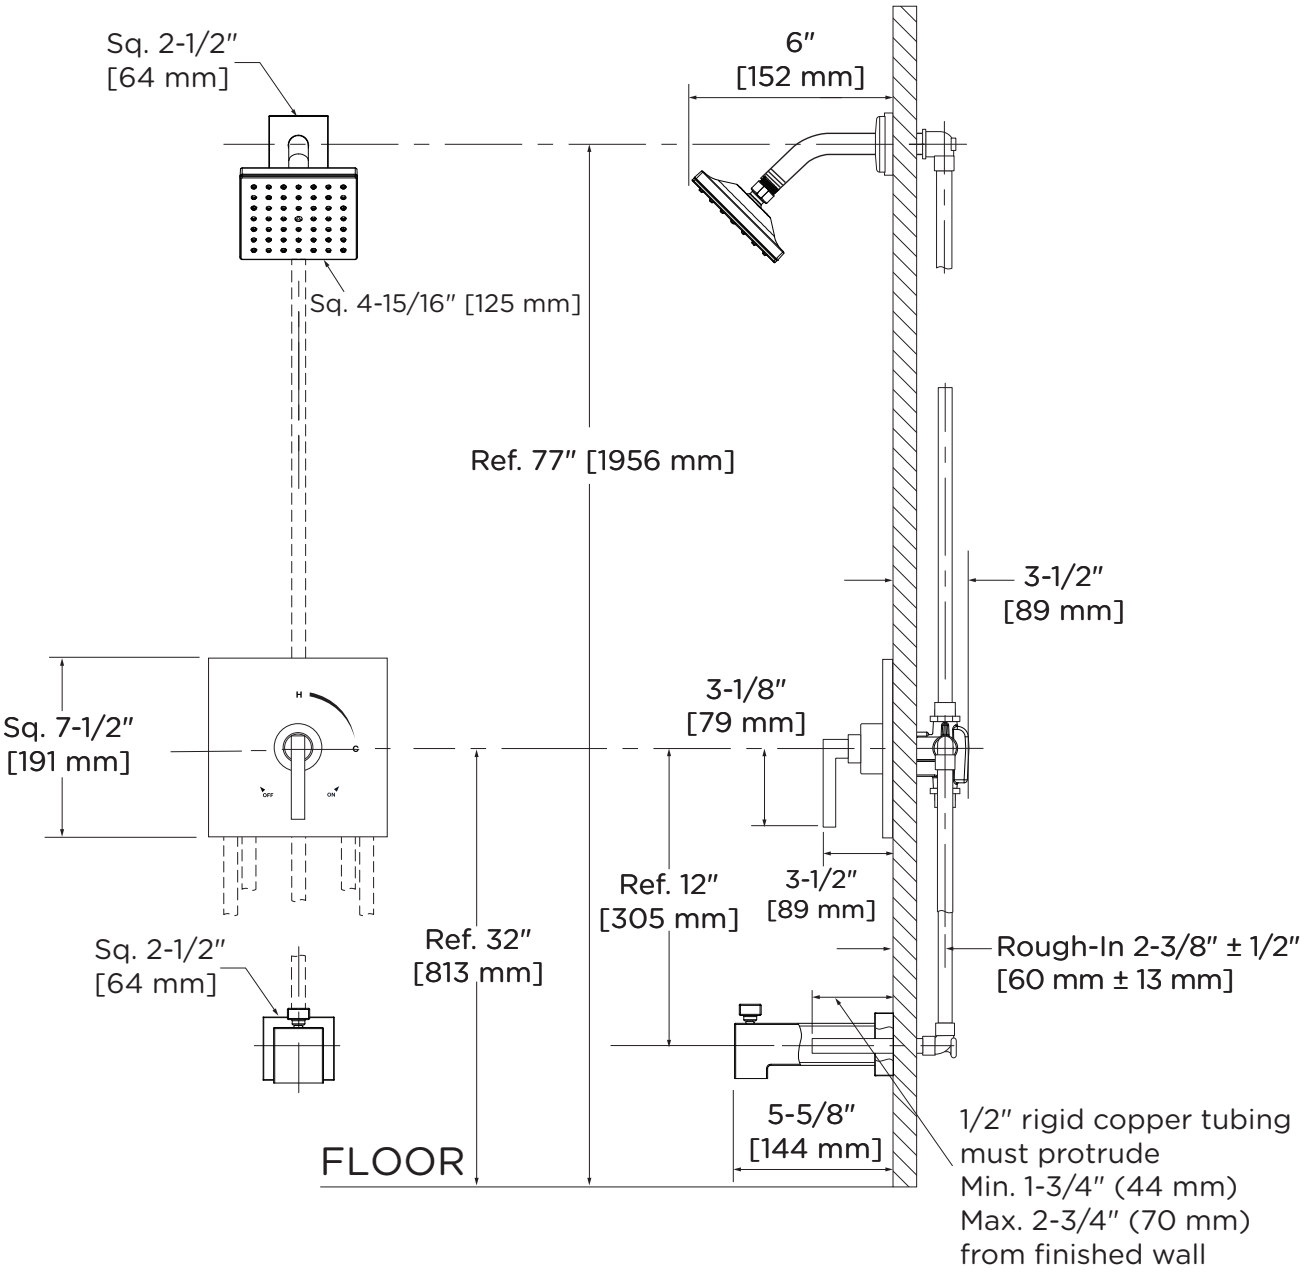

Notes:
1) Valve body and piping not included and shown as reference only.
2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls 1/2″ or greater.
3) All dimensions measured from nominal rough-in.
4) Dimensions subject to change without notice.

Copyright © 2026 Symmons Industries, Inc. ▪ symmons.com ▪ gethelp@symmons.com ▪ ZV-3992 REV A ▪ 010626