


POSI-TEMP®



- Posi-Temp Tub/Shower**  
T2903EP\*◇♻️♻️  
T2903NH\*♻️♻️
- Posi-Temp Shower Only**  
T2902EP\*◇♻️♻️  
T2902NH\*♻️♻️
- Posi-Temp Valve Only**  
T2901\*♻️♻️

COORDINATING ACCESSORIES

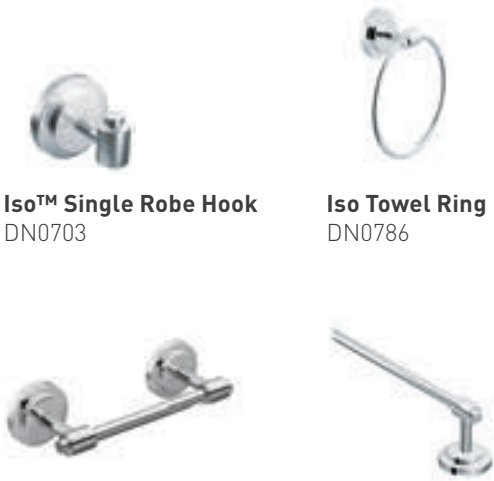

- Iso™ Single Robe Hook**  
DN0703
- Iso Towel Ring**  
DN0786
- Iso Pivoting Paper Holder**  
DN0708 Ⓟ
- Iso 18" Towel Bar**  
DN0718
- Iso 24" Towel Bar**  
DN0724

GIBSON FINISH OPTIONS



Chrome, Brushed Nickel (BN),  
Matte Black (BL)

Not all platforms available in all finishes.  
To view ordering instructions, see reference chart on pages 205-211.

- ☒ Immersion Rainshower Technology
- ♻️ Moen M•PACT™ Common Valve System
- EP Eco-Performance
- NH Without Showerhead
- ♻️ ADA-Compliant
- Ⓟ Pivoting Technology
- † All indicated Moen lav faucets are manufactured in compliance with the applicable requirements of the EPA High-Efficiency Lavatory Faucet Specification.
- \* Rough-in valve required. Please see price catalog for rough-in model numbers.
- ◇ All indicated Moen flow-optimized showerheads use up to 30% less water (compared to traditional showerheads) without sacrificing performance, are certified to meet WaterSense® labeling criteria and contribute toward maximizing LEED® points.