




Z520

9 [229] ADJUSTABLE HEAVY-DUTY DRAIN

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

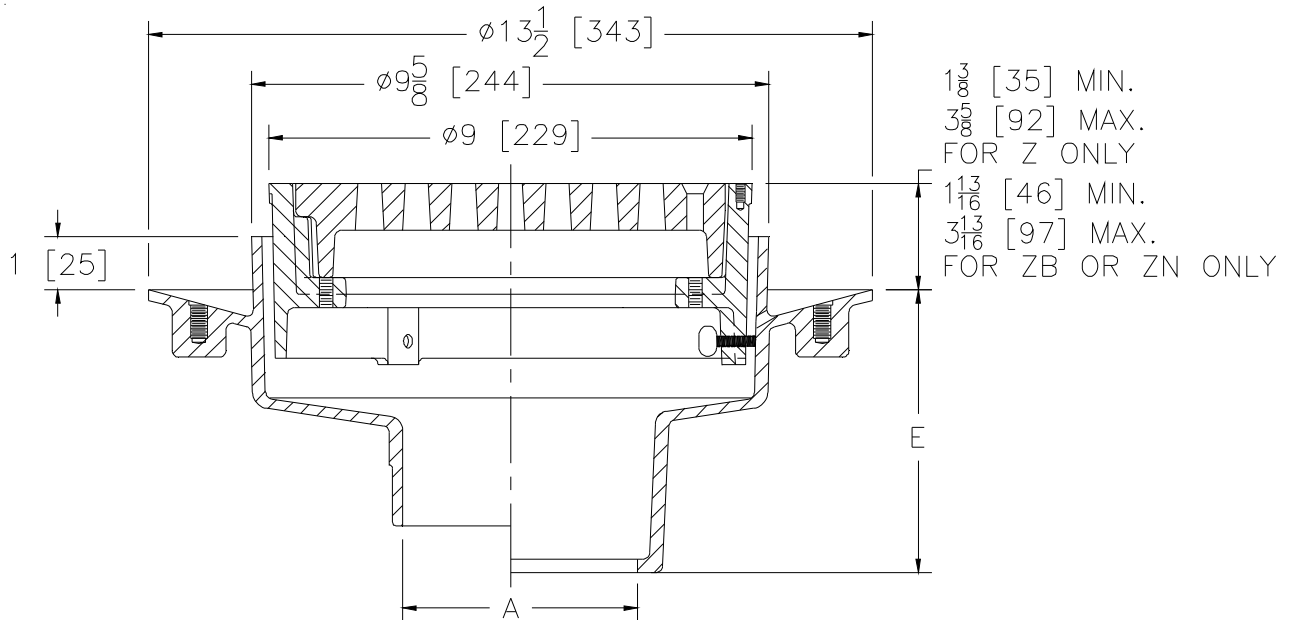

A Pipe Size In.	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2-3-4 [51-76-102]	39 [18]	18 [116]
6 [152]	44 [20]	

ENGINEERING SPECIFICATION: ZURN Z520

9 [229] Diameter top drain, Dura-Coated cast iron body with bottom outlet, seepage pan and adjustable extension frame with heavy-duty cast iron deep flange slotted grate.

OPTIONS (Check/specify appropriate options)**PIPE SIZE**

2 thru 4 [51 thru 102]
2 thru 4 [51 thru 102]
2 thru 4 [51 thru 102]
2 thru 4, 6 [51 thru 102, 152]
2 thru 4 [51 thru 102]

(Specify size/type) **OUTLET**

___ IC Inside Caulk
___ IG Inside Gasket
___ IP Threaded
___ NH No-Hub
___ NL Neo-Loc

'E' DIM.

5-1/4 [133]
5-1/4 [133]
3-1/2 [89]
4-1/4 [108]
4-3/8 [111]

PREFIXES

___ Z D.C.C.I. Body and Top*
___ ZB D.C.C.I. Body w/ Polished Bronze Top (Add 5/8 [16] to 9 [229] Dim.)
___ ZN D.C.C.I. Body w/ Polished Nickel Bronze Top (Add 5/8 [16] to 9 [229] Dim.)

SUFFIXES

___ -C Clamp Collar
___ -DG Duresist Grate
___ -F Extension Frame (Specify Total Height Req'd)
___ -G Galvanized Cast Iron
___ -HP Heel-Proof Grate
___ -P Trap Primer Connection
___ -S Secondary Strainer
___ -SC Solid Cover
___ -SG Solid Gasketed Cover
___ -SS Stainless Mesh Liner for Bucket

___ -T Square Top
___ -TC Neo-Loc Test Cap Gasket
(2-4 [51-102] NL Bottom Outlet Only)
___ -TS Top Secured with Slotted Screws
___ -V Backwater Valve (See Z1099)
___ -VP Vandal-Proof Secured Top
___ -Y Sediment Bucket
___ -90 90° Side Outlet (See Z1042)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. G DATE: 02/20/13 C.N. NO. 128800

PROD./DWG. NO. Z520

ZURN INDUSTRIES, LLC ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292