

PVC COATED ALUMINUM YARD ELBOWS

Features:


- Exterior PVC coating thickness is a minimum 0.040"
- Interior Urethane coating thickness is a minimum 0.002"
- NPT thread with end-cap on each end
- Sizes available are ½" to 4"

Applications:

Calbond PVC Coated Yard Elbows are used in stub up applications and feature 40 mil PVC exterior coating with 2 mil urethane coating on the interior.

Standards:

- UL/CUL listed in accordance with UL6A & ANSI C80.5 Standards
- UL/cUL listed rigid nonferrous metal conduit with polyvinyl chloride coating verified for PVC adhesion performance
- Complies with NEMA RN-1
- UL File Number E230584

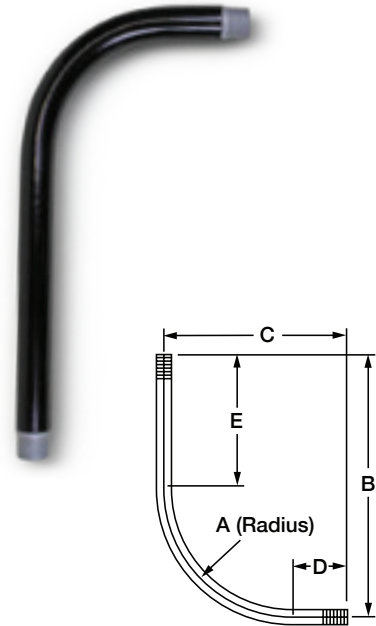

Part Number	Trade Size (in)	B (in)	B (in)	C (in)	D (in)	E (in)
PA0590YL00	½ x 90°	4.00	18.00	6.19	2.19	14.00
PA0790YL00	¾ x 90°	4.50	18.00	6.75	2.25	13.50
PA1090YL00	¾ x 90°	5.75	18.00	8.63	2.88	12.25
PA1290YL00	1¼ x 90°	7.25	19.25	10.25	3.25	12.25
PA1590YL00	1 ½ x 90°	8.25	20.50	11.63	3.38	12.25
PA2090YL00	2 x 90°	9.50	21.50	14.50	5.00	12.00
PA2590YL00	2½ x 90°	10.50	22.50	16.00	5.50	12.00
PA3090YL00	3 x 90°	13.00	25.00	19.25	6.25	12.00
PA3590YL00	3 ½ x 90°	15.00	27.00	22.75	7.75	12.00
PA4090YL00	4 x 90°	16.00	28.00	24.00	8.00	12.00

All dimensions are for informational purposes only *Tolerances +/- 5%

