

FAUCET DESCRIPTION

- Manual mechanical Mixing Valve to temper water
- 3/8" compression fittings

OPERATION

- Use one Mixing Valve per faucet
- Loosen phillips head screw above lever tab. Turn tab clockwise for colder. Turn tab counter clockwise for hotter. Tighten Phillips screw above tab when desired temperature is reached.
- Install Mixing Valve below faucet inlet

VALVES


- In-line check valve included

STANDARDS

- Third party certified to meet NSF 61/9 & 372


WARRANTY

- Warranted for 5 years against material or manufacturers defects.

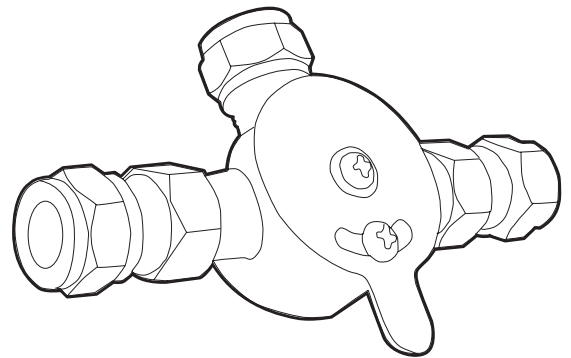

Mechanical Mixing Valve

Model: 104424

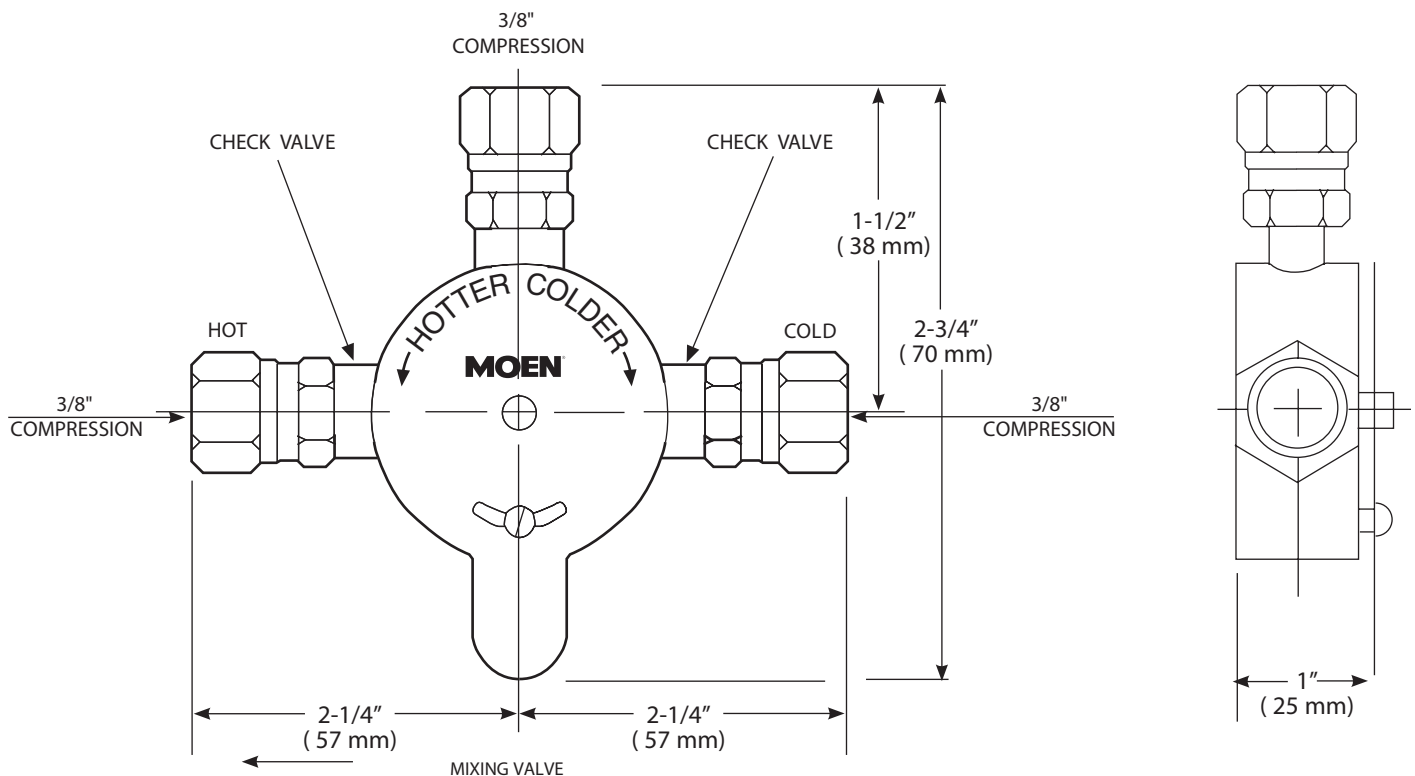

CRITICAL DIMENSIONS

(DO NOT SCALE)