




BE808 BE-SERIES

8", 3-WAY SHALLOW DEPTH, BI-AMP READY, IN-WALL LOUDSPEAKER

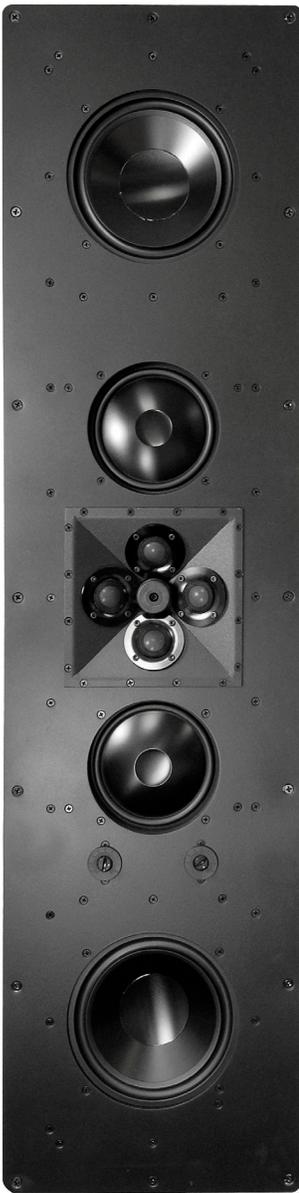

- (2) 8" (203mm) Aluminum Cone Woofers**
- (2) 6.5" (165mm) Neodymium Mid-Drivers**
- (4) 1" (25mm) Beryllium Dome Tweeters**

There is nothing quite like the workmanship that goes into building these speakers; each unit is hand assembled, tested, and packaged by craftsman in the USA. The BE808 in-wall reference loudspeaker features high output driver components, set into a solid aluminum baffle, coupled with James quad tweeter array, incorporating four 1" (25mm) beryllium dome tweeters in a 22.5° offset array for wide dispersion, high power handling, and low distortion promises to deliver only the best audiophile quality sound.

Perfect for home theaters and stereo systems, these in wall speakers deliver top quality sound while saving space in any environment. The truly superior quality and design of these speakers is immediately prevalent. Equipped with two high output aluminum cone woofers and a pair of powerful aluminum cone neodymium mid-range drivers, the BE808 has an impressive 98dB sensitivity, with bass down to 45Hz, and the beryllium dome tweeters deliver the most crisp, clear high frequencies available.

The sealed cabinet design features all aircraft grade aluminum for strength, and sonic performance.

Designed for easy installation into 2x4 stud walls, 16" on center, with some additional stud framing required.

For outdoor/marine applications, order the BE808-M.



| | |
|---------------|---|
| Size | 50.625 h x 12.95 w x 3.875 d (in) 1286 h x 329 w x 98 d (mm) |
| Freq Response | 45Hz-40kHz±3dB |
| Impedance | 4 ohms |
| Sensitivity | 98dB 2.83V/1m |
| Power req. | 50-300 watts |
| Woofer | (2) 8" (203mm) Aluminum |
| Mid | (2) 6.5" (165mm) Neodymium |
| Tweeter | (4) 1" (25mm) Beryllium |
| Grille | Black or White Cloth |
| PCB | Requires Framing |



2185 Park Place, Minden, NV 89423
Ph: 775.461.7500
www.jamesloudspeaker.com

THE APEX OF SOUND

20220107