

CUSTOMER: _____

One Signature Required

JOB NAME: _____

PO #: _____ QUOTE # _____

DATE: _____ QUANTITY: L _____ R _____

SHIP TO: _____

PLUMBING CONTRACTOR APPROVAL

____/____/____
DATE

GENERAL CONTRACTOR APPROVAL

____/____/____
DATE

ENGINEER APPROVAL

____/____/____
DATE

ARCHITECT APPROVAL

____/____/____
DATE

To complete your order, this document must be signed and emailed to the Centralized Customer Service Center.

quotes@americanbathgroup.com • 800.443.7269

STANDARD FEATURES

- Pre-leveled base
- Solid Surface
- 1 1/8" skirt
- Compliant when properly installed
- Center front drain outlet
- Integral front trench drain
- Return Flange
- 12" x 24" subway tile
- Slip resistant, textured bottom [ASTM F-462]

CONFIGURATION (handed by the seat)

- ☐ Shell reinforced for future accessory installation
 - Seat Wall ☐ LH ☐ RH
 - ☐ Optional vertical bar reinforcement (entry wall)
 - ☐ LH ☐ RH ☐ Both
- ☐ Fully configured — ANSI
 - Seat Wall (must choose one) ☐ LH ☐ RH
 - Includes one stainless steel 28" x 1 1/2" grab bar located on the side wall, one stainless steel 18 x 1 1/2" grab bar located on the back wall, stainless steel grate and cushioned, white, L-shaped fold-up seat, per ADA/ANSI guidelines. (std config)
 - ☐ Factory-installed plumbing options per ANSI requirements
 - ☐ Hand-held shower assembly, 30" slide bar and 60" hose
 - ☐ Pressure balancing mixing valve

CUSTOM OPTIONS (not avail. if ANSI configuration is selected)

- Handed by the seat ☐ LH ☐ RH
- ☐ Reinforced for future seat installation
- ☐ L-shaped fold-up seat
 - ☐ Cushioned white ☐ Phenolic teak ☐ Phenolic white
- Grab bars:
 - ☐ Horizontal L-shaped bars: 28" (side wall) and 18" (back wall)
 - ☐ Vertical bar 24" (entry wall) ☐ LH ☐ RH ☐ Both
- Grab Bar finish:
 - ☐ Stainless steel (1 1/2" dia.)
 - ☐ Powder-coated white (1 1/4" dia.)
- ☐ Factory-installed plumbing options per ANSI requirements
 - ☐ Hand-held shower assembly, 30" slide bar and 60" hose
 - ☐ Pressure balancing mixing valve
- Grate:
 - ☐ Stainless steel
 - ☐ White


Int. Dim.	48 W x 36 D x 76 5/8 H
Ext. Dim.	52 1/8 W x 38 1/8 D x 78 3/4 H
Skirt Ht.	1 1/8 skirt
Packaged Wt.	170 lbs.
Material	Solid Surface
Warranty	30-year warranty*

* See terms and conditions for details

inches

OPTIONAL ACCESSORIES (available for all models)

- ☐ Stainless steel vertical bar 24" x 1 1/2" (entry wall)
 - ☐ LH ☐ RH ☐ Both
- ☐ Large soap dish (12 1/2 W x 3 1/2 D x 1 1/2 H), shipped loose
- ☐ Small soap dish (7 W x 3 1/2 D x 1 1/2 H), shipped loose
- ☐ Curtain rod, shipped loose
- ☐ Shower curtain, shipped loose
- ☐ Brass drain
- Colors:
 - Standard ☐ White
 - ☐ Other (contact customer service for custom color options)
- ☐ Additional accessories: _____

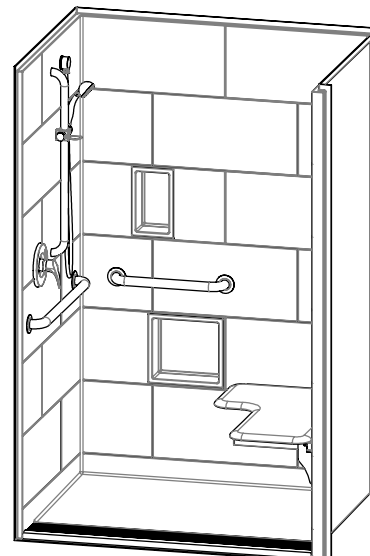

shown with optional soap dish


This unit is not suitable for behavioral health applications.



ANSI compliant when fully equipped
and installed according to guidelines.



This unit is not suitable
for behavioral health applications.

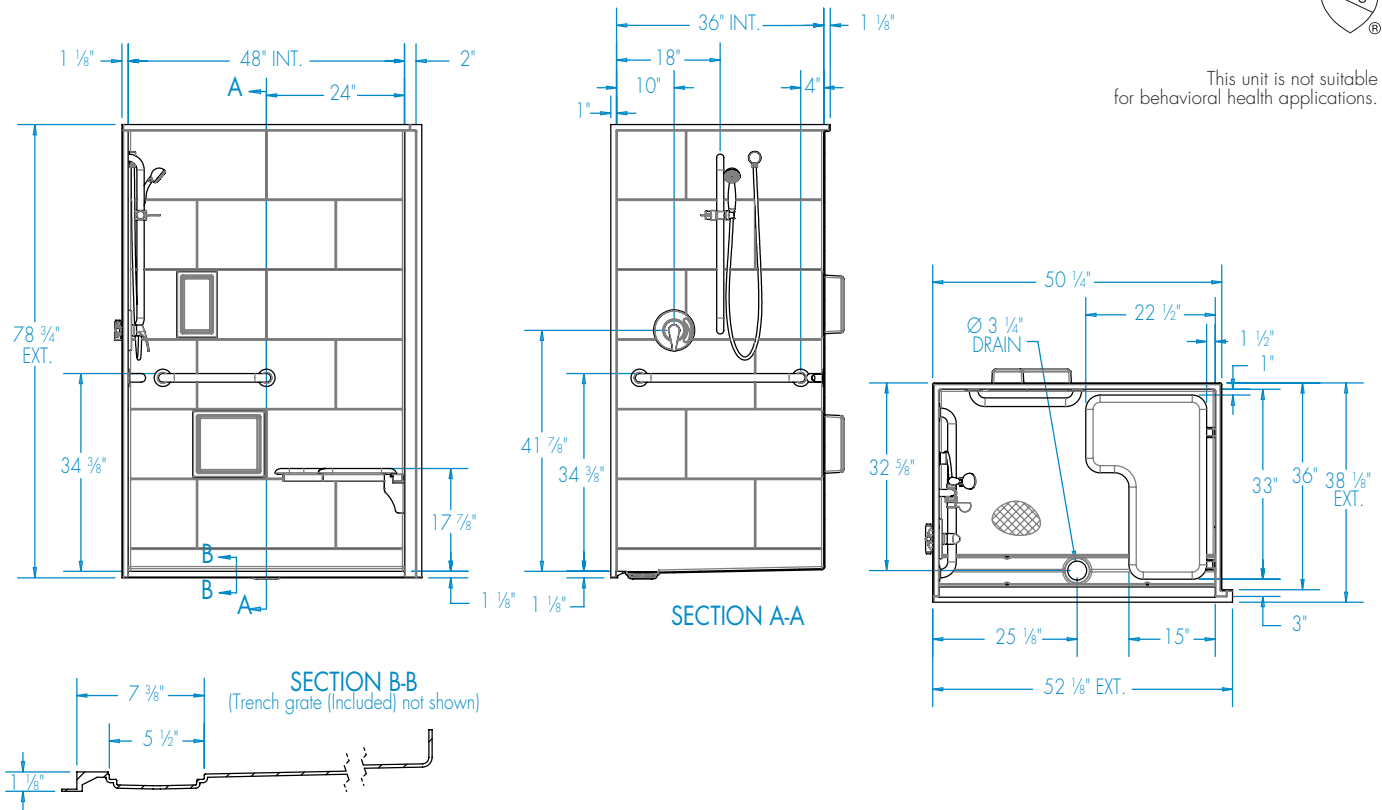

FEATURES lbs Dimensional Tolerance $\pm \frac{3}{16}$ ". Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.


Type and Model #	Material	Wall Finish	Pieces	Drain	Dam/Skirt Height	Net Wt.	Pkg. Wt.
Shower SST4836TR 1.125 RH RF	Solid Surface	Smooth tile	1	Center Front	1 1/8" skirt	160	170

DIMENSIONS

Specifications	inches
Width: Ext. / Int.	52 1/8 / 48
Depth: Ext. / Int.	38 1/8 / 36
Height: Ext. / Int.	78 3/4 / 76 5/8
Enclosure Opening:	48
Skirt Height:	1 1/8
Drain Rough-In (from Back Wall)	32 5/8
Drain Rough-In (from Side Wall)	25 1/8

FRAMING DIMENSIONS inches

Type	D1 Depth	D2 Depth (RF Side)	W Width	H Height	A	B	C
Alcove	38 1/8	36	50 1/2	—	Box Out	25 1/8	32 5/8

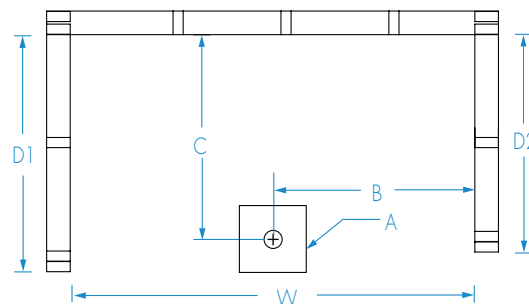

Note: Depth on recessed flange side should only be 36"
and opposite side should be 38 1/8"

EMAIL TO THE CENTRALIZED CUSTOMER SERVICE CENTER: quotes@americanbathgroup.com