




BE MKII DATA SHEET

BE806 MKII TECHNICAL SPECIFICATIONS

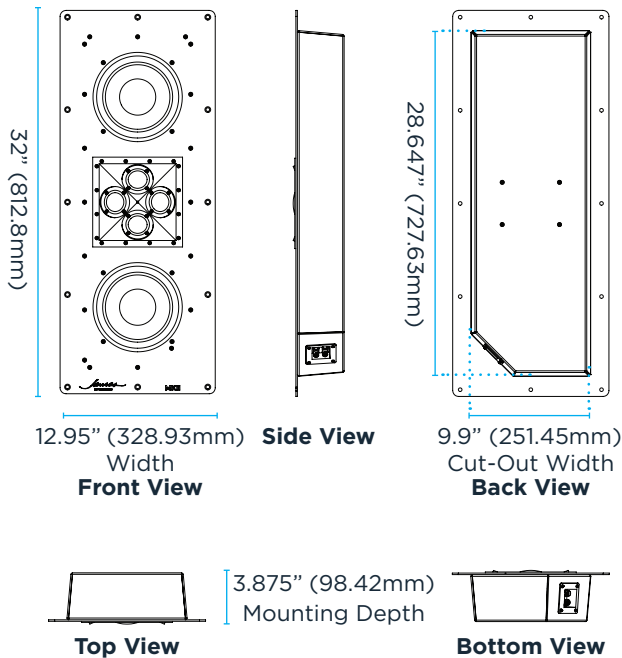

SKU	BE806 MKII 60641 - Each
Tweeter	(4) 1" (25mm) Beryllium
Woofers	(2) 8" (203mm) Aluminum
Frequency Response	45Hz-40kHz +/-3dB
Nominal Impedance	4 ohms
Recommended Power	50 watts minimum; 150 watts maximum
Sensitivity (2.83V/1m)	96dB SPL
Crossover	2-way
Average Coverage Angle	160 Degrees Horizontal; 38 Degrees Vertical
Enclosure	Aircraft Marine Grade Aluminum
Grille Finishes	Black, White Cloth, or White Paintable Grille
Cut-Out Dims (WxH)	9.9" x 28.647" (251.45mm x 727.63mm)
Required Mounting Depth (D)	3.875" (98.42mm)
Overall Dimensions (WxHxD)	12.95" x 32" x 4" (328.93mm x 812.8mm x 101.6mm)
Grille Dimensions (WxH)	13.26" x 32.31" (336.8mm x 820.67mm)
Accessories	Requires Preconstruction Board (PCB)

BE806 MKII IN-WALL ACCESSORIES

BE806 PB
Pre Construction Board (PCB) | 60425

James by Sonance warrants this product to the original purchaser to be free from defects in materials and workmanship under normal use. **Limited Lifetime Warranty** applies to indoor installations. **Limited Five (5) Year Warranty** applies to outdoor or moisture-dense environments (e.g., spas, showers, saunas). **Grille is warranted for five (5) years for both indoor and outdoor use.** Warranty valid only for products purchased from authorized dealers and installed per manufacturer guidelines. Excludes damage from misuse, accidents, modifications, improper installation, or normal wear. For details or claims, visit sonance.com/company/contact

©2025 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com.

JAMES by SONANCE • 2185 Park Place • Minden, NV 89423 • USA • PHONE: (775) 461-7500 • www.jamesloudspeaker.com

10.13.2025