



Features

- Available in field-switchable 5CCT (2700K | 3000K | 3500K | 4000K | 5000K)
- High color rendering index of 90+ CRI
- 120V AC input
- Low power consumption not exceeding 16.5W
- Surface mount ultra-low profile
- 35,000 hour rated life
- cETLus listed for dry locations
- 32° pivoting lens


Available Sizes

10" | 16" | 24" | 32"

Available CCT



Available Finishes



Dimming Options

- TRIAC (10-100%)

Listing / Ratings




LED 5 Complete

This adaptable, adjustable fixture allows for a wide range of illuminated area regardless of installation location. The fixture produces up to 1350 lumens and is field-switchable to five different color temperatures. With a pivot angle of $\pm 32^\circ$ the LED 5 Complete promises ultimate flexibility without compromising performance.

Technical Information

Series	5LCS
Input Voltage	120V AC
CCT	5CCT (2700K 3000K 3500K 4000K 5000K)
CRI	90+
Wattage	Up to 16.5W
Lumens	Up to 1050Lm
Beam Angle	120°
Max Run	150W
Dimmable	10-100% (TRIAC)
Mounting	Surface
Rating	cETLus Listed, Dry Locations
Rated Life	35,000 hrs


*Lumens listed based on 4000K CCT setting

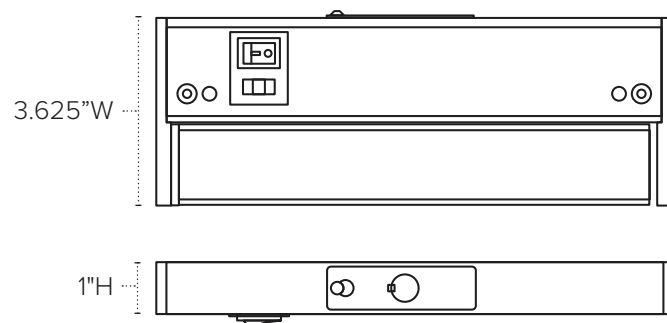

LED 5 Complete



LED 5 Complete - White

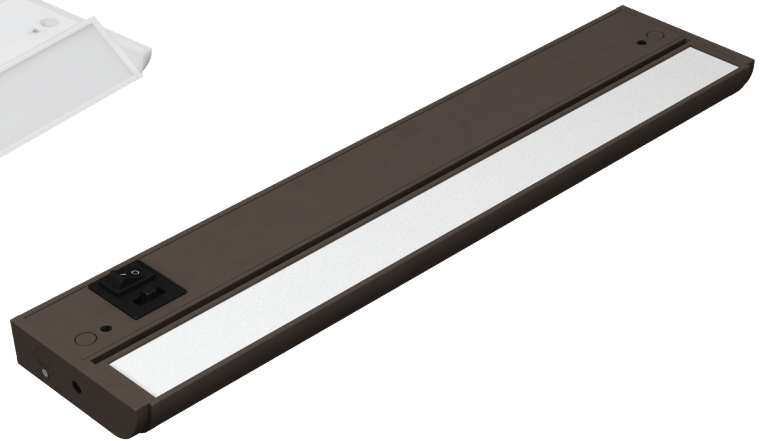5LCS-10-5CCT-WH (10" | 7W | 385Lm)**5LCS-16-5CCT-WH** (16" | 11W | 620Lm)**5LCS-24-5CCT-WH** (24" | 15W | 925Lm)**5LCS-32-5CCT-WH** (32" | 16.5W | 1050Lm)

LED 5 Complete - Bronze

5LCS-10-5CCT-DB (10" | 7W | 385Lm)**5LCS-16-5CCT-DB** (16" | 11W | 620Lm)**5LCS-24-5CCT-DB** (24" | 15W | 925Lm)**5LCS-32-5CCT-DB** (32" | 16.5W | 1050Lm)

LED 5 Complete Accessories



Hardwire Junction Box

5LCS-BOX-WH (White)**5LCS-BOX-DB** (Dark Bronze)

120V AC Power Cord (6ft)

5LCS-PC6-WH (White)**5LCS-PC6-BK** (Black)

Linking Cables

5LCS-EX6-WH (6" | White)**5LCS-EX12-WH** (12" | White)**5LCS-EX6-BK** (6" | Black)**5LCS-EX12-BK** (12" | Black)