



APPLICATIONS

- Bars and Cafes
- Restaurants
- Retail stores
- Fitness centres
- Hotels and Education Sites
- Corporate
- House of Worship


Networked/ PoE controller for Blaze Audio PowerZone™ Connect amplifiers

Wall-S1 controller

Any PowerZone™ Connect amplifier can be controlled remotely with the Wall -S1 wall-mounted networked / PoE controller. It is simple to install, set-up, configure, and customize for any installed system to manage any sound zone in a location. With PIN code protection for system security and access, you can change source and manage volume in a matter of seconds.

- Connect up to 8 x Wall -S1 per PowerZone™ Connect amplifier
- Allocate any Wall-S1 to any sound zone in the PowerZone™ Control web app
- Easily change source or manage volume in a zone with pre-set minimum and maximum levels
- PoE for easy network pairing, real-time device syncing with system and controller power supply
- PIN code protection for both basic and advanced access, including system shutdown when leaving a location
- Intuitive menu for easy installation and system set-up, also easy handover to users
- Customisable screen and backlight allowing brightness and colour control
- Danish-designed, high-performance polymer material with a touch-friendly matte finish and concealed screws
- Available in EU and US versions, standard white RAL9003 and black RAL9005
- Works with Blaze Audio PowerZone™ Connect amplifiers


SYSTEM EXAMPLE

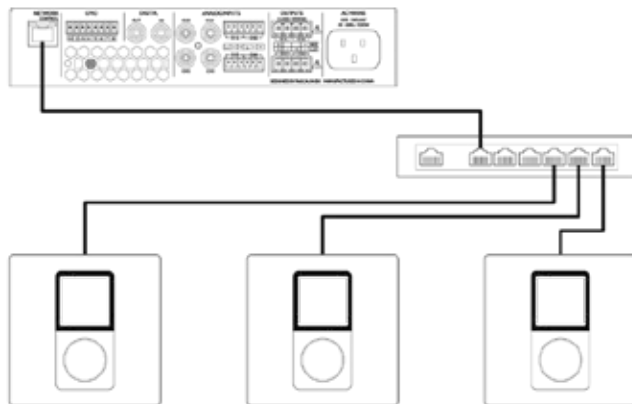

PRODUCT DATA AND TECHNICAL SPECIFICATIONS TABLE

Model	W-EU		B-EU	W-US		B-US
Amplifier Compatibility	Blaze Audio PowerZone™ Connect series					
Colour	White (RAL9003)		Black (RAL9005)	White (RAL9003)		Black (RAL9005)
External Dimensions (H x W)	86.79 x 86.79 mm (3.42 x 3.42 in)			115.1 x 70.6 mm (4.53 x 2.78 in)		
External Dimensions, Depth [From rear side of mounting plate to outer side of shield box]	23.7 mm (0.93 in)			23.1 mm (0.91 in)		
External Dimensions, Depth [From tip of rotary encoder dial to outer side of shield box]	42.8 mm (1.68 in)			42.8 mm (1.68 in)		
Mounting Holes, Distance (Center to Center)	60 mm (2.36 in)			83.5 mm (3.29 in)		
Weight	120g (4.2oz.)			120g (4.2oz.)		
Operating Temperature Range	0-40°C (32-104°F)					
Display Screen Dimension (excluding black border)	27.72 mm x 27.72 mm					
Display Screen Area (excluding black border)	768.4 sq mm					
Display Screen Resolution	240 x 240 pixels					
Display Screen Type	RGB, Transmissive / Normally Black					
Display Screen Material	High gloss polished transparent acrylic					
Exterior & Mechanical Parts Material	Plastic (ABS-PC)					
Base Construction & Shield Material	Pre-galvanized steel					
Power Consumption	PoE Class 1 / 3.84 W max					
Power Supply	Power to the RJ45 ethernet port on the rear of device using a category 5e cable (or faster STP) with the use of a standard PoE switch, or PoE injector					
Standby Modes	6 settings available: 30 secs, 2 mins, 5 mins, 15 mins, 30 mins, 60 mins					
Connection & Data Protocol	RJ45, Blaze Audio proprietary over CAT 5e (or faster STP)					
Maximum Cable Length (CAT 5e)	100m (328ft)					
IP Rating	IP 30					
Warranty Period	2 Years					

DIMENSIONS WALL-S1 EU

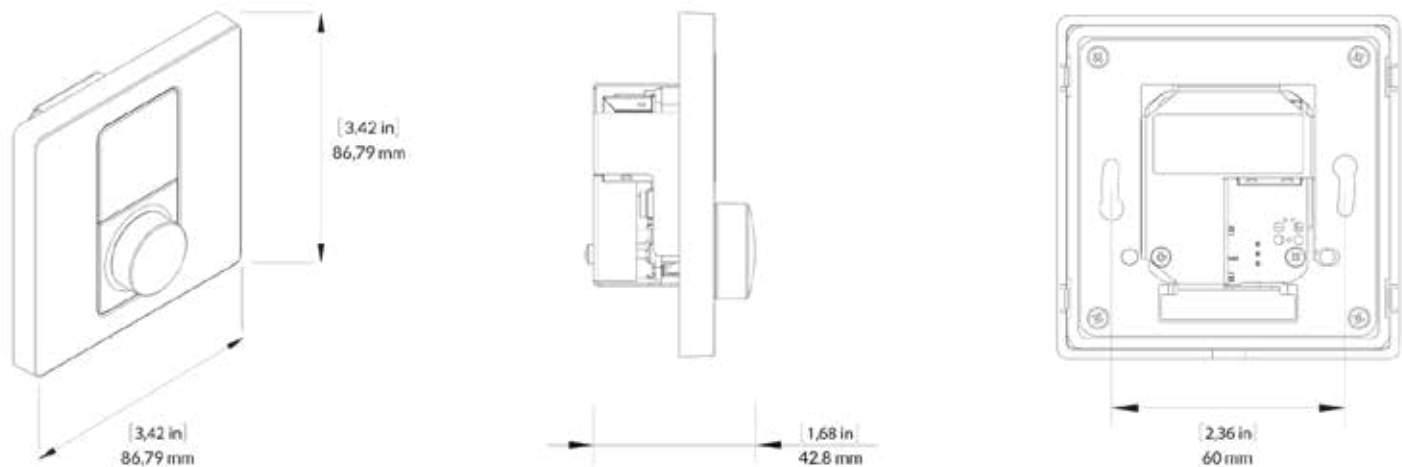

DIMENSIONS WALL-S1 US

