

## For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

### B1-\*\*A/B2-\*\*A/B3-\*\*A Speedi Plumb® PLUS Braided Faucet Connector - Compression Inlet

**Use:** For use in potable water distribution systems in accessible locations only.

**Design Features:**


- **Engineered polymer braided** fibers bend freely without kinking or crimping.
- **Reinforced PVC inner hose** provides added durability.
- **Rubber washers** provide a large pliable sealing surface and to help maintain a water-tight connection.
- **No-lead brass material** meets compliance for safe drinking.

**Operating Specifications:**

**Temperature:** 40°- 160°F, intermittent to 180°F

**Pressure:** 125 PSI maximum

**Tubing Diameter:** 0.300" ID (0.550" OD)

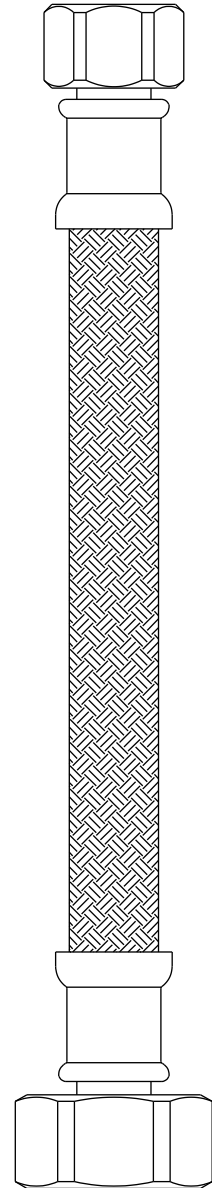

#### CONNECTOR MATERIAL SPECIFICATIONS

<b>Inner Hose</b>	<i>Reinforced PVC</i>
<b>Braiding</b>	<i>PVC coated yarn</i>
<b>Barb</b>	<i>Brass</i>
<b>Ferrule</b>	<i>Stainless steel</i>
<b>Nut</b>	<i>Brass, plated</i>
<b>Washer</b>	<i>Rubber</i>


*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.*

400.335 B1/B2/B3 SPP Braided Faucet Connector - Compression Inlet REV 10.25

**BrassCraft**®

© 2025 BrassCraft Manufacturing Company

# B1-\*\*A/B2-\*\*A/B3-\*\*A Speedi Plumb® PLUS Braided Faucet Connector - Compression Inlet

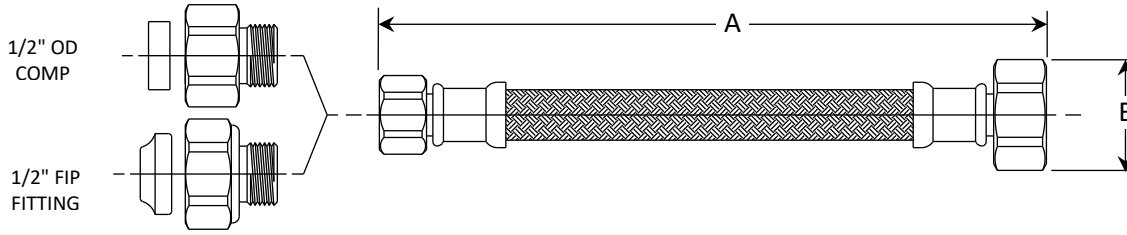

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
B1-12	12.0 / 13.0	1.02
B1-16	16.0 / 17.0	1.02
B1-20	20.0 / 21.0	1.02
B1-24	24.0 / 25.0	1.02
B1-30	30.0 / 31.0	1.02
B1-36	36.0 / 37.0	1.02
B1-48	48.0 / 49.0	1.02

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
B1-60	60.0 / 61.0	1.02
B2-12	12.0 / 13.0	1.02
B2-20	20.0 / 21.0	1.02
B3-12	12.0 / 13.0	1.02
B3-16	16.0 / 17.0	1.02
B3-20	20.0 / 21.0	1.02
B3-30	30.0 / 31.0	1.02

### Part Listing:

- B1-12A F      3/8" Compression x 1/2" FIP\* x 12" Length
- B1-16A F      3/8" Compression x 1/2" FIP\* x 16" Length
- B1-20A F      3/8" Compression x 1/2" FIP\* x 20" Length
- B1-20A P8      3/8" Compression x 1/2" FIP\* x 20" Length, Bagged, 8-pack
- B1-20AU D      3/8" Compression x 1/2" FIP\* x 20" Length Connector with 1/2" OD Compression and 1/2" Iron Pipe Valve Adaptors, and Washers, Carded
- B1-20AMB F      3/8" Compression x 1/2" FIP\* x 20" Length, Matte Black Finish
- B1-24A F      3/8" Compression x 1/2" FIP\* x 24" Length
- B1-30A F      3/8" Compression x 1/2" FIP\* x 30" Length
- B1-30AMB F      3/8" Compression x 1/2" FIP\* x 30" Length, Matte Black Finish
- B1-36A F      3/8" Compression x 1/2" FIP\* x 36" Length
- B1-48A F      3/8" Compression x 1/2" FIP\* x 48" Length
- B1-60A F      3/8" Compression x 1/2" FIP\* x 60" Length
- B2-12A F      7/16" Compression x 1/2" FIP\* x 12" Length
- B2-20A F      7/16" Compression x 1/2" FIP\* x 20" Length
- B3-12A F      1/2" Compression x 1/2" FIP\* x 12" Length
- B3-16A F      1/2" Compression x 1/2" FIP\* x 16" Length
- B3-20A F      1/2" Compression x 1/2" FIP\* x 20" Length
- B3-30A F      1/2" Compression x 1/2" FIP\* x 30" Length

\*1/2" FIP also fits 7/16" rubber slip nut

### Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6
- IAPMO listed to NSF/ANSI 372 for Low-Lead Compliance
- IAPMO listed to NSF/ANSI/CAN 61



*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.*

**BrassCraft®**