

Café™ 19 Cu. Ft. Built-in Capable Single Door All Freezer, ENERGY STAR®

C A F É

CME19LBYZS1, CME19LB4ZW2, CME19LB3ZD1



CME19LB4ZW2
Matte White
with Brushed Bronze
handles

ALSO AVAILABLE IN



CME19LBYZS1
Stainless Steel
with Brushed Stainless
handles



CME19LB3ZD1
Matte Black
with Brushed Stainless
handles

Custom Look with Built-in Flexibility

Complete your kitchen with the look of a built-in freezer using a coordinating trim kit. Pair the all freezer with the matching all refrigerator for a dramatic side-by-side statement or install each separately to suit your space. Available in Stainless Steel, Matte White or Matte Black to complement your personal style.

Designed for the Way You Entertain

Enjoy 19 cu. ft. of spacious freezer storage with room for frozen favorites, entertaining essentials and everything you need to host with confidence. Pair with the matching all refrigerator for an impressive 38 cu. ft. of combined storage.

Unmatched Visibility Meets Undeniable Style

The bright, uniform glow of the LED Light Wall spans the back wall of the freezer, providing enhanced visibility across every shelf so it's easy to find what you need.

Ice Storage, Your Way

Personalize your freezer with the FlexIce™ Drawer. An adjustable divider lets you choose from five ice capacity settings, ranging from 10 to 18 lbs., so you can balance ice storage with space for the foods you keep on hand.

Integrated Icemaker

An integrated icemaker keeps fresh ice within reach, so you're always prepared for everything from everyday refreshments to entertaining guests.

Frozen Favorites Within Easy Reach

Four full-extension storage drawers glide open smoothly and feature dedicated LED lighting, keeping frozen favorites organized and within easy reach.

Flexible Storage for Every Occasion

Reconfigure adjustable glass shelves to accommodate everything from stacked frozen pizzas to oversized food packages, so your freezer is ready for everyday meals and effortless entertaining.

Designed Around Your Style

Extra-large adjustable door bins with elegant copper accents adjust to accommodate larger frozen foods, family-sized packages, and everyday essentials, so everything has its place.

Connected Convenience at Your Fingertips

Control and monitor your freezer from anywhere with the SmarthQ™ app. Receive door-open and high-temperature alerts, adjust temperature settings, customize LED Light Wall brightness and more.

Thoughtfully Integrated Controls

Sleek internal controls let you adjust temperatures and activate Turbo Freeze while maintaining the freezer's clean, streamlined design.



Café™ 19 Cu. Ft. Built-in Capable Single Door All Freezer, ENERGY STAR® - 79" Height Installation

CME19LBYZS1, CME19LB4ZW2, CME19LB3ZD1

SINGLE INSTALLATION



SINGLE DOOR ALL FREEZER
CME19LBYZS1/4ZW2/3ZD1

TRIM KIT
UKPSF79ZSS
CKPSF79ZW2
CKPSF79ZD1

DUAL INSTALLATION



SINGLE DOOR ALL FREEZER
CME19LBYZS1/4ZW2/3ZD1

SINGLE DOOR ALL REFRIGERATOR
CLE19RBYZS1/4ZW2/3ZD1

TRIM KIT
UKPDF79ZSS
CKPDF79ZW2
CKPDF79ZD1

ADDITIONAL ACCESSORIES



CXSS2H2PMBZ
Brushed Bronze
2 handles
(Standard on Matte White)



CXSS2H2PMSS
Brushed Stainless
2 handles
(Standard on Stainless Steel and Matte Black)



CXSS2H2PMBT
Brushed Black
2 handles



CXSS2H2PMCU
Brushed Copper
2 handles



CXSS2H2PMCG
Brushed Brass
2 handles




CXSS2H2PMFB
Flat Black
2 handles

Café™ 19 Cu. Ft. Built-in Capable Single Door All Freezer, ENERGY STAR® - 79" Height Installation

CME19LBYZS1, CME19LB4ZW2, CME19LB3ZD1


PRODUCT DIMENSIONS

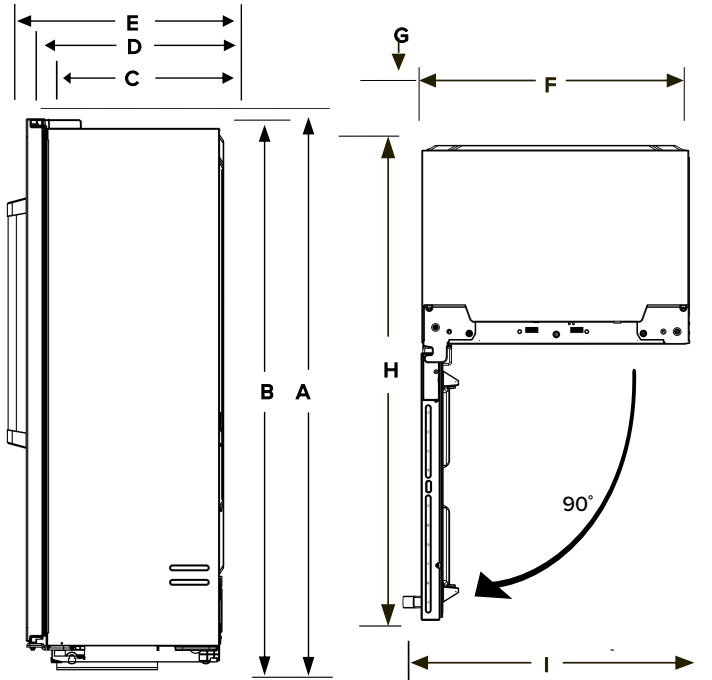

Product Dimensions


Inches

Overall height (A)	74.76
Height to top of hinge cover (B)	74.65
Depth without door, without handle (C)	24.21
Depth with door, without handle (D)	26.93
Overall depth with door and handle (E)	29.50
Overall width (F)	32.80
Clearance from side of case to adjacent wall with door open 90° (G)	2.8
Total depth with door open 90° (H)	58.11
Width with door open 90°, including handle (I)	35.47
Dual installation - clearance between cases (J)	0.49
Dual installation - clearance between doors (K)	0.37

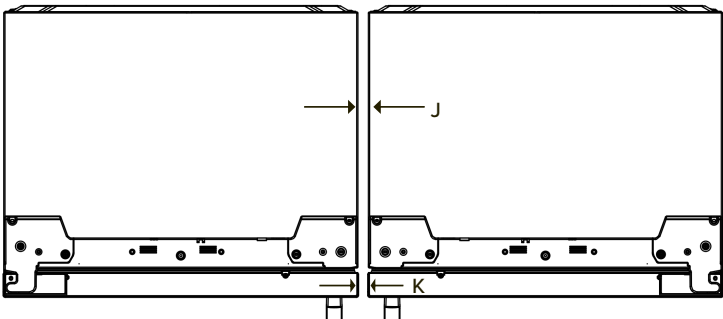


CABINET CUTOUT DIMENSIONS

Single Installation

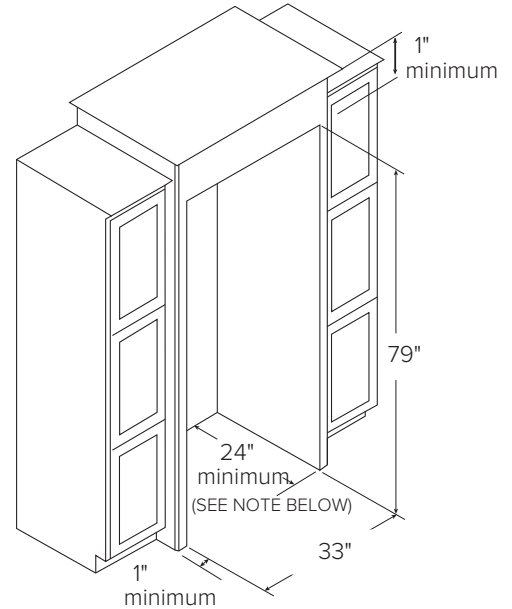

Dual Installation

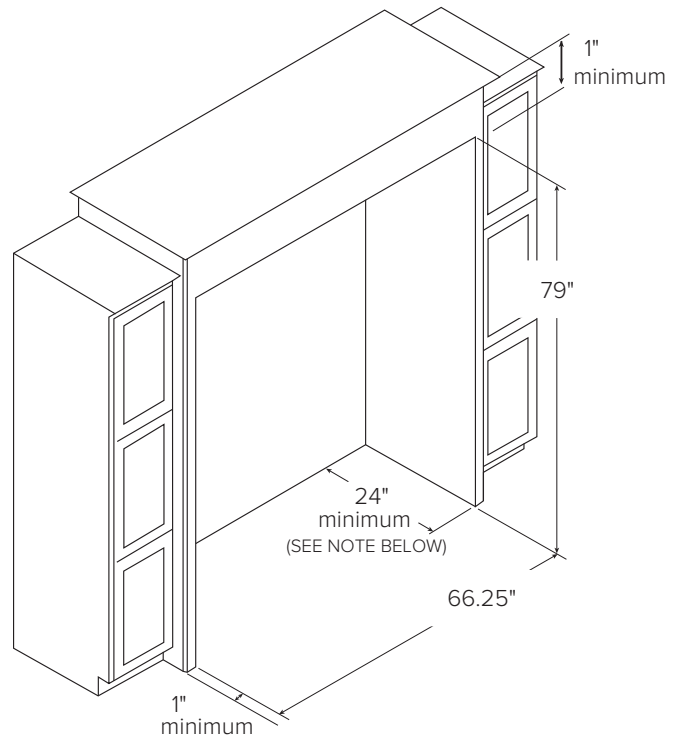

IMPORTANT:

- 24" depth opening requires a recessed electrical outlet and shutoff water valve. A minimum depth of 25.25" is recommended for new construction.
- Dual installation requires two separate dedicated grounding-type wall outlets for the freezer and refrigerator.

Café™ 19 Cu. Ft. Built-in Capable Single Door All Freezer, ENERGY STAR® - 84" Height Installation

CME19LBYZS1, CME19LB4ZW2, CME19LB3ZD1

SINGLE INSTALLATION



SINGLE DOOR ALL FREEZER CME19LBYZS1/4ZW2/3ZD1

TRIM KIT
UKPSF84ZSS
CKPSF84ZW2
CKPSF84ZD1

DUAL INSTALLATION



SINGLE DOOR ALL FREEZER CME19LBYZS1/4ZW2/3ZD1

SINGLE DOOR ALL REFRIGERATOR CLE19RBYZS1/4ZW2/3ZD1

TRIM KIT
UKPDF84ZSS
CKPDF84ZW2
CKPDF84ZD1

ADDITIONAL ACCESSORIES



CXSS2H2PMBZ
Brushed Bronze
2 handles
(Standard on Matte White)



CXSS2H2PMSS
Brushed Stainless
2 handles
(Standard on Stainless Steel and Matte Black)



CXSS2H2PMBT
Brushed Black
2 handles



CXSS2H2PMCU
Brushed Copper
2 handles



CXSS2H2PMCG
Brushed Brass
2 handles




CXSS2H2PMFB
Flat Black
2 handles

Café™ 19 Cu. Ft. Built-in Capable Single Door All Freezer, ENERGY STAR® - 84" Height Installation

CME19LBYZS1, CME19LB4ZW2, CME19LB3ZD1


PRODUCT DIMENSIONS

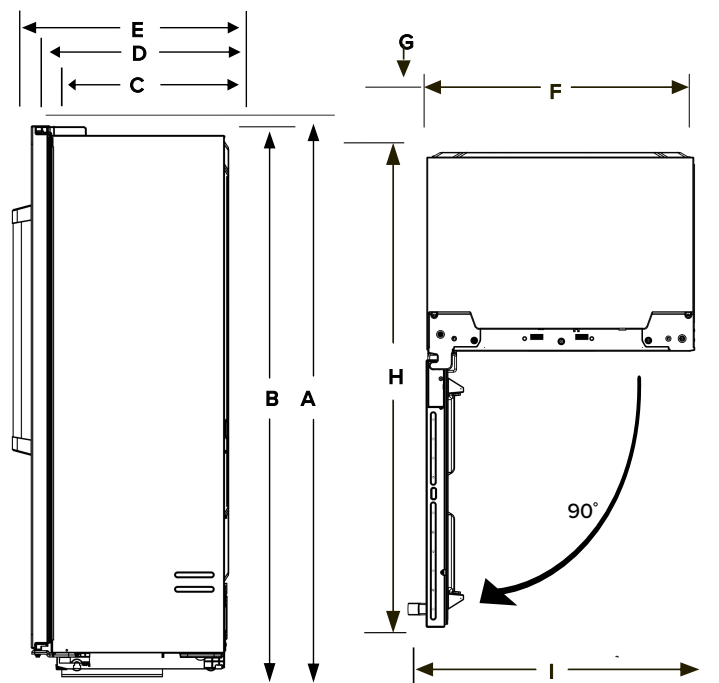

Product Dimensions


Inches

Overall height (A)	74.76
Height to top of hinge cover (B)	74.65
Depth without door, without handle (C)	24.21
Depth with door, without handle (D)	26.93
Overall depth with door and handle (E)	29.50
Overall width (F)	32.80
Clearance from side of case to adjacent wall with door open 90° (G)	2.8
Total depth with door open 90° (H)	58.11
Width with door open 90°, including handle (I)	35.47
Dual installation - clearance between cases (J)	0.49
Dual installation - clearance between doors (K)	0.37

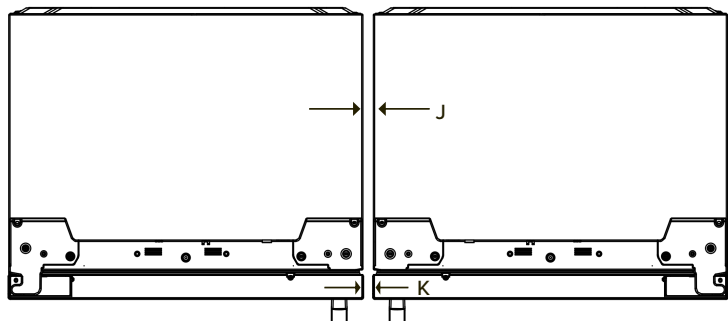


CABINET CUTOUT DIMENSIONS

Single Installation

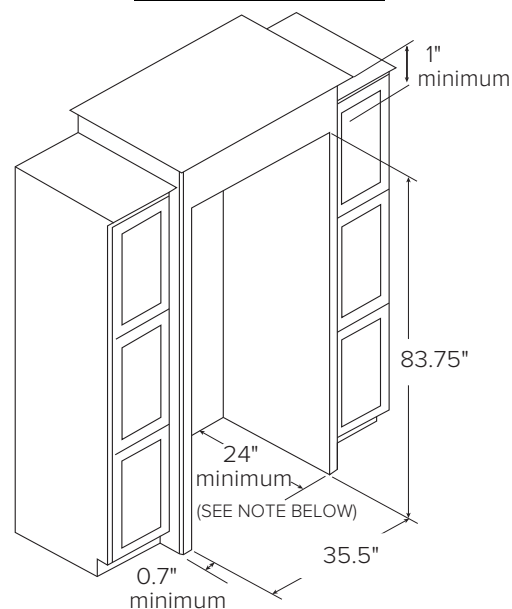

Dual Installation

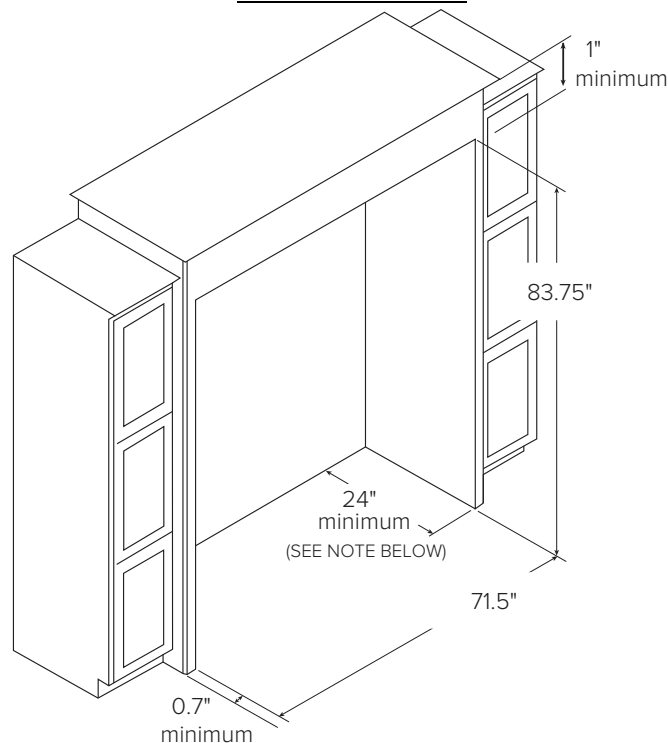

IMPORTANT:

1. 24" depth opening requires a recessed electrical outlet and shutoff water valve. A minimum depth of 25.25" is recommended for new construction.
2. Dual installation requires two separate dedicated grounding-type wall outlets for the freezer and refrigerator.

Café™ 19 Cu. Ft. Built-in Capable Single Door All Freezer, ENERGY STAR® - 75" Height Installation

CME19LBYZS1, CME19LB4ZW2, CME19LB3ZD1

DUAL INSTALLATION



SINGLE DOOR ALL FREEZER

CME19LBYZS1/4ZW2/3ZD1

SINGLE DOOR ALL REFRIGERATOR

CLE19RBYZS1/4ZW2/3ZD1

TRIM KIT

UKPDF75ZSS

CKPDF75ZW2

CKPDF75ZD1

ADDITIONAL ACCESSORIES



CXSS2H2PMBZ
Brushed Bronze
2 handles
(Standard on Matte White)



CXSS2H2PMSS
Brushed Stainless
2 handles
(Standard on Stainless
Steel and Matte Black)



CXSS2H2PMBT
Brushed Black
2 handles



CXSS2H2PMCU
Brushed Copper
2 handles



CXSS2H2PMCG
Brushed Brass
2 handles




CXSS2H2PMFB
Flat Black
2 handles

Café™ 19 Cu. Ft. Built-in Capable Single Door
All Freezer, ENERGY STAR® - 75" Height Installation

CME19LBYZS1, CME19LB4ZW2, CME19LB3ZD1


PRODUCT DIMENSIONS

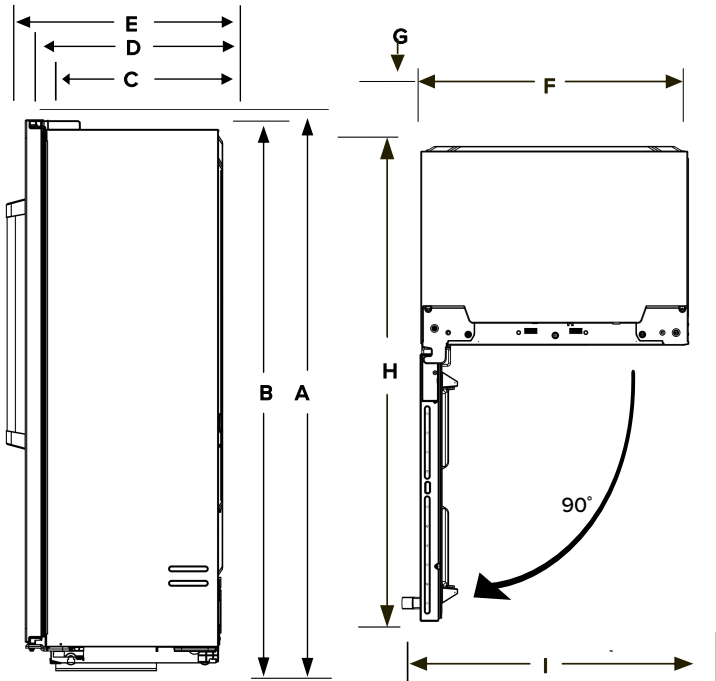

Product Dimensions


Inches

Overall height (A)	74.76
Height to top of hinge cover (B)	74.65
Depth without door, without handle (C)	24.21
Depth with door, without handle (D)	26.93
Overall depth with door and handle (E)	29.50
Overall width (F)	32.80
Clearance from side of case to adjacent wall with door open 90° (G)	2.8
Total depth with door open 90° (H)	58.11
Width with door open 90°, including handle (I)	35.47
Dual installation - clearance between cases (J)	0.49
Dual installation - clearance between doors (K)	0.37

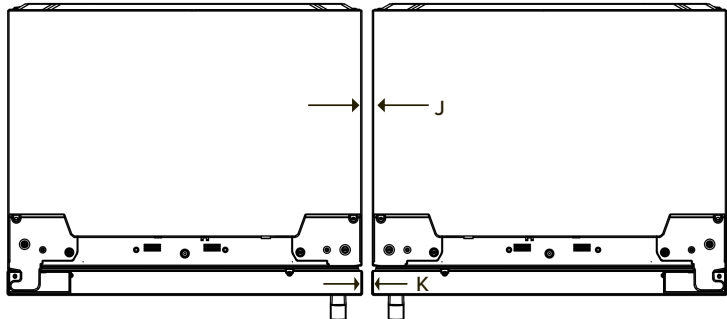

CABINET CUTOUT DIMENSIONS

Dual Installation


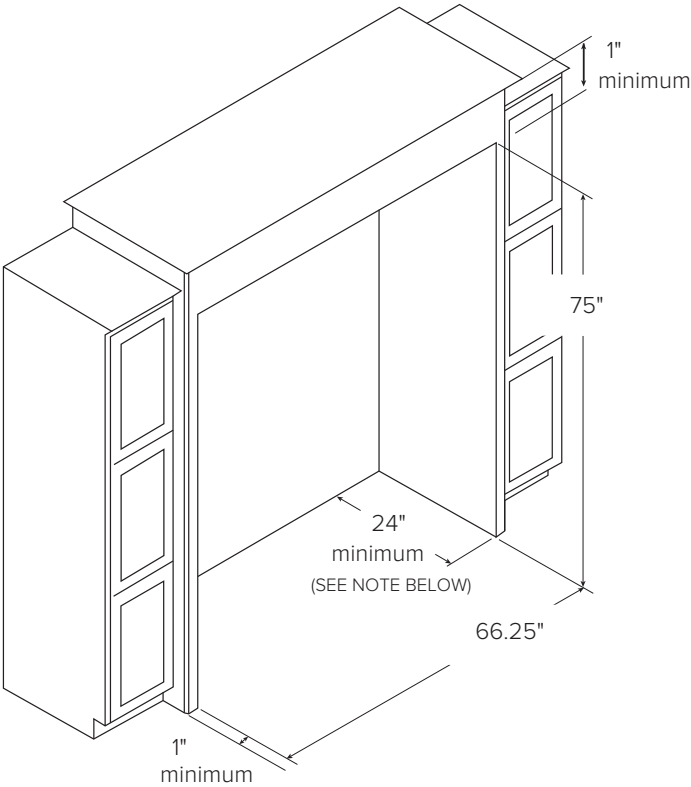


IMPORTANT:

1. 24" depth opening requires a recessed electrical outlet and shutoff water valve. A minimum depth of 25.25" is recommended for new construction.
2. Dual installation requires two separate dedicated grounding-type wall outlets for the freezer and refrigerator.

Café™ 19 Cu. Ft. Built-in Capable Single Door
All Freezer, ENERGY STAR® - Freestanding

CME19LBYZS1, CME19LB4ZW2, CME19LB3ZD1

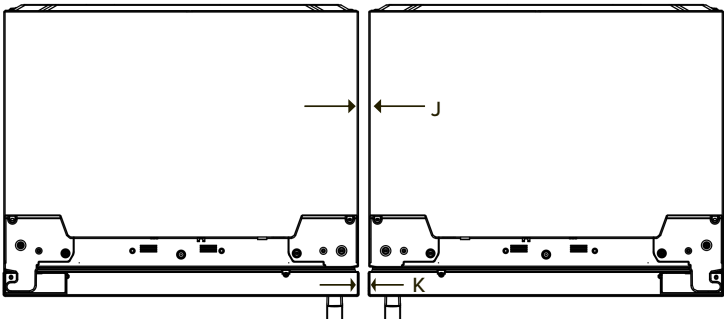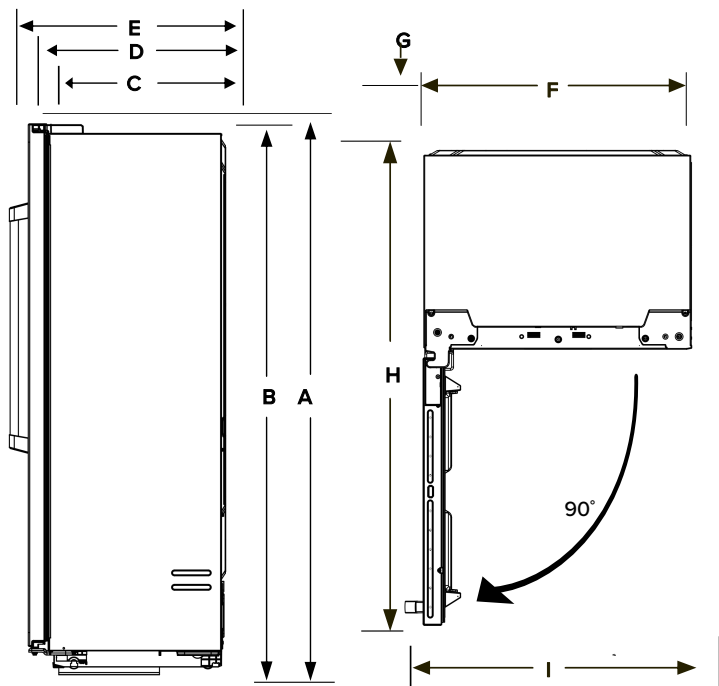

Product Dimensions	Inches
Overall height (A)	72.89
Height to top of hinge cover (B)	72.78
Depth without door, without handle (C)	24.21
Depth with door, without handle (D)	26.93
Overall depth with door and handle (E)	29.50
Overall width (F)	32.80
Clearance from side of case to adjacent wall with door open 90° (G)	2.8
Total depth with door open 90° (H)	58.11
Width with door open 90°, including handle (I)	35.47
Dual installation - clearance between cases (J)	0.49
Dual installation - clearance between doors (K)	0.37

Overall Product Dimensions (WxHxD)

32.8" x 72.89" x 29.50"

Air Clearances	Inches
Each Side	0.16
Top	0.31
Back	0.83

Allow additional space for any necessary leveling adjustments.

IMPORTANT:

The product ships configured for built-in installation with the leveling system installed. For freestanding installation, replace the leveling system and bottom air dividers using the included parts.

ADDITIONAL ACCESSORIES

					
CXSS2H2PMBZ Brushed Bronze 2 handles (Standard on Matte White)	CXSS2H2PMSS Brushed Stainless 2 handles (Standard on Stainless Steel and Matte Black)	CXSS2H2PMBT Brushed Black 2 handles	CXSS2H2PMCU Brushed Copper 2 handles	CXSS2H2PMCG Brushed Brass 2 handles	CXSS2H2PMFB Flat Black 2 handles