

IRD2

Flux Capacitor IR Dongle


Just Add
Power
AV over IP Solutions

Converts RS232 into an IR signal

The Just Add Power Flux Capacitor IR Dongle provides IR control of endpoint devices through the Just Add Power Omega and Ultra product lines. Conveniently powered through Decoder USB port.

Connects to RS232 port on a Decoder or Encoder


Use the Flux Capacitor IR Dongle combined with Just Add Power drivers to control all of your IR devices over a single IP connection. Each IR Dongle becomes an additional IR port on the control system.

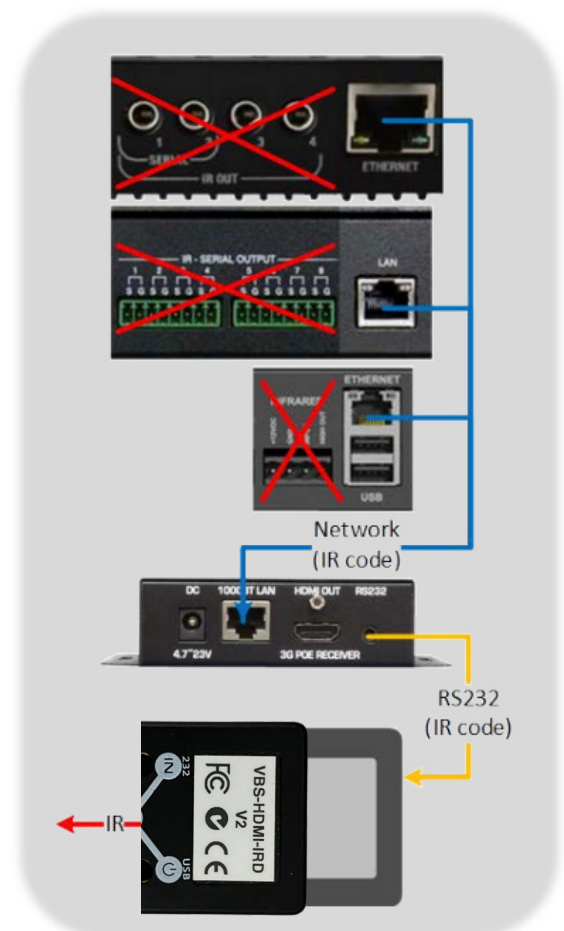

IRD2

Flux Capacitor IR Dongle

All measurements in millimeters (mm)

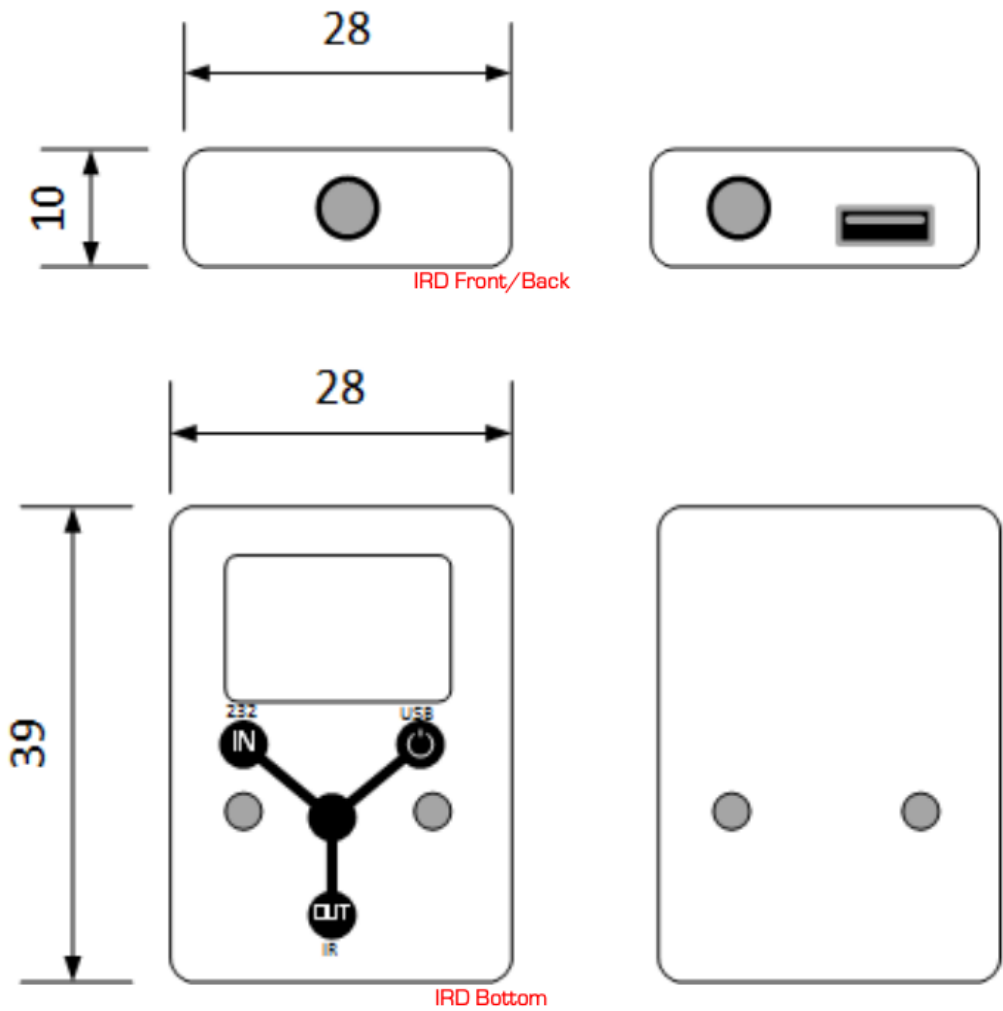

Specifications

Compliance	RoHS/FCC/CE	Ports	USB micro (power) 3.5mm (IR Out) 3.5mm (Serial In)
Overall Dimensions & Weight	39 x 28 x 10 mm 1.5" x 1.1 x 0.4" inch 28 g / 1 oz	Power Supply (not included)	DC5V, 0.5A minimum USB micro
Operating Temp	0-60 °C / 32-140 °F		