

ASSEMBLY INSTRUCTION

CHAIR

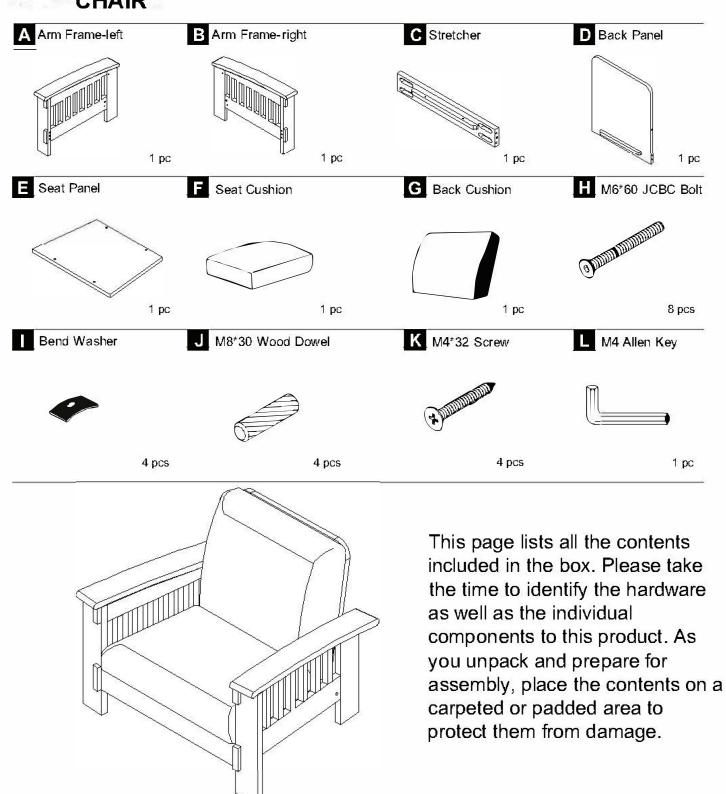

9912-1 CHAIR

Fix stretcher (C) with arm frame (A+B) .Insert wood dowels (J) into the middle hole of stretcher (C) ,use bend washer (I) and bolt (H) on up and down holes ,turn the allen key (L) to lock them.

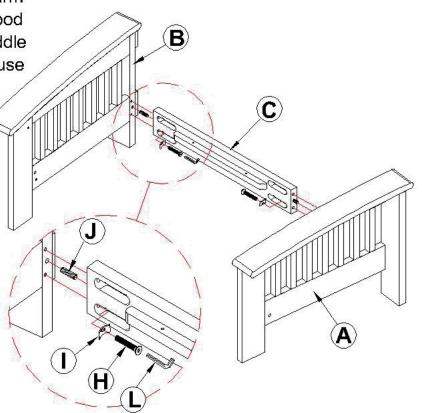


Fix back panel (D) with arm frame (A+B) .


Insert wood dowels into the middle holes on both side of back panel (D) ,put bolt (H) through the side holes of arm frame (A+B) ,use allen key (L) to lock them with back panel (D) .

9912-1 CHAIR

Put on seat panel (E) as shown, use screw (K) to fix.

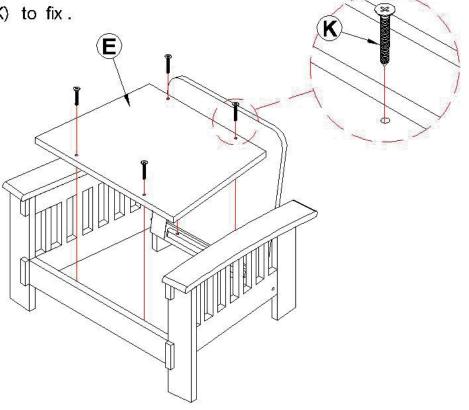

Put on seat cushion (F) and back cushion (G).

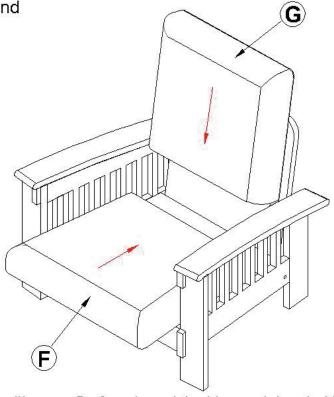

c I e a n i n g & c a r e Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.