

EXL5

LED Exit Sign

Product Description

NICOR EXL5 is housed in an ABS, corrosion-resistant enclosure making it a durable option for wet location applications. High output LEDs deliver an indirect, evenly illuminated exit sign with exceptional light distribution and a maintenance-free nickel-cadmium battery for long life. The EXL5 Series offers flexible installation for surface ceiling, wall or end mount options along with field adjustable chevrons for universal configuration based on your application's directional needs.

Construction

- Injection molded thermoplastic ABS housing
- Injection molded clear polycarbonate face

Optical System

- Uniform lighting with specially designed plastic diffuser to prevent shadowing

Electrical

- Operating temperature rating of 5°F to 104°F (-15°C – 40°C)
- Maintenance-free NiCad battery provides 90-minute emergency operation, recharges in 24 hours
- 120/277VAC Dual voltage operation, 60Hz input
- Fully-illuminated 6" letter height with 3/4" stroke
- LED indicator light & self-test push button switch

LED

- LED light engine provides consistently bright, even EXIT legend illumination with red or green LEDs

Finish

- White unpainted thermoplastic housing
- Available with either red or green lettering

Installation

- Surface ceiling, wall or end mount installation options
- Universal mounting plate with EZ quick connect
- Field-installable, removable chevron directional indicators for all configurations
- Additional faceplate provided for single or double face installation

Compliance

- UL 924
- Listed for wet locations
- UL-94-V-0 Flame rating - flame retardant construction

Warranty

- 1-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

PRODUCT INFORMATION


Input Voltage:	120/277 VAC
Power Draw:	Red Model: 2.9 W (120 VAC), 3.6 W (277 VAC) Green Model: 2.74 W (120 VAC), 3.5 W (277 VAC)
Emergency Battery:	90 Minutes

Project _____

Catalog _____

Type _____

Date _____

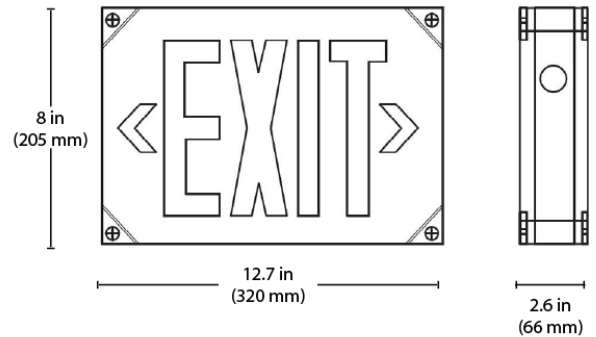

Ordering Information

Example: EXL51UNVWHR2

Series	Version	Voltage	Housing Color	Letter Color	Number of Faces
EXL5	1 (1.0)	UNV (120/277VAC)	WH (White)	G (Green) R (Red)	2 (Single and Double)

Specifications and dimensions subject to change without notice