




SYMMONS® ActivSense™ Power Supply Box




SF278

Location:

10 - Device Power Supply Box


Specification Submittal

Model Numbers	Feature Highlights
☐ SF278 <i>120V Cable 4.5 feet long Hard wired 15 Amp circuit.</i>	• 120V Cable 4.5 feet long • Hard wired 15 Amp circuit. • (QTY:10) 12 Volt Outputs , 4.2A • Any combination of devices • 10 devices maximum • IP55 Rated • (SF277 not included)
Compatible Devices <i>(sold as separate line items)</i>	
☐ S6960B <i>Origins ActiveSense™ Sensor Lavatory Faucet</i>	Technical Data • Model <i>Switching adapter</i> • AC Input Voltage <i>88-264 VAC</i> • Input Frequency <i>47-63HZ</i> • Output Voltage <i>12VDC</i>
☐ SD6960BL <i>Origins ActiveSense™ Sensor Soap Dispenser</i>	
☐ S6430B <i>Sereno ActiveSense™ Sensor Lavatory Faucet</i>	Compliance -UL60950-1, EN60950-1, IEC60950-1, CE Mark 
☐ SD6430BL <i>Sereno ActiveSense™ Sensor Soap Dispenser</i>	
☐ S6360B <i>Duro ActiveSense™ Sensor Lavatory Faucet</i>	Warranty Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information. 
☐ SD6360BL <i>Duro ActiveSense™ Sensor Soap Dispenser</i>	
☐ S6350B <i>Dia ActiveSense™ Sensor Lavatory Faucet</i>	
☐ SD6350BL <i>Dia ActiveSense™ Sensor Soap Dispenser</i>	
Options <i>(sold as separate line items)</i>	
☐ SF277 <i>9 foot Junction box cable</i>	
☐ SD017 <i>4-1/2 foot extension cable</i>	
☐ SD018 <i>4" male to male connector (required for use of SD6350B Faucet only)</i>	


Architectural/ Engineering Specification

Symmons ActiveSense™ Switching Power Supply Box with (10) 12V outputs 120-240 VAC 4.5 foot long hard wired input capable of powering any combination of ActiveSense™ products, rated per IP55. Options (sold separately) SF277 9 foot output cable, 4.5 foot extension cable and 4" male to male connector required for SD6350B faucets.

Power Layout

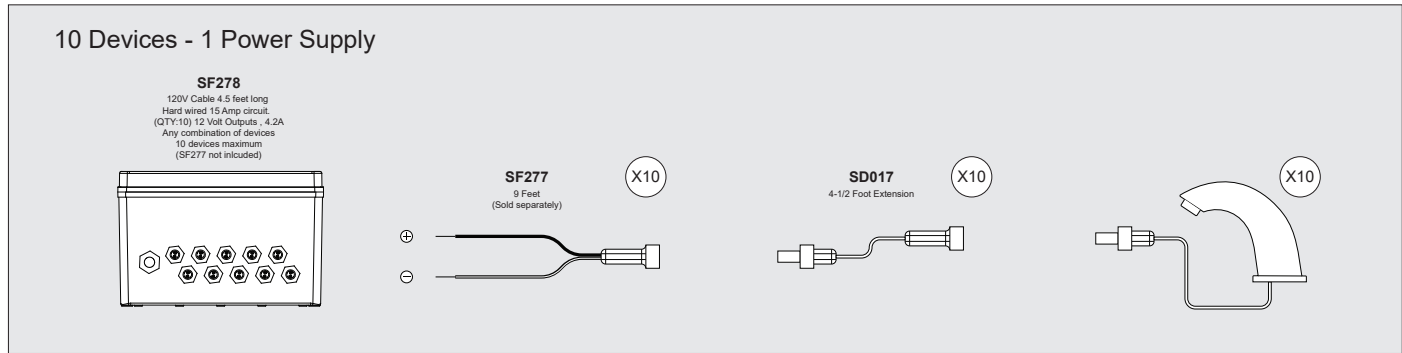

Dimensions

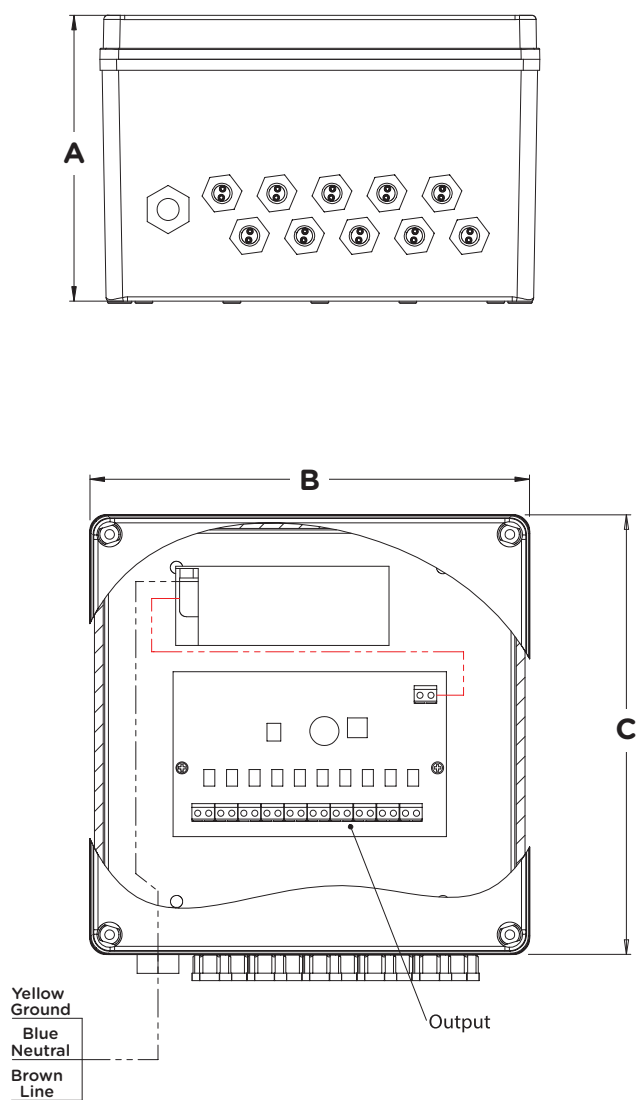

Measurements	
A	5-1/8" , 130 mm
B	7-7/8" , 200 mm
C	7-7/8" , 200 mm

Note: Dimensions subject to change without notice.