



VITREOUS CHINA

TOILET  
**21-918**

LAVATORIES

TOILETS

BIDETS / URINALS

CAST IRON



## MAXWELL® 1.28 ErgoHeight™, Elongated Toilet

12" Rough-in

### Features:

- 1.28 gpf/4.8 Lpf high efficiency two-piece toilet
- Elongated ErgoHeight™ bowl
- Dual-fed siphon jet
- Pilot fill valve
- 3" flush valve
- 2" glazed trapway
- Color matched front tank lever
- Optional insulated non-sweating tank (28-992)
- Optional right-handed trip lever (28-990-97)
- Available in White, Bone and Biscuit
- 2 bolt caps
- ADA Compliant



### Dimensions:

Height ..... 30 1/8"  
Width ..... 17 1/2"  
Depth ..... 28 1/2"  
Rough-in ..... 12"  
Water Surface from Rim ..... 6 1/2"  
Trapway ..... 2"  
Water Surface ..... 8 7/8" x 7 3/8"  
Water Seal ..... 2 1/4"  
Shipping Weight ..... 85.5 lbs



**Specifications:** Bowl—#21-928 Front Bowl  
Seat not included

Tank—#28-990

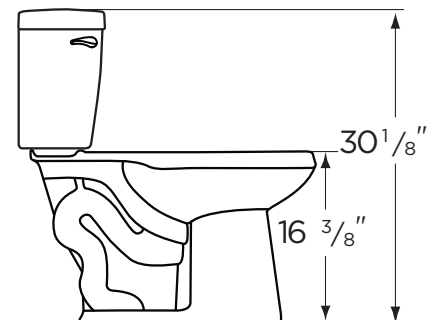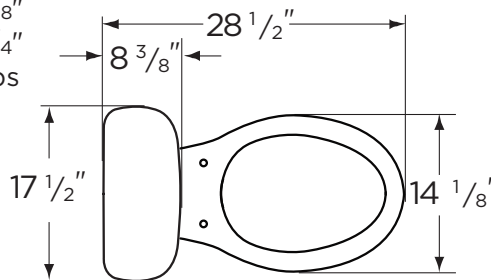

THIS FIXTURE QUALIFIES  
ACCORDING TO ASME TEST  
PROCEDURES AS A HIGH  
EFFICIENCY WATER CLOSET WITH  
AN AVERAGE CONSUMPTION OF  
1.28 gpf (4.8 Lpf) OR LESS.

HIGH EFFICIENCY TOILET  
**HET**



[www.gerberonline.com](http://www.gerberonline.com)


|                    |  |
|--------------------|--|
| Job Name           |  |
| Date               |  |
| Model Specified    |  |
| Quantity           |  |
| Customer           |  |
| Contractor         |  |
| Architect/engineer |  |



# 1.28 gpf (4.8 Lpf) MAXWELL® 1.28 TOILET

21-918

17" High Elongated, 12" Rough-in  
(Bowl 21-928 with Tank 28-990)

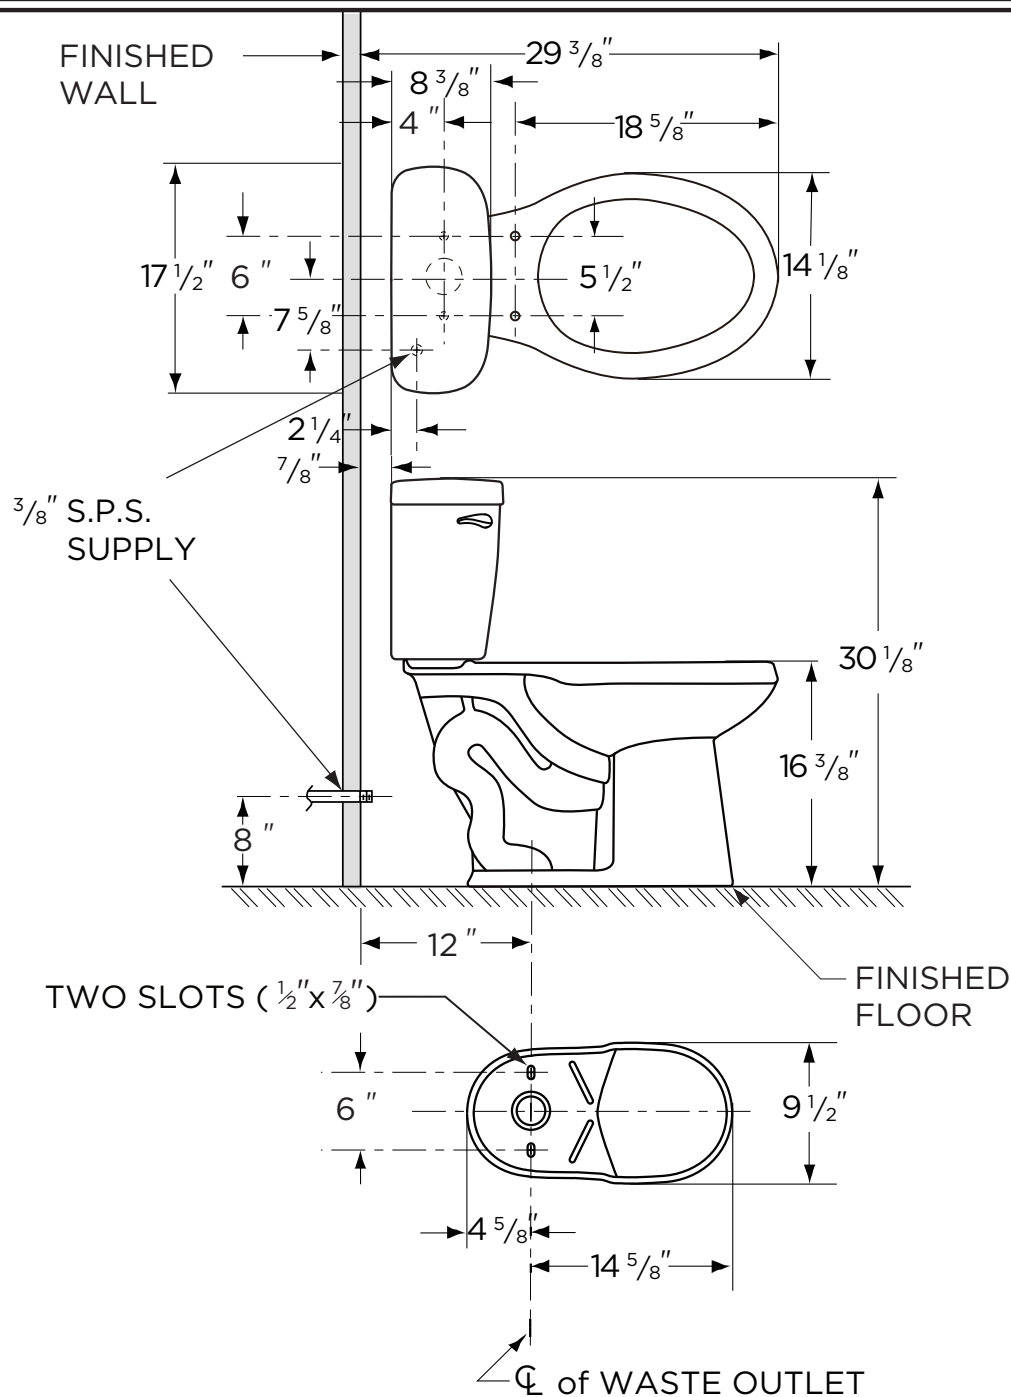

## NOTES:

All dimensions are in inches.

Illustrations may not be drawn to scale.

## IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME Standard A 112.19.2.

THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS A HIGH EFFICIENCY WATER CLOSET WITH AN AVERAGE CONSUMPTION OF 1.28 gpf (4.8 Lpf) OR LESS.