



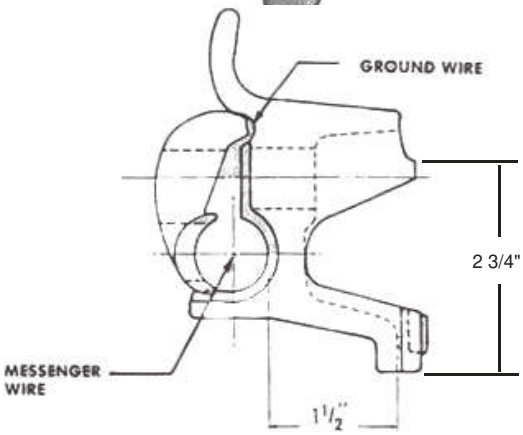

Aerial Cable, Messenger


Features
- Hook for supporting messenger during stringing operation
- Body tapped for 5/8" diameter bolt
- Independent clamping - messenger remains clamped if pole shrinkage occurs
- Teeth on legs to resist movement

Material
Aluminum alloy

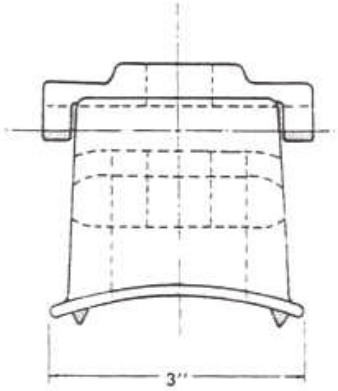

Catalog Number	Mounting Bolts	Ground Wire Dia. (in)	Messenger Range (in)	Weight /100 (lbs)
MBA-72	5/8"	0.12 - 0.25	0.25 - 0.72	65




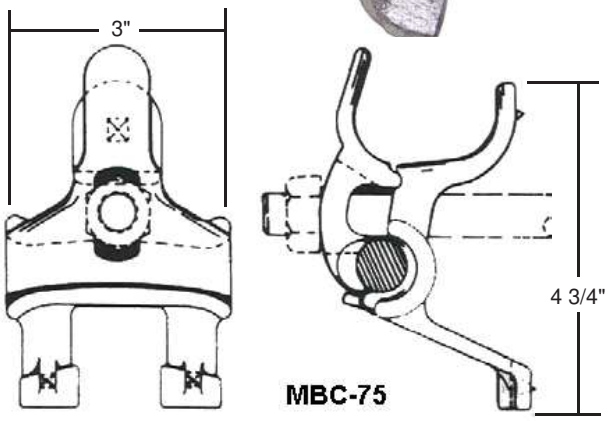

Aerial Cable, Messenger

Features
- Curved groove for more cable support
- Lip on bottom groove kicks upward to support cable during installation
- Hook to support cable during stringing operation
- Independent clamping - messenger remains clamped if pole shrinkage occurs

Material
Ductile iron hot dip galvanized

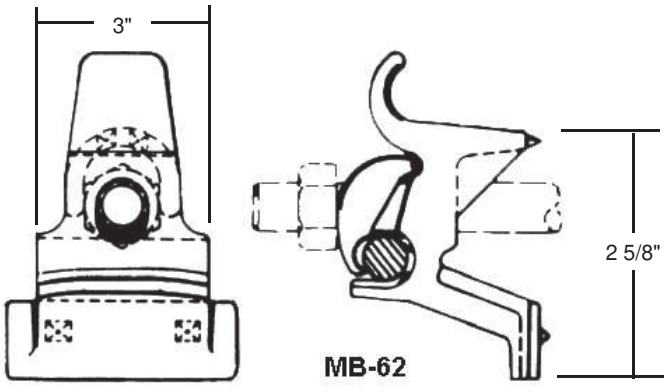

Catalog Number	Mounting Bolts	Pole Clearance	Ground Wire Dia. (in)	Messenger Range (in)	Weight /100 (lbs)
MBC - 75	5/8"	1 1/2"	--	0.35 - 0.75	175
MB-62	5/8"	1 1/2"	0.16 - 0.25	0.25 - 0.61	200


© Copyright 2010 MacLean Power Systems
Issued: May 2010
Supercedes: n/a

11411 Addison Avenue, Franklin Park, IL 60131
T: 847.455.0014 F: 847.455.0029
www.macleanpower.com

Aerial Cable, Messenger

Features
- Curved messenger groove for better support
- Body tapped for 5/8” - 11 UNC thru bolt
- Hook for supporting messenger during stringing operation
- Messenger groove lip kicks upward to support cable during installation
- Independent clamping- messenger remains tight if pole shrinkage occurs
- Cable range of ground wire is 0.16” to 0.25”

Material
Aluminum Alloy

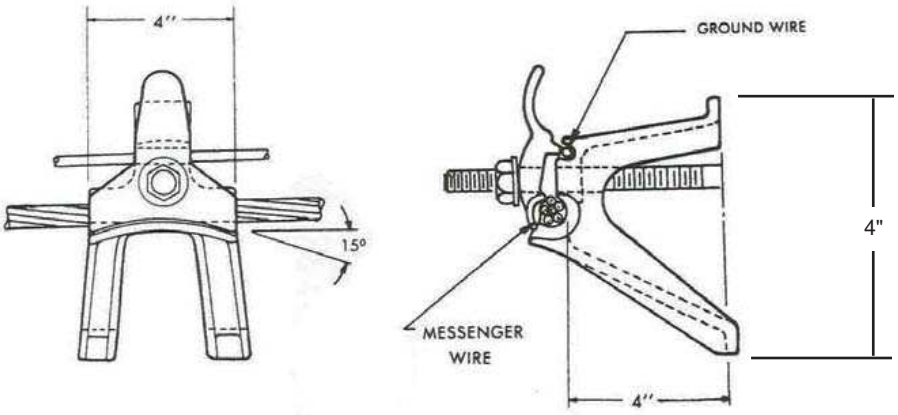


Catalog Number	Mounting Bolts	Ground Wire Range (in)	Messenger Range (in)	Weight /100 (lbs)
MBCA-72-4	5/8”	0.16 - 0.25	0.25 - 0.72	167

Aerial Cable, Messenger

Features
- May be used to support fiber optic cable
- Can be mounted on round or flat surfaces, on a pole, or on a standoff bracket
- Clamping range 0.398” - 0.56”
- Mounting hole is 11/16”

Material
Body and keeper: Aluminum alloy
Hardware: Steel hot dip galvanized

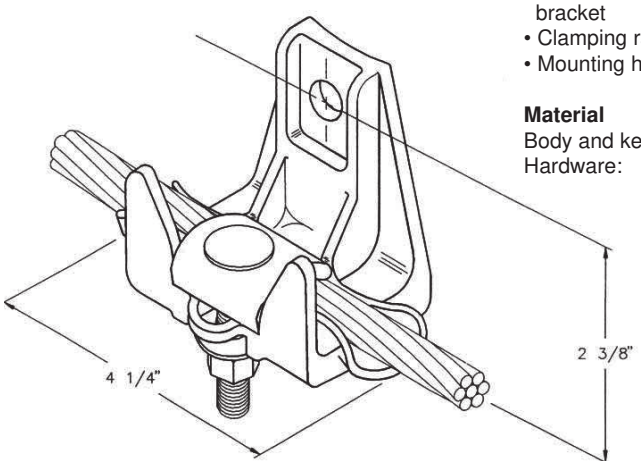

Catalog Number	Weight /100 (lbs)
MSBC-56	119

© Copyright 2010 MacLean Power Systems
Issued: May 2010
Supercedes: n/a


11411 Addison Avenue, Franklin Park, IL 60131
T: 847.455.0014 F: 847.455.0029
www.macleanpower.com



Aerial Cable, Messenger

Features
- Small economical clamp for light duty construction
- A stringing finger is included on the clamping plate
- The back of the clamp body is recessed to fit over nut
- A second nut secures the clamp plate and assures positive, independent clamping action regardless of wood shrinkage

Material
Ductile iron hot dip galvanized

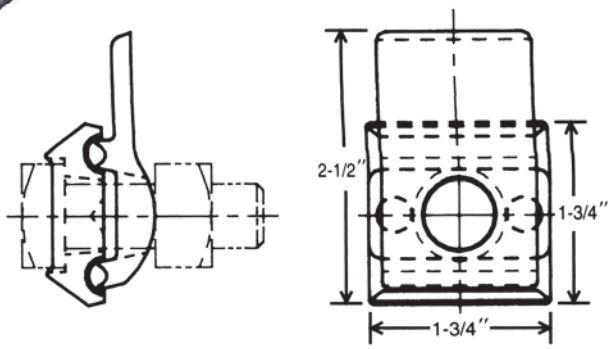


Catalog Number	Mounting Bolts	Ground Wire Dia	Messenger Range (in)	Weight /100 (lbs)
PA166A	5/8”	0.162 - 0.257	0.162 - 0.257	46

Aerial Cable, Messenger

Features
- For attaching medium to heavy duty cable on both angle and tangent construction
- Two separate clamping plate bolts allow clamping action to be independent of wood shrinkage

Material
Ductile iron hot dip galvanized

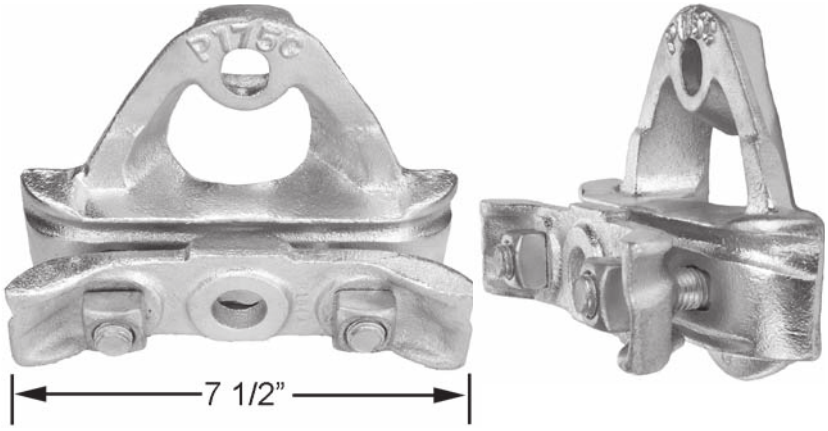


Catalog Number	Mounting Bolts	Pole Clearance	Messenger Range (in)	Clamp Bolts	Weight /100 (lbs)
PA175C	3/4”	2”	0.43 - 0.63	5/8 - 2 1/2”	600

Notes:
Two clamp bolts

© Copyright 2010 MacLean Power Systems
Issued: May 2010
Supercedes: n/a


11411 Addison Avenue, Franklin Park, IL 60131
T: 847.455.0014 F: 847.455.0029
www.macleanpower.com

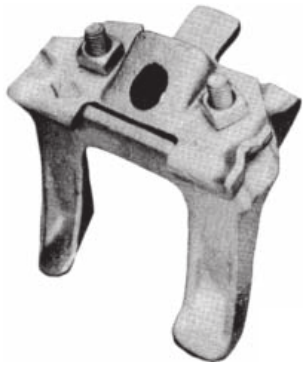


Aerial Cable, Messenger

Features
- Nut Retainer - cast in body of clamp permits independent mounting of body; also permits through bolt to act as an extra independent clamping bolt
- Belled Groove Ends - allow better angle, as well as tangent installations
- Spurs - provide better stability
- Independent Clamping - not affected by pole shrinkage

Material
Ductile iron hot dip galvanized

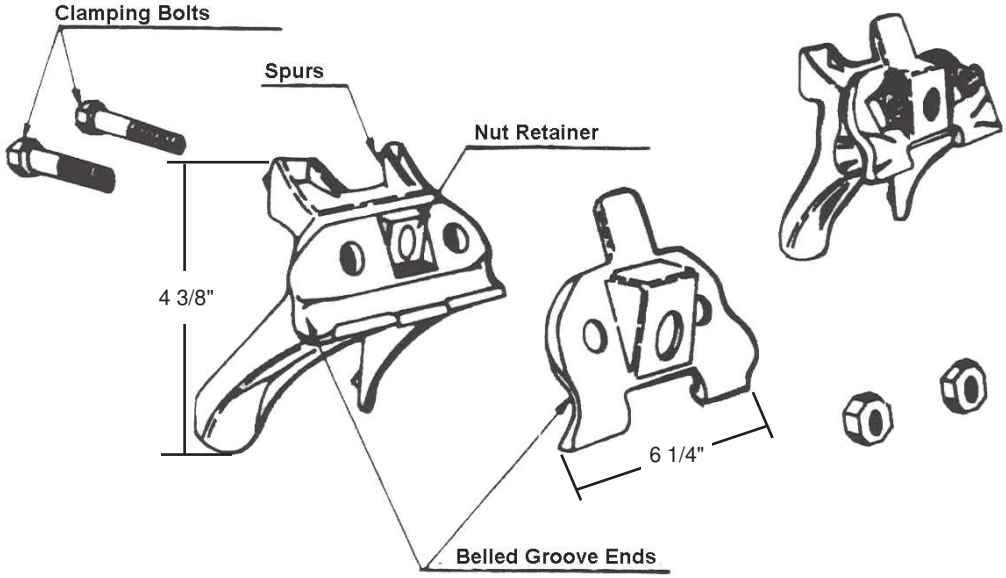

Catalog Number	Mounting Bolts	Pole Clearance (in)	Ground Wire Dia. Range	Messenger Range (in)	Clamp Length	Weight /100 (lbs)
MBXH-82	3/4"	3	0.125" - 0.184"	3/8 - 3/4	5"	700

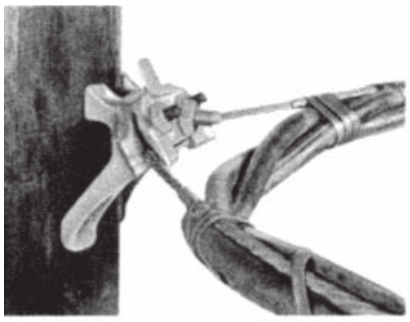


Aerial Cable, Messenger

This messenger aerial cable clamp is designed for attaching medium size cable and triplex to a pole.

Features
- 6" long curved clamping groove to conform to sag of span
- Generously belled groove ends for angles
- Teeth on feet resist downslotting
- Smooth area for stringing operation
- Special nut retaining feature around body mounting bolt hole


Material
Ductile iron hot dip galvanized

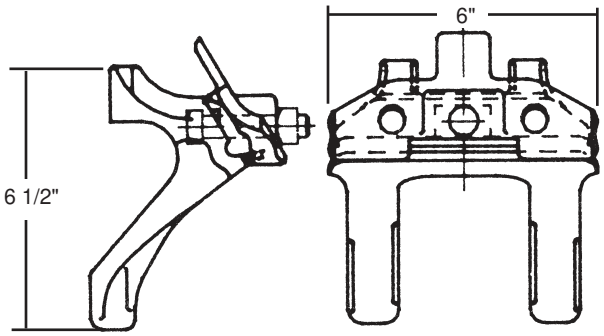


Catalog Number	Mounting Bolt Dia.	Pole Clearance	Ground Wire Dia. Range	Messenger Range (in)	Clamp Bolt Dia.	Weight /100 (lbs)
PA192A	5/8"	2 1/4"	0.125" - 0.184"	0.310 - 0.500	(2) 1/2 x 2"	499

© Copyright 2010 MacLean Power Systems
Issued: May 2010
Supercedes: n/a

11411 Addison Avenue, Franklin Park, IL 60131
T: 847.455.0014 F: 847.455.0029
www.macleanpower.com

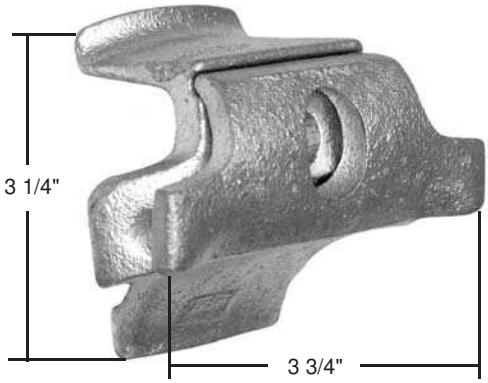

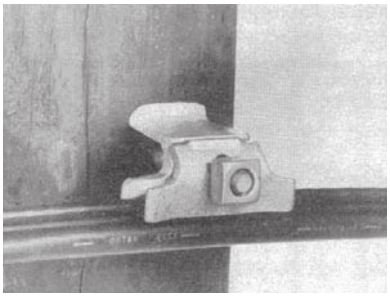

Aerial Cable, Messenger

Features
- Accommodates inside or outside angles from 10˚ to 35˚
- Accommodates 0.25” - .50” bare messenger or 0.25” insulated messenger
- Clamp groove ends are generously rounded to prevent damage to bare or insulated messenger
- The inner pole side clamp section is tapped to accept a 5/8” diameter bolt and includes a curved surface with spurs to penetrate into the pole and provide a stable installation.
- The design provides a 1 - 5/8” clearance from the surface of the pole to the cable and 3 - 3/4” clamping surface length with a back base height of 3 1/4".

Material
Ductile iron hot dip galvanized


Catalog Number	Weight /100 (lbs)
PA288	144




Aerial Cable, Messenger

Features
- Hook to support cable during stringing operation
- Independent clamping- messenger remains clamped if pole shrinkage occurs

Material
Ductile iron hot dip galvanized

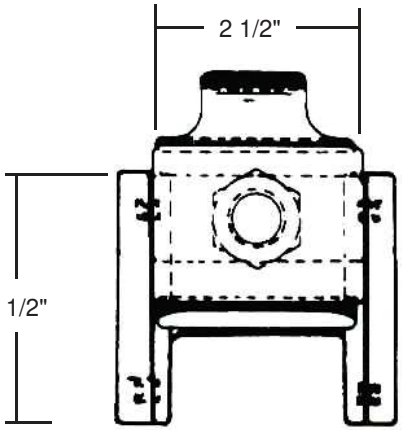

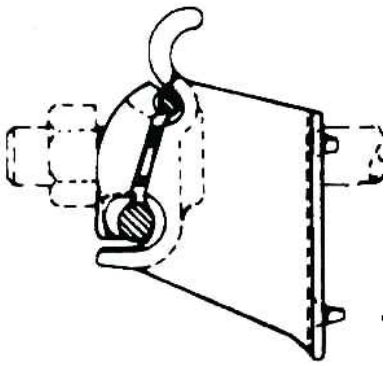

Catalog Number	Mounting Bolts	Pole Clearance	Ground Wire	Messenger Range (in)	Weight /100 (lbs)
SB32/42	5/8”	1 1/2”	0.16 - 0.37	0.25 - 0.56	150

© Copyright 2010 MacLean Power Systems
Issued: May 2010
Supercedes: n/a

11411 Addison Avenue, Franklin Park, IL 60131
T: 847.455.0014 F: 847.455.0029
www.macleanpower.com