



PLACE

SHALE

CONTEMPORARY
DESIGN AND
NATURAL LOOK

24"x24" _ 12"x24" SHALE

SHALE

The material offers a genuine natural feel, also thanks to the surface structures that have a richly varied movement.



24"x24" _ 12"x24" SHALE





24"x24" AMBER

AMBER

WIDE RANGE
OF COLORS
AND HUES

AMBER



Each piece is rich in colors and graphics that stand out when installed on floors, showing the aesthetic variability typical of the most precious slates.





24"x24" _12"x24" RUST

RUST



24"x24" _12"x24" RUST

Caesar's porcelain stoneware is an elegant and functional material, also for the floors of public spaces.





WALL_12"x24" AMBER_12"x24" 12"x24" Brickmix ALMOND
FLOOR_12"x24" AMBER_18"x36" ALMOND

ALMOND

BATHROOM
WALLS FOR
IMPRESSIVE
EFFECT

ALMOND

Thanks to its 3 sizes, 2 types of mosaics and harmonious color combinations, the Place range allows to interpret bathroom ambiances for major aesthetical effect.



WALL_12"x24_12"x24" Brickmix ALMOND
FLOOR_12"x24" AMBER_18"x36" ALMOND







ALMOND

Rectified_Squared_One caliber


- Porcelain Stoneware
- Floor
- Wall
- Substantial Variation
- BOOT 3000 compliant
- Thickness 3/8" (9mm)
- Rectified Tile
- NO V.O.C
- Frost Proof
- Low water absorption (<0,5%)
- Made in Usa

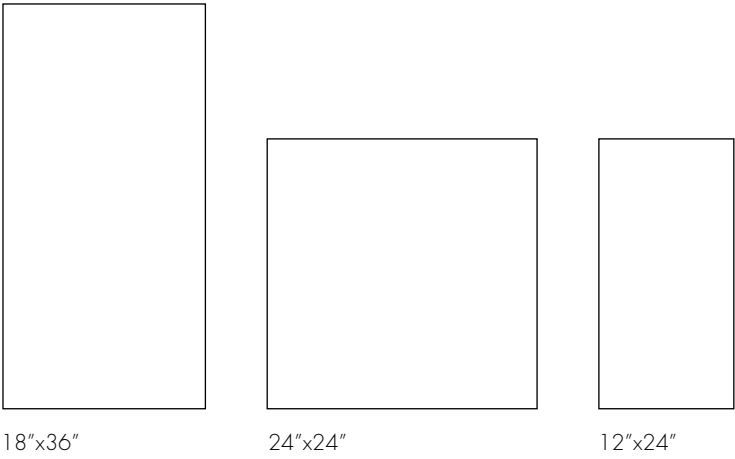

DECORS

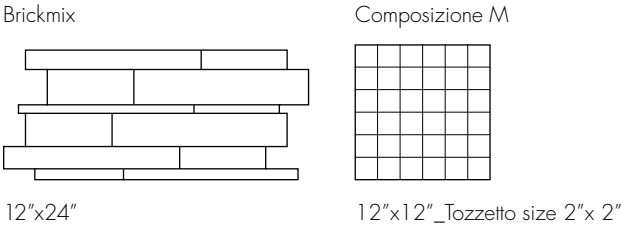

TRIMS

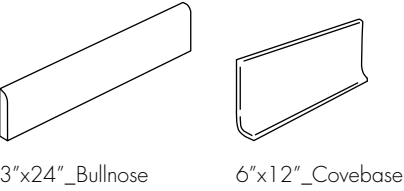





AMBER

Rectified_Squared_One caliber


- Porcelain Stoneware
- Floor
- Wall
- V4 Substantial Variation
- BOOT 3000 compliant
- Thickness 3/8" (9mm)
- Rectified Tile
- NO V.O.C
- Frost Proof
- Low water absorption (<0,5%)
- Made in Usa

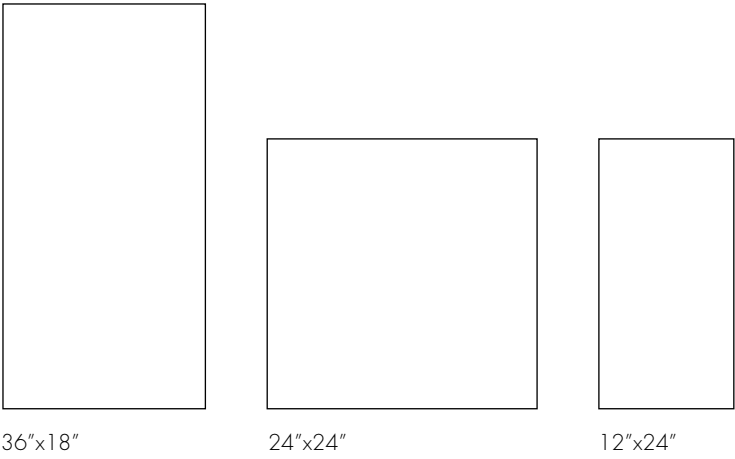

DECORS

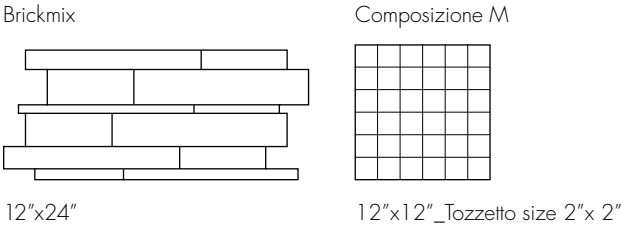

TRIMS

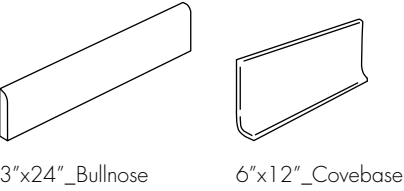



SHALE

Rectified_Squared_One caliber

- 

Porcelain
Stoneware
- 

Floor
- 

Wall
- 

Substantial
Variation
- 

BOOT 3000
compliant
-
- 


Rectified Tile
- 

NO
V.O.C
- 


Frost
Proof
- 

Low water
absorption
(<0,5%)
- 


Made
in Usa

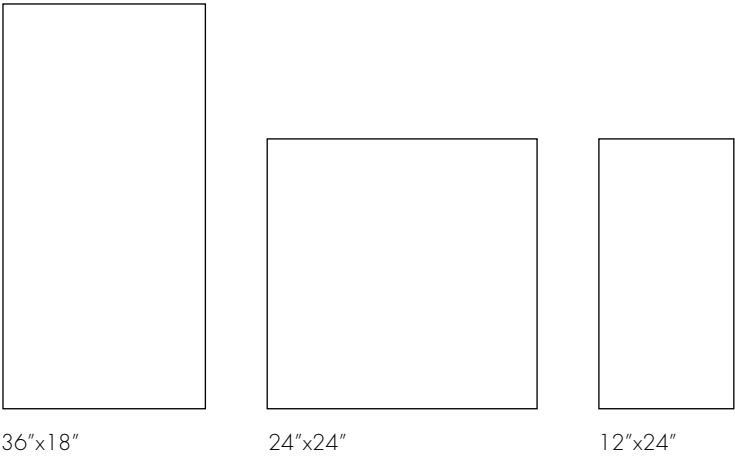

DECORS

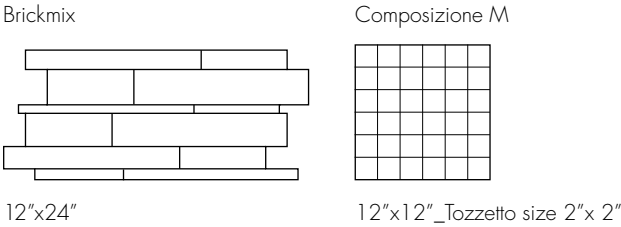

TRIMS

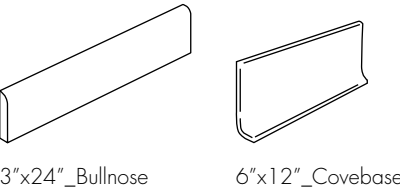



RUST

Rectified_Squared_One caliber

- 

Porcelain
Stoneware
- 

Floor
- 

Wall
- 

Substantial
Variation
- 

BOOT 3000
compliant
- 

Thickness
3/8" (9mm)
- 


Rectified Tile
- 

NO
V.O.C
- 

Frost
Proof
- 


Low water
absorption
(<0,5%)
- 

Made
in Usa

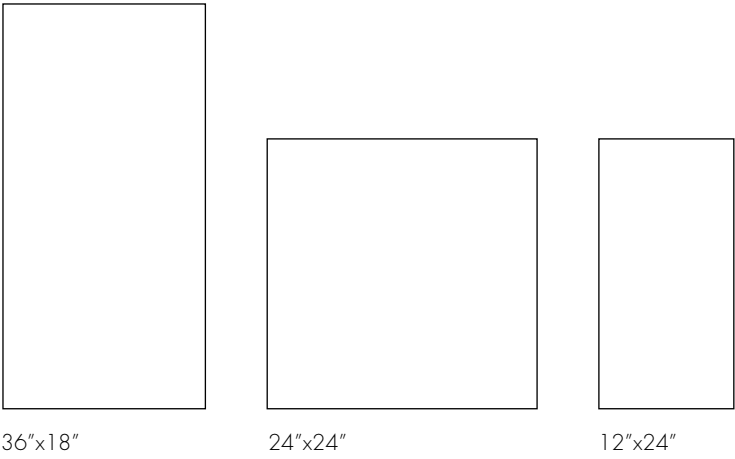


DECORS

Brickmix




12"x24"

Composizione M




12"x12" _Tozzetto size 2"x 2"

TRIMS



3"x24" _Bullnose



6"x12" _Covebase

COLORED-BODY PORCELAIN TILES - RECTIFIED, ONE CALIBER

Colored-body porcelain stoneware tiles are produced minimizing the color difference between the glaze and the body. Nevertheless, the design is visible only on the surface.

Porcelain Stoneware

Floor

Wall

Substantial Variation

BOOT 3000 compliant

Thickness 3/8" (9mm)

Rectified Tile

NO V.O.C

Frost Proof

Low water absorption (<0,5%)

Made in Usa

18"x36"
457x914 MM

24"x24"
610x610 MM

12"x24"
305x610 MM

3"x24"
Bullnose

6"x12"
Covebase

Shale					
Amber					
Rust					
Almond					

● Matt / rectified one caliber

PACKAGING											
SIZE		BOX					PALLET				
INCHES	MM	PCS	SURFACE (SQF)	SURFACE (SQM)	WEIGHT (LBS)	WEIGHT (KG)	BOXES	SURFACE (SQF)	SURFACE (SQM)	WEIGHT (LBS)	WEIGHT (KG)
18"x36"	457x914	3	13,08	1,215	~53,57	~24,3	36	470,88	43,74	~1928,52	~874,8
24"x24"	610x610	3	11,62	1,08	~47,62	~21,6	40	464,8	43,2	~1904,8	~864
12"x24"	305x610	6	11,62	1,08	~47,62	~21,6	40	464,8	43,2	~1904,8	~864

V0

Very Uniform appearance.
Pieces of the same shade value are very uniform and smooth in texture. They can be measured for small color differences and are in compliance with the color uniformity requirements of tables 6-10 (ANSI A137.1-2012)

V1

Uniform Appearance.
Differences among pieces from the same production run are minimal.

V2

Slight Variation.
Clearly distinguishable texture and/or pattern within similar colors.

V3

Moderate Variation.
While the colors and/or textures present on a single piece of tile will be indicative of the colors and/or texture to be expected on the other tiles, the amount of colors and/or texture on each piece may vary significantly. It is recommended that the range be viewed before selection.

V4

Substantial Variation.
Random color and/or texture differences from tile to tile, so that one tile may have totally different colors and/or textures from that on other tiles. Thus, the final installation will be unique. It is recommended that the range be viewed before selection.

Color reproductions may vary from actual products.

Caesar reserves the right to modify the products illustrated in this catalogue for reasons of production or to improve quality. Samples are purely indicative. Packaging and weights may vary for production reasons. Contact our sales department when ordering.

In case of running pattern installation, Caesar recommends a maximum 33% offset.

Caesar warrants that our products meet or exceed the requirements of ANSI, specification ANSI A137.1 : 2012, as shown in our Tile Performance Data sheets.

TILE PERFORMANCE DATA

COLORED-BODY PORCELAIN TILES - RECTIFIED, ONE CALIBER
CLASSIFICATION IN ACCORDANCE WITH ANSI A137.1: 2012 (P1 CLASS).

	TECHNICAL FEATURE	ASTM TEST	VALUE REQUIRED ANSI A 137.1-2012	CAESAR AVERAGE VALUE
	Facial dimension	ASTM C-499	±0,5% o ±2,0 mm	In accordance to ANSI A 137.1-2012
	Thickness	ASTM C-499	0,040 inch max (1 mm)	
	Wedging	ASTM C-502	≤ 0,5% (+/- 2 mm)	
	Warpage diagonal	ASTM C-485	≤ 0,5% (+/- 2 mm)	
	Warpage edge (for tile <610x610 mm)	ASTM C-485	±0,40% or ±1,3 mm	
	Warpage edge (for tile >610x610 mm)	ASTM C-485	±0,40% or ±1,8 mm	
	Water absorption	ASTM C-373	≤ 0,5%	Passed "impervious tiles" Class P1
	Breaking strength	ASTM C-648	≥ 250 lbs (>=1113 N)	>=400 lbs
	Freeze thaw	ASTM C-1026	No damages	In accordance
	Chemical resistance	ASTM C-650	As reported	Unaffected
	MOHS hardness			Coeff. 6
	BOOT 3000 DCOF *	BOOT 3000	0,42	In accordance

Average values referred to the last two years of production and related to the matt finish of the product.
Values relate to the matt finish of the product and to tests carried out by certified external laboratories, whose results are available upon request at Headoffice.
Be sure to use the same caliber tiles.
Color reproductions may vary from actual products.
* Due to the intrinsic nature of porcelain stoneware tiles, please note that the coefficient of friction may vary within the same production lot or from one production lot to the other. Caesar products can become slippery when wet. We recommend to always keep the surface dry.