

Perlator®

Faucet Aerator - 1.5 gpm max

Flow Restricted Regular Size



Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free stream, well aerated and soft to the touch.
- ▶ Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime build up.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Compatible with regular and vandal proof M22 and M24 metric housings.
- ▶ Available housing finishes: unplated, chrome and PVD.
- ▶ Laser marked housings: custom logo and/or statutory marks.

Certifications

ANSI/NSF®-61-372

ASME A112.18.1M and CSA B125

Meets **CALGreen** requirements

WaterSense



Options Available

Part #	Designation
40.2010.000	Insert only
40.2010.613	Regular male 15/16"-27
40.2010.623	Regular female 55/64"-27
40.2010.673	Regular dual thread 15/16"-27 / 55/64"-27
40.2010.723	Vandal proof regular male 15/16"-27
40.2010.733	Vandal proof regular female 55/64"-27
40.2010.603	Vandal proof dual thread
BX.399C.1	Regular vandal key



*Other combinations also available

- WSA applies to insert only

Color Code

Dome: Green	Diffuser: Green	Basket: Dark Gray
-------------	-----------------	-------------------

Flow Rate Curve

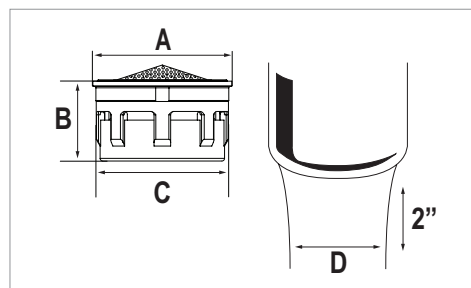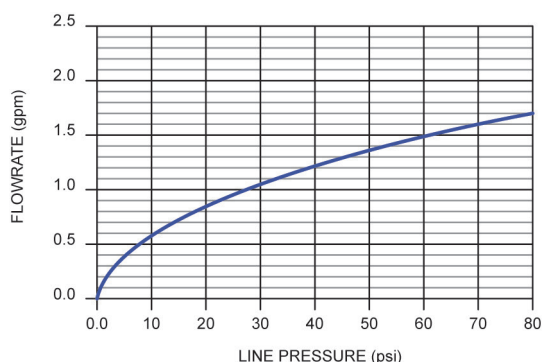

Dimensions

No	mm	In
A	20.88	.822
B	12.00	.472
C	19.97	.786
D	≈ 13	≈ 1/2

Housings




Technical Data

Materials: Body Acetal
Washer EPDM
Wetted surface area: 3458mm²

Continuous

Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.



NEOPERL, Inc., Waterbury, CT • Tel: 203-756-8891 • Fax: 203-755-5717 • www.neoperl.com