


VISUAL EXPERIENCE with QUADRATECH DATA SHEET

VXQ48 TECHNICAL SPECIFICATIONS

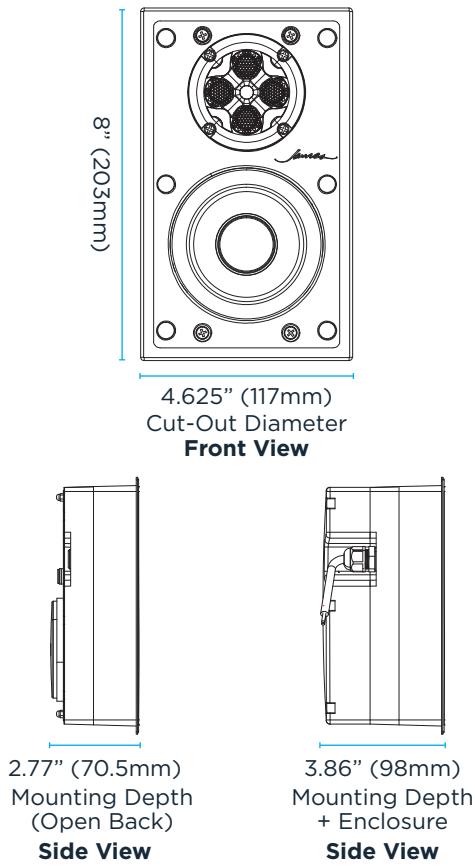

SKU	VXQ48 66046 - Each
Tweeter	0.50" (12mm) Four titanium domes, Ferrofluid-cooled, acoustic back chamber
Woofer	4.5" (114mm) Aluminum cone, Santoprene surround
Dispersion Technology	Quadratet Tweeter with Cymatic Diffuser
Frequency Response	50Hz - 20kHz +/-3dB
Impedance	8 ohms nominal; 6 ohms minimum
Recommended Power	5 watts minimum; 100 watts maximum
Sensitivity (2.83V/1m)	90dB SPL
Mounting Technology	1-stage, 4 x RotoLock® Clamps
Environmental	Conforms to Military Standard 810G for humidity, salt spray, temperature & UV, IP-67 waterproof rating
Operational Temperature Range	-40°C to 90°C
Micro Trim Grille (WxH)	5.49" x 8.82" (139.5mm x 224.1mm)
Trimless Grille (WxH)	5.13" x 8.46" (130.2mm x 214.8mm)
Speaker Mounting Depth (D)	2.77" (70.5mm)
Mounting Depth + Encl.	3.86" (98mm)
Cut-Out Dims (WxH)	4.625" x 8" (117mm x 203mm)
Shipping Weight	6 lbs. (2.8kg)

VXQ 4" RECTANGLE ACCESSORIES

VXQ4-GRILLE-T	
4" XPC Micro Trim Rectangle Grille / Each	60481
VXQ4-GRILLE-NT	
4" XPC Trimless Rectangle Grille / Each	60482
VXQ4-SE	
4" Rectangle Shallow Enclosure / Each	60472
FLEXBRK-4	
4" Rectangle Flex Bracket / 5x Pair	92470

James by Sonance warrants this product to the original purchaser to be free from defects in materials and workmanship under normal use. **Limited Lifetime Warranty** applies to indoor installations. **Limited Five (5) Year Warranty** applies to outdoor or moisture-dense environments (e.g., spas, showers, saunas). **Grille is warranted for five (5) years for both indoor and outdoor use.** Warranty valid only for products purchased from authorized dealers and installed per manufacturer guidelines. Excludes damage from misuse, accidents, modifications, improper installation, or normal wear. For details or claims, visit sonance.com/company/contact

©2026 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com.