

For Residential and Commercial Applications

Job Name: _____ Engineer/Architect: _____
 Job Location: _____ Wholesaler: _____
 Submittal Date: _____ Contractor: _____

B1-**KC Speedi Plumb® PLUS Braided Faucet Connectors - Compression Inlet x KC Nosepiece Outlet

Use: For use in potable water distribution systems in accessible locations only.


Design Features:

- **Engineered polymer braided** fibers bend freely without kinking or crimping
- **Reinforced PVC inner hose** provides added durability
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection
- **✓**

Operating Specifications:

Temperature: 40°- 160° F, intermittent to 180° F
Pressure: 125 PSI maximum

Tubing Diameter: 0.300" ID (0.550" OD)




CONNECTOR MATERIAL SPECIFICATIONS	
Inner Hose	<i>Reinforced PVC</i>
Braiding	<i>PVC coated yarn</i>
Barb	<i>Brass</i>
Ferrule	<i>Stainless steel</i>
Washer	<i>Rubber</i>
Compression Ring	<i>Brass</i>
Compression Nut	<i>Brass, plated</i>
KC Barb	<i>Brass, plated</i>

Part Listing:

- B1-12KC F 3/8" compression x 3/8" OD compression x 12" length
- B1-16KC F 3/8" compression x 3/8" OD compression x 16" length
- B1-20KC F 3/8" compression x 3/8" OD compression x 20" length

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Co., and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

B1-KC Speedi Plumb® PLUS Braided Faucet Connectors - Compression Inlet x KC Nosepiece Outlet

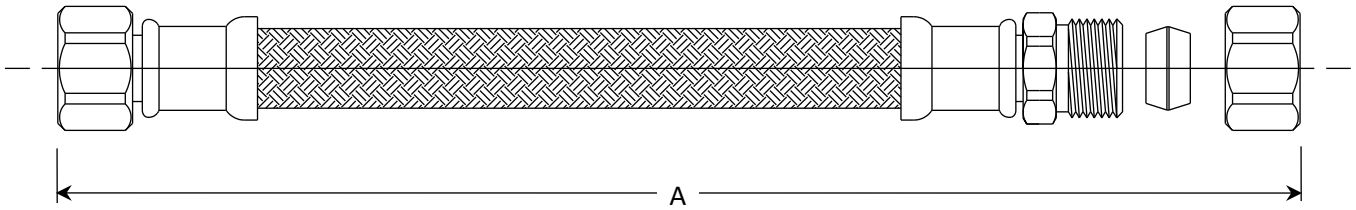

PART DIMENSIONS (Inches)	
Model	DIM. A
B1-12KC	12.0 / 13.0
B1-16KC	16.0 / 17.0
B1-20KC	20.0 / 21.0

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6
- IAPMO listed to NSF/ANSI 372 for Low-Lead Compliance
- IAPMO listed to NSF/ANSI/CAN 61



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Co., and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BrassCraft®