




THROUGH-THE-WALL AIR CONDITIONER

WITH HEAT | 14,000 BTU | ELECTRONIC

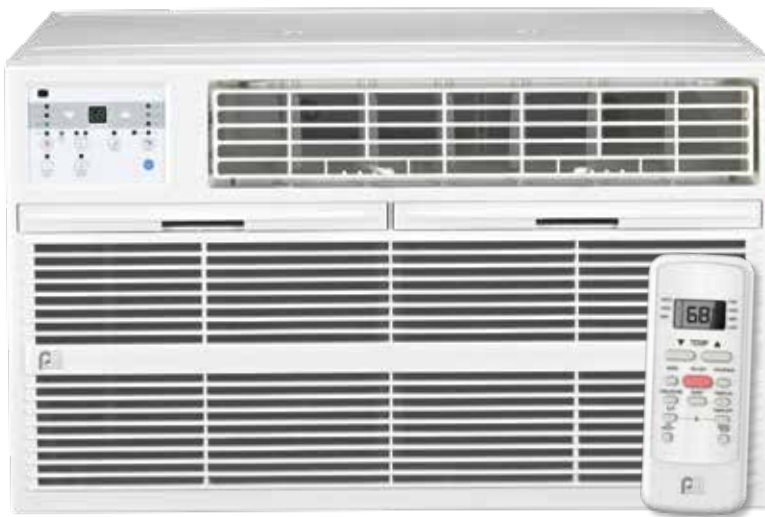


4PATWH14002

UPC CODE	842149000660
COOLING CAPACITY (BTU)	14000
HEATING CAPACITY (BTU)	10600
ENERGY STAR	No
COVERAGE AREA (sq. ft.)	700
CEER	9.3
VOLTAGE	208/230V
AMPS	6.9/7.5
WATTS	1505/1431
FAN SPEEDS (cool/fan/heat)	3/3/1
UNIT DIMENSIONS (W×H×D) (in.)	24.25×14.25×20.25
PKG. DIMENSIONS (W×H×D) (in.)	28×17×27
WEIGHT (Net/Gross) (lbs.)	78/88
CONTAINER QTY. (40HQ)	306
REFRIGERANT	R32
OUTLET CONFIGURATION	 20A - 230V

CHOOSING THE RIGHT AIR CONDITIONER

1 MEASURE AREA OF THE ROOM



2 MATCH ROOM SIZE WITH CORRECT BTUs

SQ. FT.	ROOM SIZE	BTUs
150	10' × 15'	5,000
250	10' × 25'	6,000
350	17' × 20'	8,000
450	15' × 30'	10,000
550	20' × 27'	12,000
700	20' × 35'	15,000
1,000	25' × 40'	18,000
1,500	30' × 50'	25,000

3 MAKE ANY ADJUSTMENTS



INCREASE BTU 10%
FOR SUNNY ROOMS. DECREASE
BTU 10% FOR SHADED ROOMS.



ADD 600 BTUs
FOR EACH ADDITIONAL
PERSON OVER TWO.



ADD 4,000 BTUs
IF UNIT IS USED IN
A KITCHEN.

FEATURES

- Fits most standard through-the-wall AC sleeves
- 3 cooling and fan speeds & 1 heat speed
- 4-way adjustable air vents
- Cool, Heat, Fan, Eco, and Sleep modes
- Quick & easy installation
- Mounting kit included
- Electronic controls
- Follow-me remote control acts as portable thermostat
- 24-hour timer
- Auto-restart
- Adjustable thermostat (62-86°F)
- Easy clean slide out filter

